



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

## TOP MOUNT CROSS TEMP®

### Model: CT1HC-1G

GLASS DOOR / REACH-IN REFRIGERATOR/FREEZER



## 7 YEAR WARRANTY Parts, Labor, and Compressor

### CABINET CONSTRUCTION

- Exterior is stainless steel front with continuous coil coated sides
- Interior liner is made of corrosion resistant aluminum
- Expansion valve technology
- Easily converts from refrigerator to freezer
- Single cabinet configurable to all menu initiatives, temperature range of -15 to 40° F
- Modulates coil temp to achieve desired set point
- Intuitive compressor
- Quicker pull-down
- Improved product stability
- Rapid recovery defrost
- Three (3) epoxy coated shelves
- Field-reversible door
- 6" Casters with (2) brakes



### OPTIONS & ACCESSORIES

- Stainless steel exterior
- Stainless steel interior
- Stainless steel tray (A)
- Universal tray slide (AC)
- Epoxy coated wire rod tray slide (kit #4)
- Door lock
- Additional shelves
- Left hand hinged
- 3" Casters
- 6" Flanged legs

### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Variable speed compressor technology achieve 30% more energy efficiency
- Adaptive defrost
- Epoxy coated evaporator coil




# BEVERAGE-AIR®

**Cross Temp®**  
**Model: CT1HC-1G**


PLAN VIEW

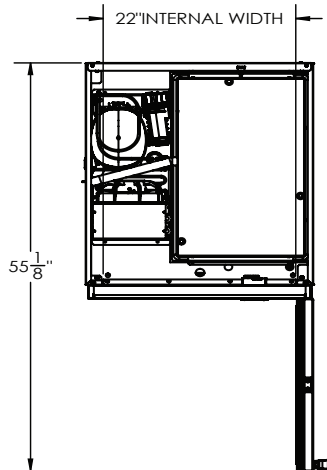

ELEVATION VIEW

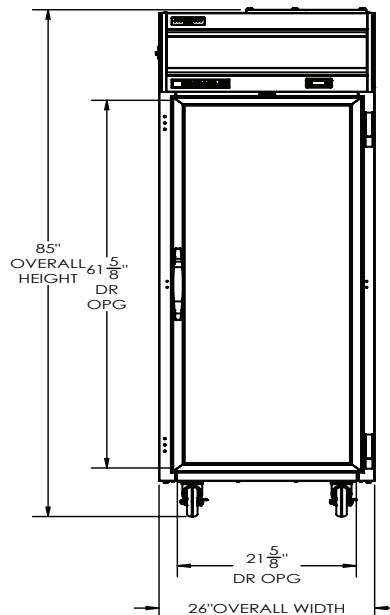

SIDE VIEW

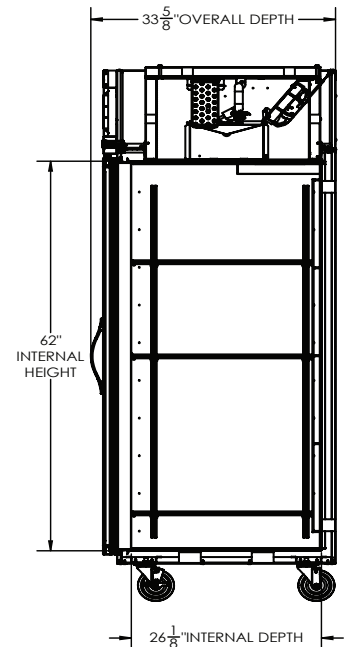

## EXTERNAL DIMENSIONAL DATA

|                               |                   |
|-------------------------------|-------------------|
| Width Overall (in)            | 26"               |
| Depth Overall (in)            | 33 3/4"           |
| Height Overall (in)           | 85"               |
| Number of Doors               | 1                 |
| Depth with Door open 90° (in) | 55 1/8"           |
| Door Openings (in)            | 21 5/8" x 61 5/8" |

## INTERNAL DIMENSIONAL DATA

|                              |         |
|------------------------------|---------|
| NET Capacity (cubic ft.)     | 23.1    |
| Internal Width Useable (in)  | 22"     |
| Internal Depth Overall (in)  | 26 1/8" |
| Internal Height Overall (in) | 62"     |
| Number of Shelves            | 3       |

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

\* NOTE: Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

Required Clearance: Top 12" & Rear 3"

## ELECTRICAL DATA

|                     |            |
|---------------------|------------|
| Full Load Amps      | 8.0        |
| Voltage             | 115/60/1 * |
| Nema Plug (8' cord) | 5-15P      |

## REFRIGERATION DATA

|                           |                    |
|---------------------------|--------------------|
| Horsepower                | 4/5                |
| Capacity (BTU/Hr)         | 1970 - 4950        |
| Heat Rejection (BTU/Hr)   | 2955 - 7425        |
| Charge (lbs/grams/ounces) | 0.286 / 130 / 4.58 |

## SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 340 lbs. |
| Height - Crated (in)  | 88"      |
| Width - Crated (in)   | 41"      |
| Depth - Crated (in)   | 36"      |



## ELECTRICAL CONNECTION

115/60/1  
5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 9/25 | Printed in U.S.A.