

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SM SCHOOL MILK COOLERS

SM49HC Single Access, Cold Wall Hydrocarbon Series

MODELS: SM49HC-S SM49HC-W



SM49HC-S



OPTIONS & ACCESSORIES

- Wrap around & corner bumpers
- Graphics

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- SS units: Stainless steel exterior and interior
- White units: White coated steel exterior and interior is galvanized steel with stainless steel floor for maximum milk crate support.
- Lids, doors, adjustable hinges and door latches made from stainless steel are standard on all units
- Full electronic Control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 4" Heavy-duty plate casters (2 with locks)
- Maintains continuous milk temperature between 36° 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















SM Series—School Milk Cooler

Models: SM49HC-1-S, SM49HC-1-W

MODEL	SM49HC-1-S	SM49HC-1-W
EXTERNAL DIMENSIONAL DATA		
Width Overall	49"	49"
Depth Overall with Lids/Doors Extended	30 5/8"	30 5/8"
Height Overall with 4" Casters	41 1/8"	41 1/8"
Number of Lids/Doors	Single Access	Single Access
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	20.32	20.32
Internal Width Overall (in)	46"	46"
Internal Depth Overall (in)	27"	27"
Internal Height Overall (in)	25 3/4	25 3/4
CASE CAPACITIES		
13" x 13" x 11"	12	12
19" x 13" x 11"	8	8
ELECTRICAL DATA		
Full Load Amperes 115/60/1	2.2	2.2
REFRIGERATION DATA		
Horsepower	1/3	1/3
Capacity BTU	1367	1367
WEIGHT DATA		
Gross Weight (Crated lbs)	339 lbs	339 lbs
Height - Crated	44"	44"
Width - Crated	52"	52"
Depth - Crated	34"	34"

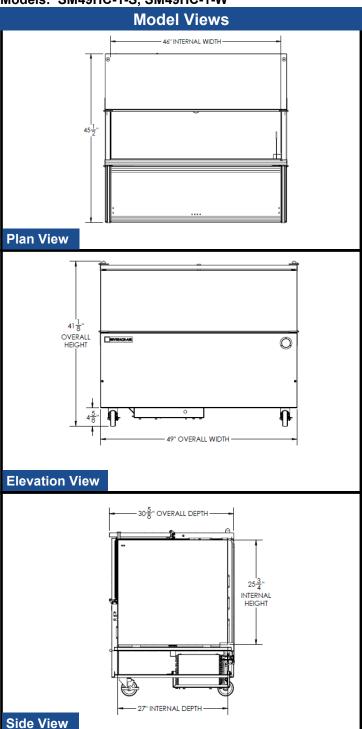

ELECTRICAL CONNECTION

















Units pre-wired at factory and include 8' long cord and plug set.



