B	EVERAGE-AIR
---	-------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

ST SCHOOL MILK COOLERS

ST58HC Dual Access, Cold Wall Hydrocarbon Series

MODELS: ST58HC-S ST58HC-W



ST58HC-S



OPTIONS & ACCESSORIES

- Wrap around & corner bumpers
- Custom graphics

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- SS units: Stainless steel exterior and interior
- White units: White coated steel exterior and interior is galvanized steel with stainless steel floor for maximum milk crate support.
- Lids, doors, adjustable hinges and door latches made from stainless steel are standard on all units
- Full electronic Control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 4" Heavy-duty plate casters (2 with locks)
- Maintains continuous milk temperature between 36° 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, nom-electric defrost
- Epoxy coated evaporator coil


















ST Series—School Milk Cooler

Models: ST58HC-S, ST58HC-W

MODEL	ST58HC-S	ST58HC-W	
EXTERNAL DIMENSIONAL DATA			
Width Overall	58"	58"	
Depth Overall	31 1/4"	31 1/4"	
Depth Overall with Lids/Doors Extended	61"	61"	
Height Overall with Casters	41 1/8"	41 1/8"	
Number of Lids/Doors	Dual Access	Dual Access	
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	22.5	22.5	
Internal Width Overall (in)	55"	55"	
Internal Depth Overall (in)	27"	27"	
Internal Height Overall (in)	25 1/2"	25 1/2"	
CASE CAPACITIES			
13" x 13" x 11"	16	16	
19" x 13" x 11"	10	10	
ELECTRICAL DATA			
Full Load Amperes 115/60/1	3.7	3.7	
REFRIGERATION DATA			
Horsepower	1/2	1/2	
Capacity BTU	2149	2149	
WEIGHT DATA			
Gross Weight (Crated lbs)	372 lbs	372 lbs	
Height - Crated	47"	47"	
Width - Crated	61"	61"	
Depth - Crated	34"	34"	

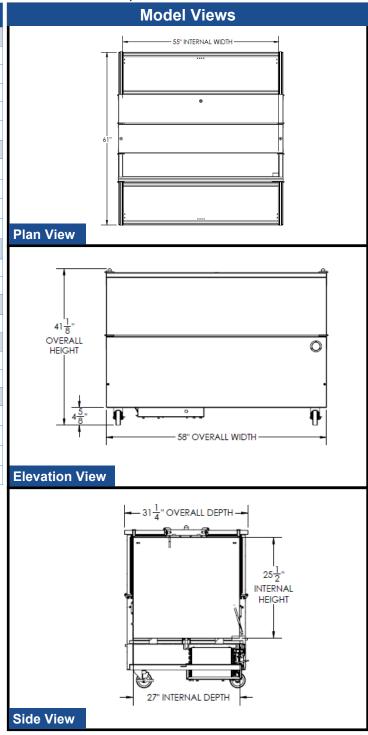

ELECTRICAL CONNECTION







Units pre-wired at factory and include 8' long cord and plug set.



