



Camshelving® Premium Series

Mobile Drying and Storage Racks

3 Shelves – Vertical

HEIGHTS	DEPTHS	LENGTHS
1	1	2
75"	24"	48" 60"

4 Shelves – Angled

HEIGHTS	DEPTHS	LENGTHS
1	1	1
75"	24"	48"

5 Shelves – Dome

HEIGHTS	DEPTHS	LENGTHS
1	1	1
75"	21"	36"

- **Vertical Drying and Storage Rack includes:**
2 factory assembled mobile post kits, 6 shelf traverses, 12 or 15 vertical drying cradles and 4 premium swivel casters with total locking brake. 48" long - 5 cartons. 60" long - 6 cartons.
- **Angled Drying and Storage Rack includes:**
2 factory assembled mobile post kits, 8 shelf traverses, 16 angled drying cradles and 4 premium swivel casters with total locking brake. Ships in 5 cartons.
- **Dome Drying and Storage Rack includes:**
2 factory assembled mobile post kits, 10 shelf traverses, 10 dome drying cradles and 4 premium swivel casters with total locking brake. Ships in 3 cartons.



Features & Benefits

- Promote sanitary drying, safe handling and efficient product organization with easy access to product. The Vertical Drying and Storage Rack can be used for trays, cutting boards, lids, and/or baking sheet pans. Maximum product width 1 5/16". Store up to 100 patient meal delivery domes or plate covers upright in the Dome Drying and Storage Rack. Use the Angled Drying and Storage Rack to securely hold a variety of food pans, pots, bowls and other kitchen wares or patient meal delivery pellets.
- Ideal for use in all commercial and non-commercial kitchens including warewashing areas.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts. NOTE: Mobile units require Mobile Posts for assembly.
- Premium caster is made of highly durable, non-corrosive plastic with a 5" (12,7 cm) swivel, non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.
- Optional donut bumper offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.

Item No. _____


Quantity _____

AIA File / Spec No. _____

Job _____



Vertical Drying and Storage Rack

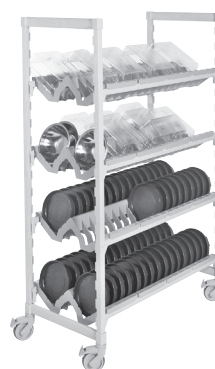


Angled Drying and Storage Rack



Dome Drying and Storage Rack

4 Shelf Unit Weight Bearing Chart

Mobile Unit

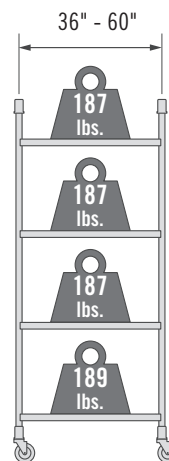

750 lbs.

Maximum
Unit Capacity

- Drying and Storage Cradles install directly onto shelf traverses. Made of highly durable ABS plastic. Dishwasher safe.
- Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised.
- Posts and traverses easily wipe clean. Traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Approvals



COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

Camshelving® Premium Series

Mobile Drying and Storage Racks

3 Shelves – Vertical

4 Shelves – Angled

5 Shelves – Dome

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

75"

HEIGHT

Vertical Drying and Storage Rack

24"

DEPTH

CODE	DIMENSIONS D x L x H	HOLDING CAPACITY
CPMU244875DRPKG	24" x 48" x 75"	84 Trays
CPMU246075DRPKG	24" x 60" x 75"	105 Trays



Angled Drying and Storage Rack

24"

DEPTH

CODE	DIMENSIONS D x L x H	HOLDING CAPACITY
CPMU244875PDPKG	24" x 48" x 75"	128 Pellets and Bases or 16 GN 1/1 Food Pans



Dome Drying and Storage Rack

21"

DEPTH

CODE	DIMENSIONS D x L x H	HOLDING CAPACITY
CPMU213675DDPKG	21" x 36" x 75"	100 Domes

Color: Speckled Gray (480).



Optional Accessories

- ☐ Donut Bumper
- ☐ Shelf Identification Tags

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
Post Connectors: Reinforced polypropylene.
Drying Cradles: High impact ABS material.
Caster: Non-corrosive plastic body and brake with non-marking thermoplastic rubber wheel.

Approvals



COMPONENT

Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com
Printed in USA. REV. 09/16

PS9

D081607