WORKTOP REFRIGERATOR

Model: SW32-GD

32" Worktop Display Refrigerator with Hinged Glass Door

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Backsplash (-BS model) |
|--|---|
| Stainless steel back | Solid door |
| Overshelves (single or double) | Expansion valve system |
| Add'l epoxy-coated steel shelves | Adjustable legs |
| Stainless steel shelves | Door lock |
| Automatic electric condensate evaporator | Special electrical requirements (consult factory) |
| Drawers in lieu of door (-D model) | |

Consult factory for other model configurations, options and accessories.



Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Double pane, low-e, tempered hinged glass door

Magnetic snap-in door gasket

Heavy-duty, epoxy-coated steel shelf

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Electronic controller w/ digital display & hi-low alarm LED interior lighting



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|--|------------------|
| Net Capacity (cu. ft.) | 9.0 (253 cu I) |
| Width, Overall (in.) | 32 (813 mm) |
| Depth, Overall (in.) (incl. handle & bumpers) | 31 7/16 (799 mm) |
| Depth, Body Only (in.) (less door) | 27 1/2 (699 mm) |
| Height, Overall (in.) (incl. 5" casters) | 35 1/4 (895 mm) |
| Shelf Area (sq. ft.) | 3.9 (.4 sq m) |
| No. of Shelves | 1 |
| No. of Doors | 1 |
| Interior Depth (in.) | See Drawing |
| Interior Height (in.) | 26 1/4 (667 mm) |
| Interior Width (in.) | 28 (711 mm) |
| REFRIGERANT DATA | |
| Condensing Unit Size (H.P.) | 1/5 |
| Capacity (BTU/Hr)* | 1620 |

10 ft. Cord/Plug [attached] (int'l)

Total Amps (int'l)

ELECTRICAL DATA

Voltage (int'l)

Fans

| SHIPPING DATA | |
|-----------------------|------------------|
| Weight (lbs.) | 235 (107 kg) |
| Height - Crated (in.) | 43 1/4 (1099 mm) |
| Width - Crated (in.) | 40 (1016 mm) |
| Depth - Crated (in.) | 37 1/4 (946 mm) |

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

115/60/1 (220/50/1)

2

7.0 (3.7)

Yes (No)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

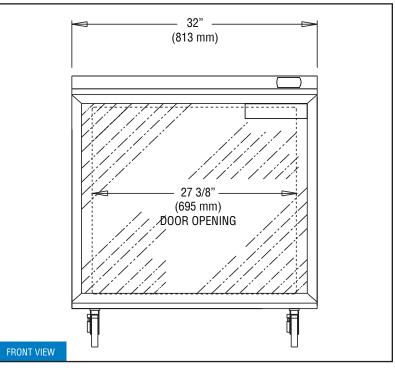

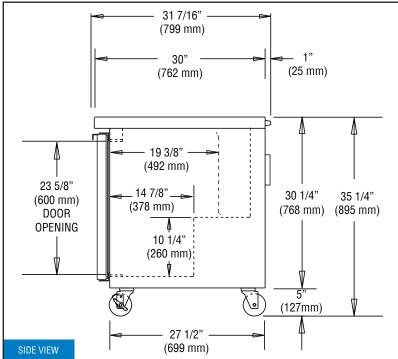

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>