

DESIGNER LINE WARMER

Model: DL1W

1-Section Reach-In Warmer

DL1W - Stainless steel front, aluminum end panels and interior
DL1W-SA - Stainless steel exterior, aluminum interior
DL1W-SS - Stainless steel exterior and interior



Designer Line

Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pass-Thru
Add'l chrome-plated steel shelves	Special electrical req. (consult factory)
Stainless steel shelves	Correctional Facility Options
Pan slide assemblies	<ul style="list-style-type: none">One way security screws
Gasters	<ul style="list-style-type: none">Locking hasp (lock not included)
Custom laminates	<ul style="list-style-type: none">Stainless steel mesh cover
Half doors	<ul style="list-style-type: none">Coverless hinges
Glass door	

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self contained, performance-rated heating system
90°F to 180°F temperture range
Top mounted heating plenum "plug" w/circulating fan
Humidity relief vent
Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handle
Cam action, lift off hinges
Self-closing door
Magnetic snap-in door gasket
Cylinder lock in door
Heavy-duty, chrome-plated steel shelves
Adjustable 6" stainless steel legs

MODEL FEATURES

Automatic interior lighting
Electronic controller w/ digital display & hi-low alarm
Stainless steel strip heaters located in base of interior
Rehinging of door (in the field)

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	21 (595 cu l)
Width, Overall (in.)	26 (660 mm)
Depth, Overall (in.) (incl. handle)	35 3/8 (899 mm)
Depth [less door] (in.)	32 (813 mm)
Depth [door open 90°] (in.)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 6" legs)	83 1/4 (2115 mm)
No. of Doors	1
No. of Shelves	3
Shelf Area (sq. ft.)	20.4 (1.9 sq m)
Tray Slide Capacity	24 ea.

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (incl. ground)	3
Total Amps (int'l)	7.2 (7.2)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (int'l)	No (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu l)
Weight Std - Crated (lbs.)	284 (129 kg)
Weight SS - Crated (lbs.)	315 (143 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

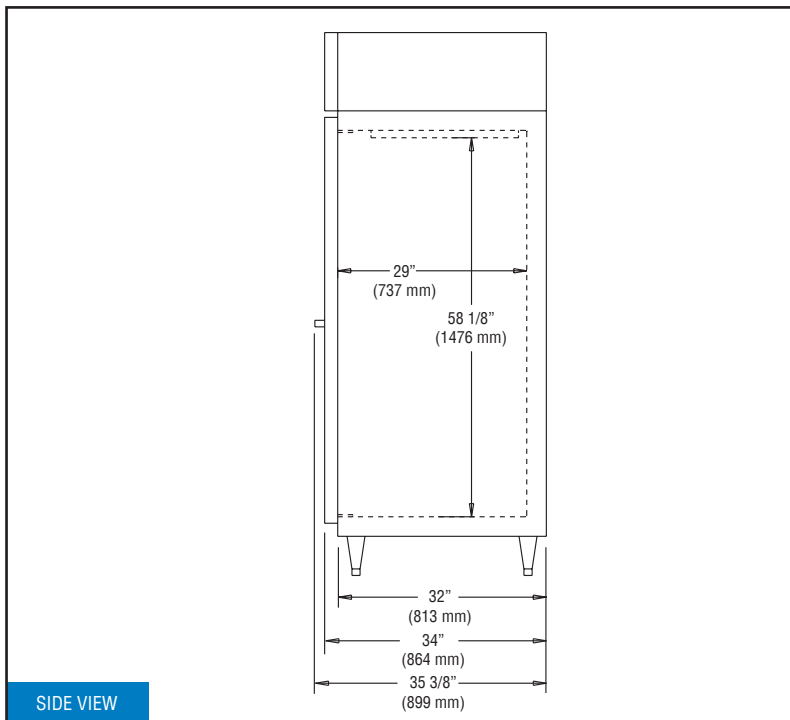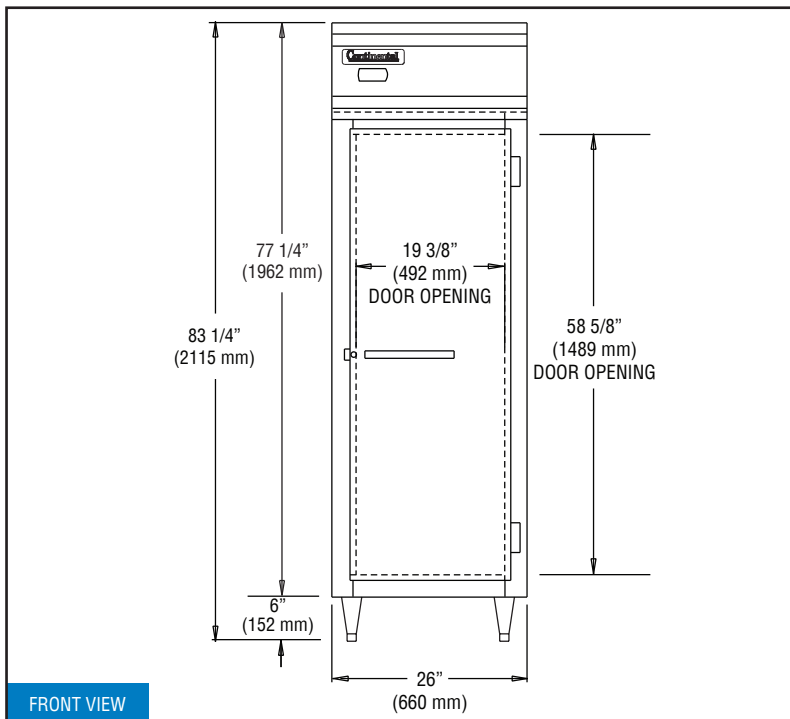

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2018. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.