# WORKTOP REFRIGERATOR

Model: SW72-GD-FB

# 72" Worktop Display Refrigerator with Hinged Glass Doors Front Breathing

Stainless steel front, top, and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Drawers in lieu of doors (-D model)	
Stainless steel back	Solid doors	
Overshelves (single or double)	Backsplash -(BS model)	
Add'l epoxy-coated steel shelves	Expansion valve system	
Stainless steel shelves	Door locks	
Automatic electric condensate evaporator	Special electrical requirements (consult factory)	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Lucation.	
Item No:	Quantity:
ILEIII NU.	Quantity.

# **Standard Model Features**

SIS #:

### **REFRIGERATION SYSTEM**

AIA #:

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Double pane, low-e, tempered hinged glass doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

Completely enclosed, vented and removable case back

3 3/4" casters

# **MODEL FEATURES**

Electronic controller w/ digital display & hi-low alarm

LED interior lighting

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20.6 (583 cu l)
Width, Overall (in.)	72 (1829 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 7/16 (799 mm)
Depth, Body Only (in.) (less doors)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 3 3/4" casters)	34 (864 mm)
Shelf Area (sq. ft.)	10.2 (.9 sq m)
No. of Shelves	3
No. of Doors	3
Interior Depth (in.)	See Drawing
Interior Height (in.)	26 1/4 (667 mm)
Interior Width (in.)	68 (1727 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2050
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	4
Total Amps (int'l)	10.9 (4.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

385 (175 kg)

42 (1067 mm)

80 (2032 mm)

37 1/4 (946 mm)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Weight (lbs.)

Height - Crated (in.)
Width - Crated (in.)


Depth - Crated (in.)






#### © Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

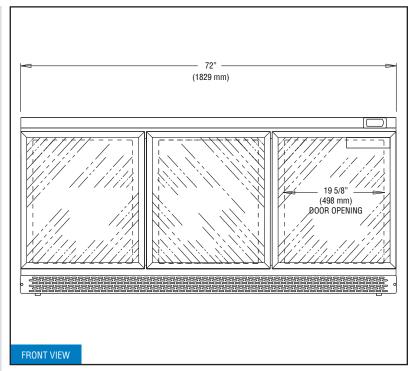

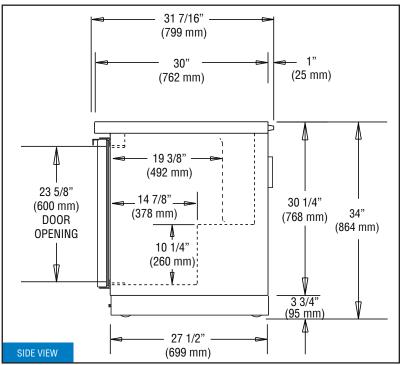

<sup>\*</sup> Rating @  $+25^{\circ}$ F evaporator,  $90^{\circ}$ F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.