BASE MODEL FREEZER (0°F)

Model: CFA60

60" Worktop Freezer with Solid Doors

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)			
Drawers in lieu of full door (larger section only)	Condensing unit left or right		
Drawer section above the condensing unit*	Overshelves (single or double)		
Stainless steel pan slides (larger section only)	Remote models		
Additional epoxy-coated steel shelves	Door locks		
Automatic, electric condensate evaporator	Adjustable legs		
Exterior dial or digital thermometer	Front breathing		
Stainless steel back and interior			

*Drawer section above condensing unit holds (1) $12 \times 20 \times 6$ pan

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-404A refrigerant

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
5" casters
Completely enclosed, vented and removable rear and side grills
Refrigerated door section above the condensing unit

MODEL FEATURES

	Expansion valve for quick recovery
	Automatic electric defrost
	Interior hanging thermometer
	Field rehingeable doors

<u>NOTE</u>: CFA60 models come standard with a door over the condensing unit, a smaller width door (left section) and larger width door (center section). A drawer over the condensing unit is an option. The option of having the door/drawers located in the opposite sections <u>MUST</u> be indicated at the time of ordering.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


APPROVAL:


Model Specifications

Mod	el	Pla	an '	Vie	WS

DIMENSIONAL DATA

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	19 (538 cu l)
Width, Overall (in.)	60 (1524 mm)
Depth, Overall (in.) (incl. handles & bumpers)	36 1/16 (916 mm)
Height, Overall (in.) (incl. 5" casters)	35 (889 mm)
Shelf Area (sq. ft.)	7.1 (.7 sq m)
No. of Shelves	4
No. of Full Doors	2
No. of Half Doors	1
Interior Depth (in.)	30 (762 mm)
Interior Height (in.)	26 (660 mm)
Interior Height (in.) (above condenser)	12 1/2 (318 mm)
Interior Width (in.)	56 (1422 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	2180
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	10.0 (4.6)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	410 (186 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	62 (1575 mm)
Depth - Crated (in.)	47 (1194 mm)

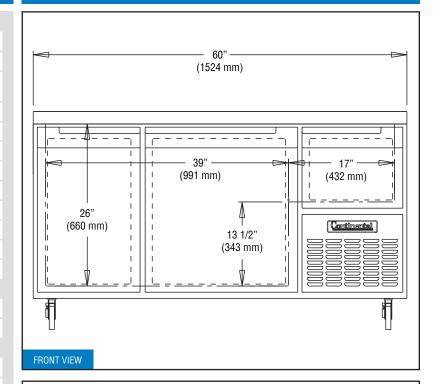

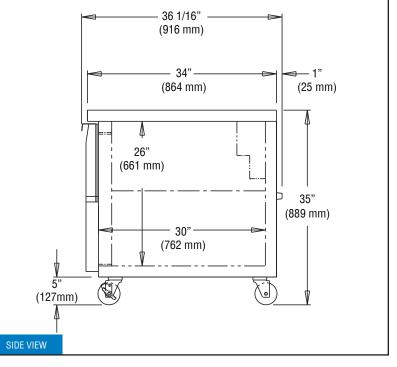

* Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2015. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.