DESIGNER LINE ROLL-IN REFRIGERATOR

Model: DL1RI

1-Section Roll-In Refrigerator with 661/4" Cart Capacity

DL1RI - Stainless steel front, aluminum end panels and interior

DL1RI-SA - Stainless steel exterior, aluminum interior

DL1RI-SS- Stainless steel exterior and interior

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass door	
Epoxy-coated steel shelves	Increased refrigeration systems	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Rehinging of door (consult factory)	Correctional Facility Options	
Expansion valve system	One way security screws	
Custom laminates	Locking hasp (lock not included)	
Half doors	Stainless steel mesh cover	
Roll-Thru	Coverless hinges	

Consult factory for other model configurations, options and accessories

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
	-	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated "plug" refrigeration system

Refrigeration system is accessible on top of cabinet, separate from the "food zone"

Automatic hot gas condensate evaporator

CABINET ARCHITECTURE

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing door

Magnetic snap-in door gasket

Cylinder lock in door

66 1/2" high door opening (66 1/4"H rack capacity*)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts evenly distribute air to all pan levels

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

* Rack not supplied

IMPORTANT NOTE: Cabinet upper side panels and refrigeration "plug" system can be easily removed and reinstalled at installation site where space limitations are confining.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	32 (906 cu I)
Width, Overall (in.)	35 1/4 (895 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less door] (in.)	32 (813 mm)
Depth [door open 90°] (in.)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Doors	1
Rack Capacity**	1
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2560
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	6.5 (5.1)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	43 (1092 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	94 (2661 cu I)
Weight Std - Crated (lbs.)	415 (188 kg)
Weight SS - Crated (lbs.)	505 (229 kg)
Weight Std - Uncrated (lbs.)	330 (150 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient

Weight SS - Uncrated (lbs.)

^{**} Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

405 (184 kg)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2016. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

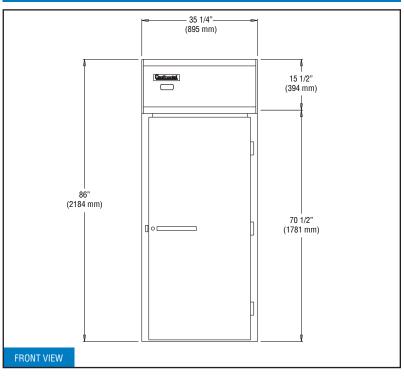

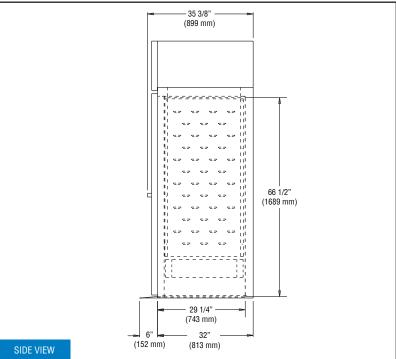

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.