


BOTTLE COOLER (32°F)

Model: CBC95-DC

95" Deep Chill Bottle Cooler

Textured baked black enamel finish exterior with all stainless steel countertop and slide lids, heavy-duty galvanized interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.

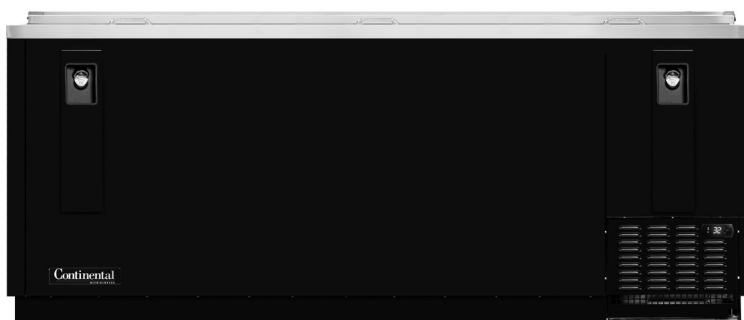

Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel exterior (-SS models) | Expansion valve system |
| Stainless steel interior | Automatic, electric condensate evaporator |
| Add'l wire bin dividers | Casters |
| Lid locks | Adjustable legs |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

- Environmentally-safe R-134a refrigerant
- Performance-rated refrigeration system
- Full length, extra large coil
- Easily accessible and serviceable slide-out condensing unit

CABINET ARCHITECTURE

- High density, non-CFC polyurethane foamed-in-place insulation
- Heavy-duty, epoxy-coated, adjustable steel wire storage bin dividers
- Front, rear and side venting louvers

MODEL FEATURES

- Automatic time defrosting period is timer initiated and temperature terminated w/automatic, energy-saving, non-electric condensate evaporator
- (2) Heavy-duty cap openers w/extra capacity, removable cap catcher
- Easily accessible, front-mounted cleanout drainage hose
- Electronic controller w/digital display

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|---|-----------------|
| Net Capacity (cu. ft.) | 32 (906 cu l) |
| 12 oz. Bottle Capacity (# cases) | 40 |
| 12 oz. Can Capacity (# cases) | 59 |
| Width, Overall (in.) | 95 (2413 mm) |
| Depth, Overall (in.) (incl. bumpers & cap catcher) | 29 1/8 (740 mm) |
| Height, Overall (in.) | 33 1/2 (851 mm) |
| No. of Slide Lids | 3 |
| No. of Bin Dividers | 8 |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/2 |
| Capacity (BTU/Hr)* | 3100 |

ELECTRICAL DATA

| | |
|-------------------------------------|---------------------|
| Voltage (int'l) | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 10.7 (7.5) |
| Defrost Amps (int'l) | 6.1 (3.2) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| | |
|-----------------------|-------------------|
| Weight - (lbs.) | 435 (197 kg) |
| Height - Crated (in.) | 39 (991 mm) |
| Width - Crated (in.) | 102 3/4 (2610 mm) |
| Depth - Crated (in.) | 30 1/4 (768 mm) |

* Rating @ +20°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.




Intertek




MADE IN THE U.S.A.

© Copyright 2017. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

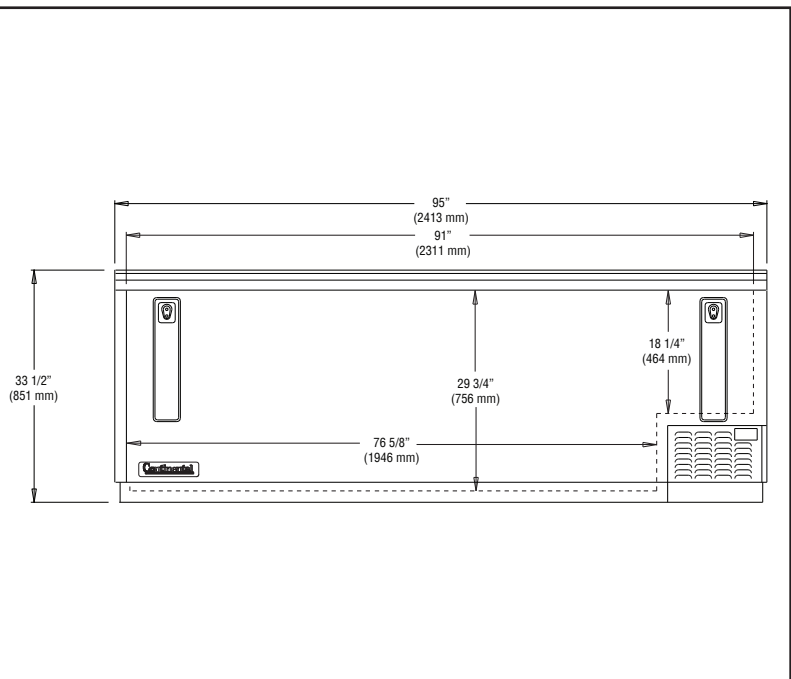

FRONT VIEW

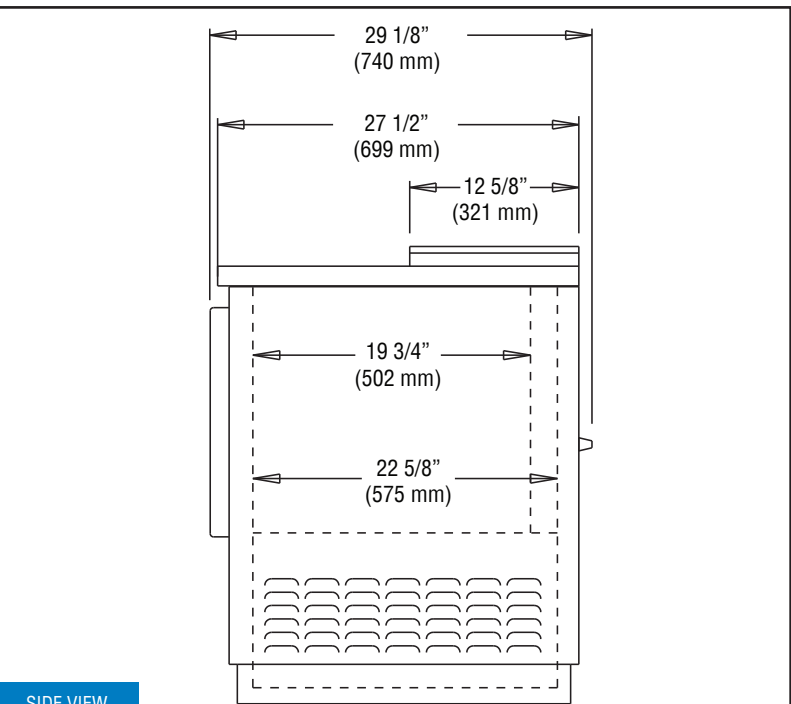

SIDE VIEW

IMPORTANT NOTE: A minimum clearance of 3" is required on each side, front and rear of cabinet for optimum performance.