

# PASS-THRU FREEZER

## Product Specifications

### 3F-PT - Three Section Freezer, Pass-Thru with Solid Doors

Self-Contained

Stainless steel front, aluminum end panels and interior.



#### OPTIONS AND ACCESSORIES

- |   |  |
|---|--|
| • Stainless steel case back                     | • Expansion valve system                                     |
| • Pan slide assemblies                          | • Adjustable Legs  |
| • Increased refrigeration systems               | • Half doors   |
| • Stainless steel shelves                       | • Remote models  |
| • Digital thermometer                           | • Hinged glass doors   |
| • Rehinging of doors ( <i>consult factory</i> ) | • Special electrical requirements ( <i>consult factory</i> ) |

*Consult factory for other model configurations, options and accessories.*

#### DIMENSIONAL DATA

Net Capacity (cu. ft.)	70 (1982 cu l)
Width, Overall (in.)	78 (1981 mm)
Depth, Overall (incl. handles) (in.)	38 <sup>3</sup> / <sub>4</sub> (984 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	79 (2007 mm)
Clear Door Width (in.)	19 <sup>5</sup> / <sub>8</sub> (492 mm)
Clear Door Height. (in.)	58 <sup>5</sup> / <sub>8</sub> (1489 mm)
Height, Overall (incl. 5" casters) (in.)	82 <sup>1</sup> / <sub>4</sub> (2089 mm)
No. of Doors	6
No. of Shelves	9
Shelf Area (sq. ft.)	61.2 (5.7 sq m)
Tray Slide Capacity (per section)	16 ea.

#### REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
Capacity (BTU/Hr)*	4325

#### ELECTRICAL DATA

Cabinet	115/208-230/60/1
Feed Wires (incl. ground)	4
Condensing Unit	208-230/60/1
Total Amps	14.3
Cabinet Amps	3.9
Defrost Amps	9.6
Power Cord Supplied	No

#### SHIPPING DATA

Height - Crated (in.)	85 <sup>1</sup> / <sub>2</sub> (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - crated (cu. ft.)	187 (5295 cu l)
Weight Standard - Crated (lbs.)	885 (401 kg)
Weight SS - Crated (lbs.)	1000 (454 kg)
Weight Standard - Uncrated (lbs.)	675 (306 kg)
Weight SS - Uncrated (lbs.)	790 (358 kg)

\* Rating @ -15°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents.

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

APPROVAL:

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

## Standard Design Features

### REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated flow line handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gasket

Cylinder lock in each door

5" casters

Heavy-duty epoxy-coated steel shelves

### MODEL FEATURES

Automatic interior lighting

External dial thermometer

Automatic, energy-saving, non-electric condensate evaporator

Automatic electric defrost

Energy saving switch for door heaters

### STANDARD

Stainless steel front, aluminum end panels and interior

### SUFFIX SA

Stainless steel exterior, aluminum interior


### SUFFIX SS

Stainless steel exterior and interior


# PASS-THRU FREEZER

## 3F-PT - Three Section Freezer, Pass-Thru with Solid Doors

Self-Contained

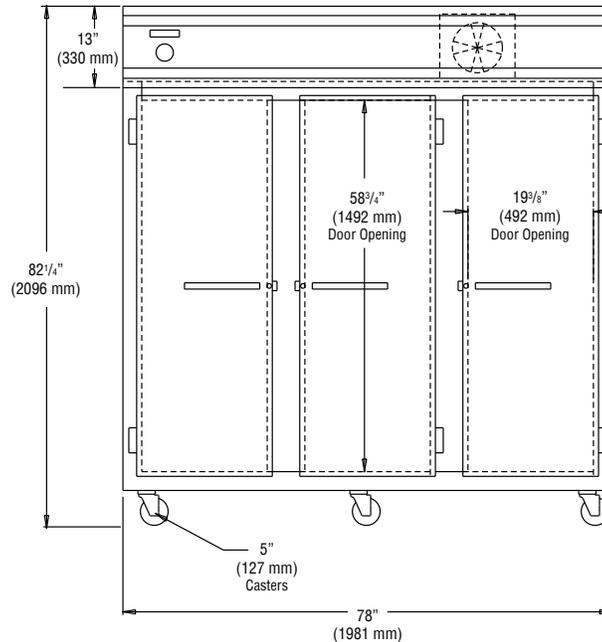

FRONT VIEW

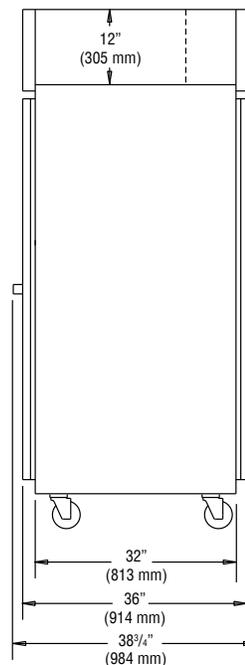

SIDE VIEW



This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2012, Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

# Continental

Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

3F-PT (9/12/12)