# WORKTOP REFRIGERATOR

Model: SW27-BS-D

27" Worktop Refrigerator with Drawers and 5 1/2" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Expansion valve system
Stainless steel back	Glass door (-GD model)
Overshelves (single or double)	Adjustable legs
Automatic electric condensate evaporator	Drawers locks
Door in lieu of drawers	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	

## **Standard Model Features**

SIS #:

## REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Automatic, energy-saving, non-electric
condensate evaporator

Non-corrosive, plasticized fin evaporator coil Easily serviceable back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation
Stainless steel roll-out drawers
Magnetic snap-in drawer gaskets
Completely enclosed, vented and removable case back
5" casters

#### **MODEL FEATURES**

Electronic controller w/ digital display & hi-low alarm



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	7.4 (210 cu I)
Width, Overall (in.)	27 1/2 (699 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 9/16 (802 mm)
Depth, Body Only (in.) (less drawers)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	40 3/4 (1035 mm)
No. of Drawers (two tier)	2
No. of Drawers (three tier)	3
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Total Amps (int'l)	6.3 (3.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	

# **DRAWER PAN CONFIGURATIONS**

Weight (lbs.)

whole unit.

Height - Crated (in.)

Width - Crated (in.)

Depth - Crated (in.)

Two Tier: (1) 12 x 20 x 6 pan per drawer

Three Tier: (1) 12 x 20 x 4 pan per drawer

\* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

170 (77 kg)

48 3/4 (1238 mm)

35 1/2 (902 mm)

37 1/4 (946 mm)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

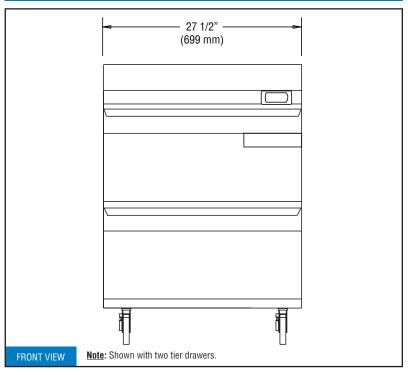

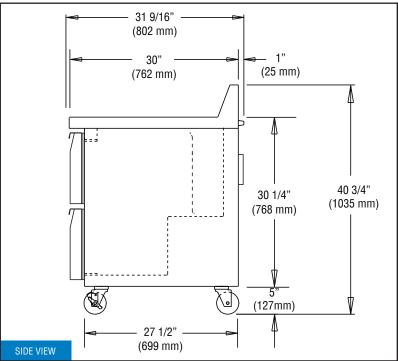

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required</u> on sides, front and rear.