UNDERCOUNTER REFRIGERATOR

Model: SW27-U-D

27" Undercounter Refrigerator with Drawers

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Automatic electric condensate evaporator
Stainless steel back	Expansion valve system
Solid door in lieu of drawers	Drawer locks
Glass door in lieu of drawers	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Automatic, energy-saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Stainless steel roll-out drawers
Magnetic snap-in drawer gaskets
Completely enclosed, vented and removable case back
1 3/8" diameter plate casters (factory installed)

MODEL FEATURES

Electronic controller w/ digital display & hi-low alarm 2" high, bottom mounted front breather air divider



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA

Net Capacity (cu. ft.)	7.4 (210 cu I)
Width, Overall (in.)	27 1/2 (699 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 9/16 (802 mm)
Height, Overall (in.) (incl. 1 3/8" plate casters)	31 13/16 (808 mm)
No. of Drawers (two tier)	2
No. of Drawers (three tier)	3

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (n/a)
Fans	1
Total Amps (int'l)	6.3 (3.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	165 (75 kg)
Height - Crated (in.)	40 (1016 mm)
Width - Crated (in.)	35 1/2 (902 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer

Three Tier: (1) 12 x 20 x 4 pan per drawer

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.








© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

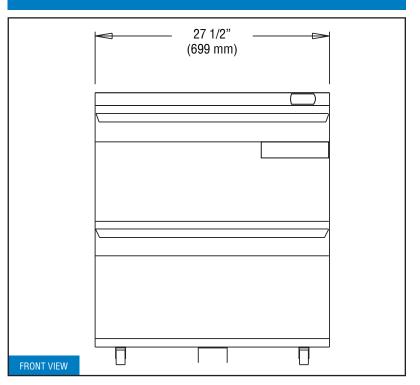

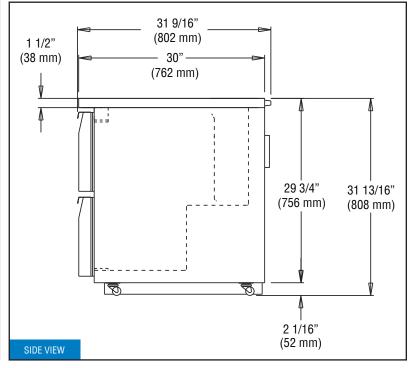

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.