

DISPLAY FREEZER (0°F)

Model: 2FE-GD

2-Section Extra-Wide Display Reach-In Freezer with Hinged Glass Doors

2FE-GD - Stainless steel front, aluminum end panels and interior
2FE-SA-GD - Stainless steel exterior, aluminum interior
2FE-SS-GD - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pan slide assemblies
Add'l epoxy-coated steel shelves	Half glass doors
Chrome or stainless steel shelves	Pass-thru (consult factory)
Heavy-duty pilaster strips	Solid door (full or half doors)
Rehinging of doors (consult factory)	Special electrical req. (consult factory)
Adjustable legs	

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant
Self contained, performance-rated refrigeration system
Automatic, electric condensate evaporator
Thermal expansion valve

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Chrome-plated handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap-in door gaskets
Cylinder lock in each door
Heavy-duty, epoxy-coated steel shelves
Triple-pane, tempered hinged glass doors
5" casters

MODEL FEATURES

LED interior lighting
Electronic controller w/digital display & hi-low alarm
Automatic electric defrost

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	50 (1416 cu l)
Width, Overall (in.)	57 (1448 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	58 (1473 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 5" casters)	85 3/4 (2178 mm)
No. of Doors	2
No. of Shelves	8
Shelf Area (sq. ft.)	40.8 (3.8 sq m)
Tray Slide Capacity (per section)	24

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
Capacity (BTU/Hr)*	4325

ELECTRICAL DATA



Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	14.0 (11.6)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug [attached] (int'l)	No (No)

SHIPPING DATA (CRATED)

Height (in.)	89 (2261 mm)
Width (in.)	64 (1626 mm)
Depth (in.)	42 (1067 mm)
Volume (cu. ft.)	133 (3766 cu l)
Weight Std (lbs.)	610 (277 kg)
Weight -SS (lbs.)	640 (290 kg)

Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

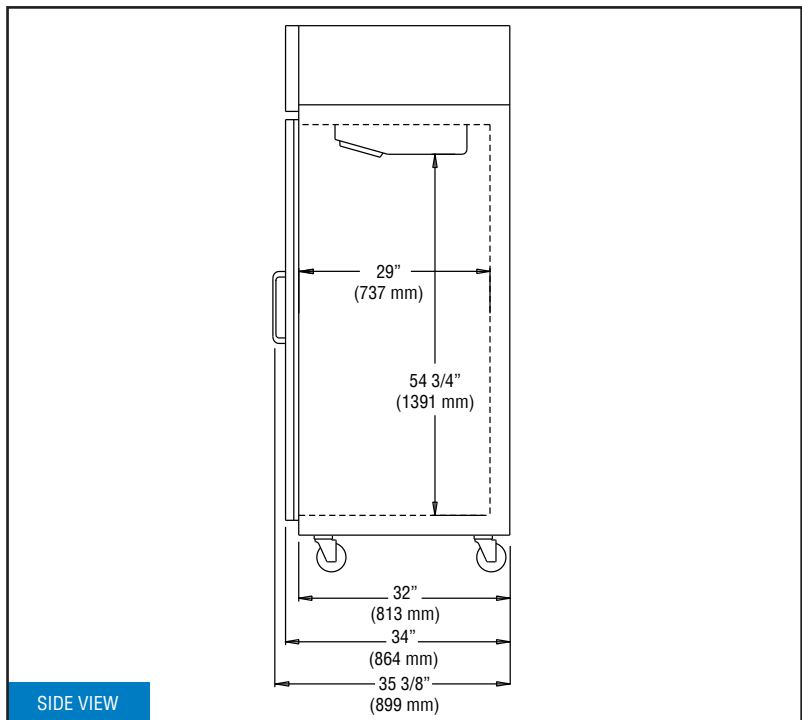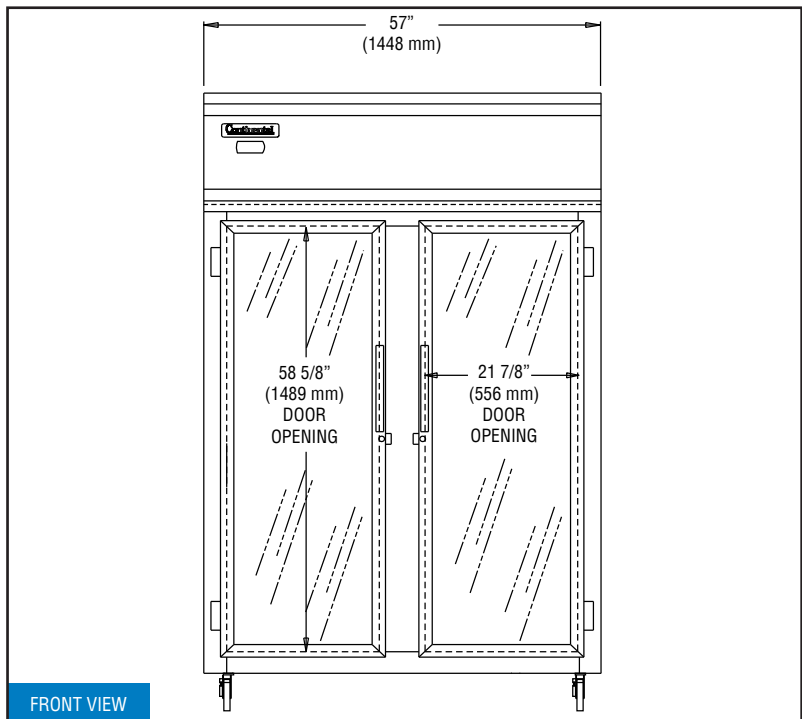

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2018. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.