WORKTOP FREEZER (0°F)

Model: SWF60-D

60" Worktop Freezer with Drawers

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Backsplash (-BS model)
Stainless steel back	Adjustable legs
Overshelves (single or double)	Drawers locks
Automatic electric condensate evaporator	Special electrical requirements (consult factory)
Doors in lieu of drawers	

Consult factory for other model configurations, options and accessories.

Project Name:	
Madal Onasitiada	
Model Specified:	
Location:	
Item No:	Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system

Environmentally-safe R-290 refrigerant

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Stainless steel roll-out drawers
Magnetic snap-in drawer gaskets
Completely enclosed, vented and removable case back
5" casters

MODEL FEATURES

Electronic controller w/ digital display & hi-low alarm
Automatic electric defrost



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cu. ft.)

Width, Overall (in.)	60 (1524 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 9/16 (802 mm)
Height, Overall (in.) (incl. 5" casters)	35 1/4 (895 mm)
No. of Drawers (two tier)	4
No. of Drawers (three tier)	6

17.0 (481 cu l)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2	
Capacity (BTU/Hr)*	2078	

FLECTRICAL DATA

ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Total Amps (int'l)	7.8 (3.6)
Defrost Amps (int'l)	4.4 (2.2)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	284 (129 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	68 (1727 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer

Three Tier: (1) 12 x 20 x 4 pan per drawer

* Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

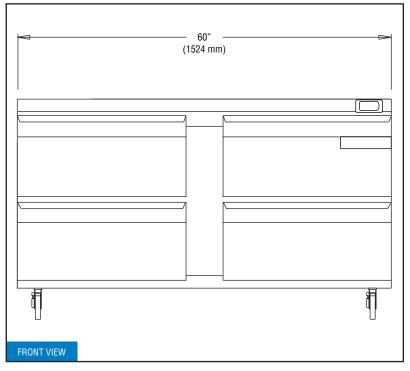

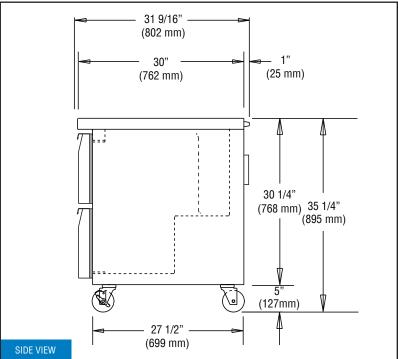

IMPORTANT NOTE: If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.