
BACK BAR EQUIPMENT

Model: KC90S-SS

90" Keg Cooler - Shallow Depth

Stainless steel exterior and countertop, heavy-duty galvanized interior with reinforced stainless steel floor.

Designed to maintain NSF-7 temperatures in 100°F ambient.

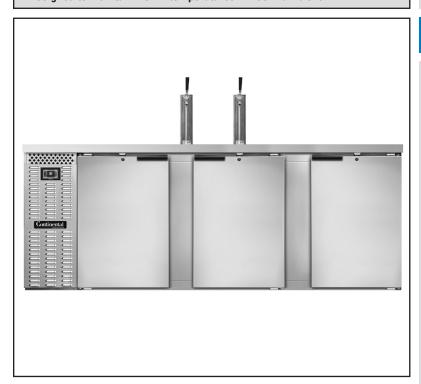

Options and Accessories

(upcharge and lead times may apply)

Casters or legs	Riser base (field installed)
Textured baked black enamel finish exterior	Condensing unit on right
Stainless steel interior	Wine rack
Glass doors in lieu of solid doors	Single or triple angle faucets
Epoxy-coated shelves with clips	Faucet lock
Stainless steel shelves with clips	Standard depth
Automatic, electric condensate evaporator	

^{*} Adding a Riser Base increases overall height 2"

Project Name: Model Specified: Location: Item No: Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA#:

Performance-rated **front breathing** refrigeration system

Environmentally-safe R-134a refrigerant

Automatic, energy-saving, non-electric condensate evaporator

Extra large, balanced evaporator coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Continuously cooled, 3" diameter beer column with lever faucets, ${\rm CO_2}$ pressure relief distributor and ${\rm CO_2}$ tubing with clamps

Easily removable stainless steel drip grate with front-mounted cleanout drainage hose

Magnetic snap-in gasket (each door)

Cylinder-keyed security lock (each door)

Stainless steel reinforced threshold

MODEL FEATURES

Low profile cabinet design

Electronic controller w/ digital display & hi-low alarm

Easily accessible and serviceable slide-out condensing unit

Front, rear and side venting louvered grills



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

DIMENSIONAL DATA

Net Capacity (cu. ft.)	25 (708 cu I)
Width, Overall (in.)	90 (2286 mm)
Depth, Overall (in.) (incl. handles & bumpers)	25 3/16 (640 mm)
Depth, Body Only (in.) (less doors)	21 (533 mm)
Height, Overall (in.) (not incl. columns)	34 3/4 (883 mm)
Barrel Capacity (# barrel type kegs)	4
Straight Wall Capacity (# straight wall kegs)	4
No. of Doors	3
No. of Beer Columns	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	2670

ELECTRICAL DATA


Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	5.33 (4.2)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)


SHIPPING DATA

Weight (lbs.)	555 (252 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	109 (2769 mm)
Depth - Crated (in.)	42 (1067 mm)

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

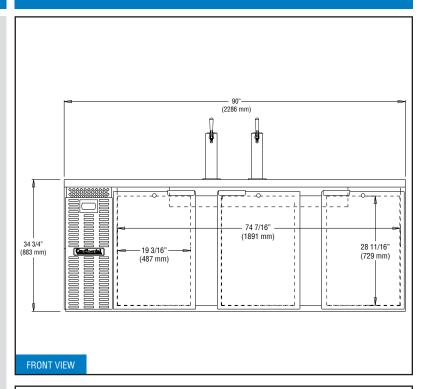

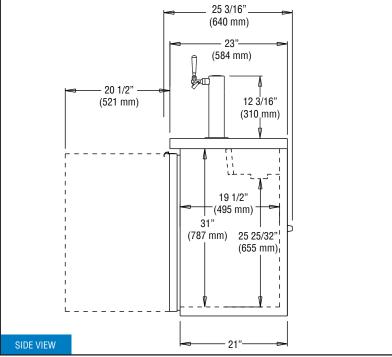

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. A clearance of 1" on the back and 3" on the sides is recommended.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.