# WORKTOP FREEZER (0°F)

Model: SWF27-D

# 27" Worktop Freezer with Drawers

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



#### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Backsplash (-BS model)	
Stainless steel back	Adjustable legs	
Overshelves (single or double)	Drawer locks	
Door in lieu of drawers	Special electrical requirements (consult factory)	
Glass door (-GD model)		

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
·		
Location:		
Item No:	Quantity:	

## **Standard Model Features**

SIS #:

#### REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system
Environmentally-safe R-290 refrigerant
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation
Stainless steel roll-out drawers
Magnetic snap-in drawer gaskets
Completely enclosed, vented and removable case back
5" casters

### **MODEL FEATURES**

Electronic controller w/ digital display & hi-low alarm Automatic electric defrost



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	7.4 (210 cu l)
Width, Overall (in.)	27 1/2 (699 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 9/16 (802 mm)
Height, Overall (in.) (incl. 5" casters)	35 1/4 (895 mm)
No. of Drawers (two tier)	2
No. of Drawers (three tier)	3
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1572
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	1
Total Amps (int'l)	4.0 (2.8)
Defrost Amps (int'l)	4.8 (2.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	165 (75 kg)

# **DRAWER PAN CONFIGURATIONS**

Height - Crated (in.)

Width - Crated (in.)

Depth - Crated (in.)

Two Tier: (1)  $12 \times 20 \times 6$  pan per drawer

Three Tier: (1) 12 x 20 x 4 pan per drawer

\* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

43 1/4 (1099 mm)

35 1/2 (902 mm)

37 1/4 (946 mm)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

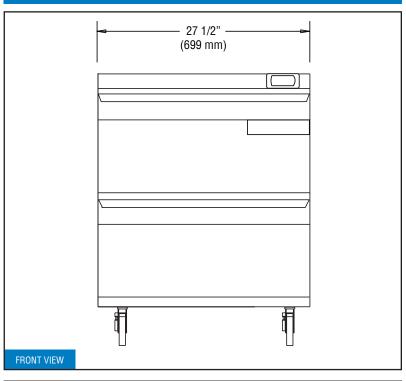

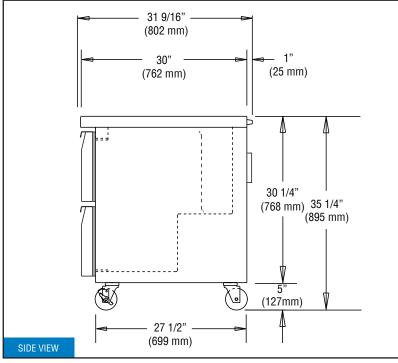

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>