

# WORKTOP FREEZER (0°F)

**Model: SWF27-FB**

## 27" Worktop Freezer with Solid Door Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.

**Designed to maintain NSF-7 temperatures in 100°F ambient.**



### Options and Accessories

(upcharge and lead times may apply)

|                                  |  |
|----------------------------------|--|
| Stainless steel interior         | Drawers in lieu of door (-D model)                   |
| Stainless steel back             | Glass door in lieu of solid door (-GD model)         |
| Overshelves (single or double)   | Backsplash (-BS model)                               |
| Add'l epoxy-coated steel shelves | Door lock  |
| Stainless steel shelves          | Special electrical requirements<br>(consult factory) |

Consult factory for other model configurations, options and accessories.

**Project Name:**

**Model Specified:**

**Location:**

**Item No:**

**Quantity:**

**AIA #:**

**SIS #:**

### Standard Model Features

#### REFRIGERATION SYSTEM

Performance-rated refrigeration system  
Environmentally-safe R-290 refrigerant  
Automatic, hot gas condensate evaporator  
Non-corrosive, plasticized fin evaporator coil  
Easily serviceable, back mounted compressor

#### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation  
Spring loaded, self closing door  
Magnetic snap-in door gasket  
Heavy-duty, epoxy-coated steel shelf  
Completely enclosed, vented and removable case back  
3 3/4" casters

#### MODEL FEATURES

Electronic controller w/ digital display & hi-low alarm  
Field rehingable door  
Automatic electric defrost

*Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.*

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

**APPROVAL:**

## Model Specifications

### DIMENSIONAL DATA

|  |                  |
|--|------------------|
| Net Capacity (cu. ft.)                           | 7.4 (210 cu l)   |
| Width, Overall (in.)                             | 27 1/2 (699 mm)  |
| Depth, Overall (in.)<br>(incl. handle & bumpers) | 31 9/16 (802 mm) |
| Height, Overall (in.) (incl. 3 3/4" casters)     | 34 (864 mm)      |
| Shelf Area (sq. ft.)                             | 3.5 (.3 sq m)    |
| No. of Shelves                                   | 1                |
| No. of Doors                                     | 1                |
| Interior Depth (in.)                             | See Drawing      |
| Interior Height (in.)                            | 26 1/4 (667 mm)  |
| Interior Width (in.)                             | 24 1/2 (622 mm)  |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4  |
| Capacity (BTU/Hr)*          | 1572 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Fans                                | 1                   |
| Total Amps (int'l)                  | 4.0 (2.8)           |
| Defrost Amps (int'l)                | 4.8 (2.4)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA

|                       |                 |
|-----------------------|-----------------|
| Weight (lbs.)         | 165 (75 kg)     |
| Height - Crated (in.) | 42 (1067 mm)    |
| Width - Crated (in.)  | 35 1/2 (902 mm) |
| Depth - Crated (in.)  | 37 1/4 (946 mm) |



\* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

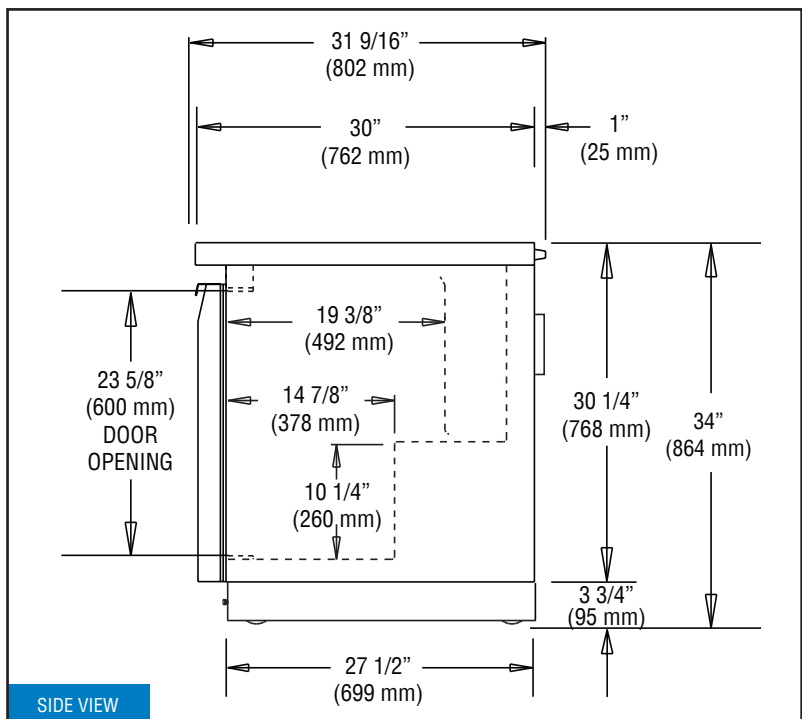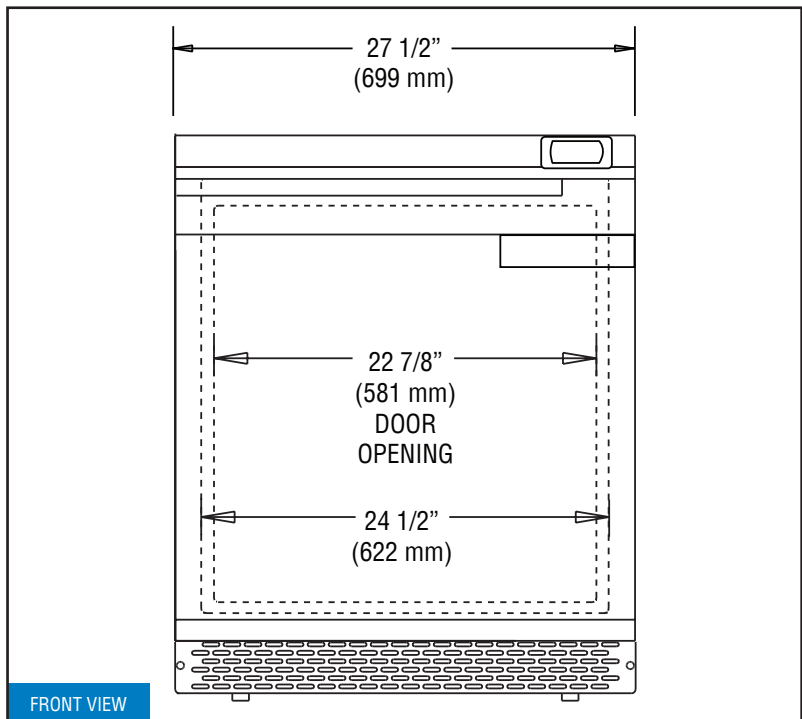

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2018. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

SWF27-FB (5/8/18)