WORKTOP REFRIGERATOR

Model: SW48-BS

48" Worktop Refrigerator with Solid Doors and 5 1/2" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.




Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Drawers in lieu of doors (-D model)	
Stainless steel back	Glass doors (-GD model)	
Overshelves (single or double)	Expansion valve system	
Add'l epoxy-coated steel shelves	Adjustable legs	
Stainless steel shelves	Door locks	
Automatic electric condensate evaporator	Special electrical requirements (consult factory)	

Consult factory for other model configurations, options and accessories.



Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

 $2" \ non\mbox{-CFC polyurethane foam insulation}$

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Electronic controller w/ digital display & hi-low alarm Field rehingeable doors



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

Net Capacity (cu. ft.) 13.4 (379 cu l) Width, Overall (in.) 48 (1219 mm) Depth, Overall (in.) 31 9/16 (802 mm) (incl. handles & bumpers) 27 1/2 (699 mm) Depth, Body Only (in.) (less doors) 27 1/2 (699 mm) Height, Overall (in.) (incl. 5" casters) 40 3/4 (1035 mm) Shelf Area (sq. ft.) 6.8 (.6 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg) Height - Crated (in.) 48 3/4 (1238 mm)	DIMENSIONAL DATA	
Depth, Overall (in.) (incl. handles & bumpers) 31 9/16 (802 mm) Depth, Body Only (in.) (less doors) 27 1/2 (699 mm) Height, Overall (in.) (incl. 5" casters) 40 3/4 (1035 mm) Shelf Area (sq. ft.) 6.8 (.6 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'I) 115/60/1 (220/50/1) Fans 3 Total Amps (int'I) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'I) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Net Capacity (cu. ft.)	13.4 (379 cu I)
(incl. handles & bumpers) Depth, Body Only (in.) (less doors) Height, Overall (in.) (incl. 5" casters) Shelf Area (sq. ft.) No. of Shelves No. of Doors Interior Depth (in.) Interior Width (in.) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Fans Total Amps (int'l) Set Drawing 1/5 1/5 1/5 1/5 1/5 1/5 1/5 1/	Width, Overall (in.)	48 (1219 mm)
Height, Overall (in.) (incl. 5" casters) 40 3/4 (1035 mm) Shelf Area (sq. ft.) 6.8 (.6 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)		31 9/16 (802 mm)
Shelf Area (sq. ft.) 6.8 (.6 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'I) 115/60/1 (220/50/1) Fans 3 Total Amps (int'I) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'I) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Depth, Body Only (in.) (less doors)	27 1/2 (699 mm)
No. of Shelves 2 No. of Doors 2 Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Height, Overall (in.) (incl. 5" casters)	40 3/4 (1035 mm)
No. of Doors 2 Interior Depth (in.) See Drawing Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Shelf Area (sq. ft.)	6.8 (.6 sq m)
Interior Depth (in.) Interior Height (in.) Interior Width (in.) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'I) Fans Total Amps (int'I) See Drawing 44 (1118 mm) 1/5 1/5 1/5 1/5 1/5 1/5 1/5 1/	No. of Shelves	2
Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	No. of Doors	2
Interior Width (in.) 44 (1118 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Interior Depth (in.)	See Drawing
REFRIGERANT DATA Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'I) 115/60/1 (220/50/1) Fans 3 Total Amps (int'I) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'I) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Interior Height (in.)	26 1/4 (667 mm)
Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'I) 115/60/1 (220/50/1) Fans 3 Total Amps (int'I) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'I) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Interior Width (in.)	44 (1118 mm)
Capacity (BTU/Hr)* 1620 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	REFRIGERANT DATA	
ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Condensing Unit Size (H.P.)	1/5
Voltage (int'l) 115/60/1 (220/50/1) Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Capacity (BTU/Hr)*	1620
Fans 3 Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	ELECTRICAL DATA	
Total Amps (int'l) 7.3 (3.6) 10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Voltage (int'l)	115/60/1 (220/50/1)
10 ft. Cord/Plug [attached] (int'l) Yes (No) SHIPPING DATA Weight (lbs.) 258 (117 kg)	Fans	3
SHIPPING DATA Weight (lbs.) 258 (117 kg)	Total Amps (int'l)	7.3 (3.6)
Weight (lbs.) 258 (117 kg)	10 ft. Cord/Plug [attached] (int'l)	Yes (No)
	SHIPPING DATA	
Height - Crated (in) 48 3/4 (1938 mm)	Weight (lbs.)	258 (117 kg)
1161giil - Oralea (iii.) 40 3/4 (1230 iiiiii)	Height - Crated (in.)	48 3/4 (1238 mm)

^{*} Rating @ +25°F evaporator, 90°F ambient

Width - Crated (in.)

Depth - Crated (in.)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

56 (1422 mm)

37 1/4 (946 mm)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

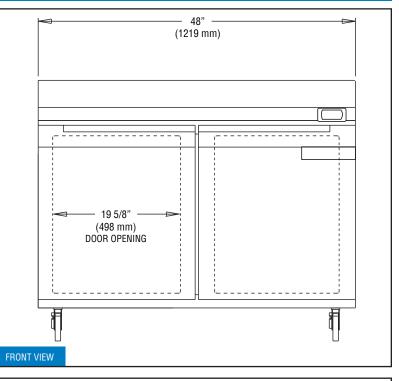

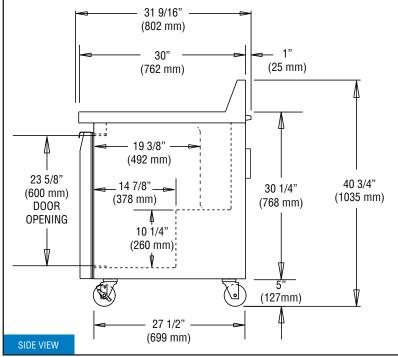

IMPORTANT NOTE: If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.