# WORKTOP REFRIGERATOR

Model: SW27-FB

# 27" Worktop Refrigerator with Solid Door - Front Breathing

Stainless steel front, top, and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.




#### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Drawers in lieu of door (-D model)
Stainless steel back	Backsplash (-BS model)
Overshelves (single or double)	Glass door (-GD model)
Add'l epoxy-coated steel shelves	Expansion valve system
Stainless steel shelves	Door lock
Automatic electric condensate evaporator	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.



#### **Standard Model Features**

#### REFRIGERATION SYSTEM

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant

Automatic, energy saving, non-electric condensate evaporator

 $\label{lem:non-corrosive} \mbox{Non-corrosive, plasticized fin evaporator coil}$ 

Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Spring loaded, self closing door

Magnetic snap-in door gasket

Heavy-duty, epoxy-coated steel shelf

Completely enclosed, vented and removable case back

3 3/4" casters

#### **MODEL FEATURES**

Electronic controller w/ digital display & hi-low alarm

Field rehingeable door

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

### **Model Specifications**

7.4 (210 cu I)
27 1/2 (699 mm)
31 9/16 (802 mm)
27 1/2 (699 mm)
34 (864 mm)
3.5 (.3 sq m)
1
1
See Drawing
26 1/4 (667 mm)
24 1/2 (622 mm)

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620

#### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Total Amps (int'l)	6.3 (3.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Weight (lbs.)	165 (75 kg)
Height - Crated (in.)	42 (1067 mm)
Width - Crated (in.)	35 1/2 (902 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









## © Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

#### **Model Plan Views**

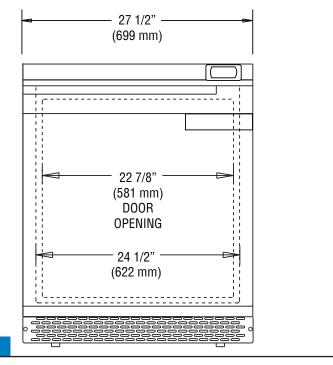

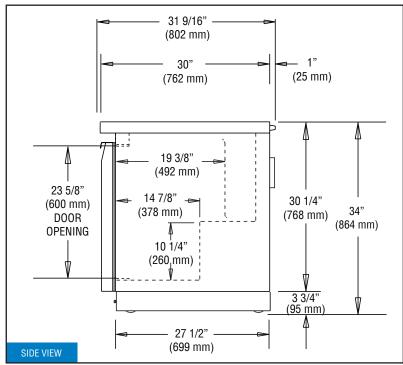

FRONT VIEW