# BOTTLE COOLER (38°F - 41°F)

Model: CBC24-SS

24" Bottle Cooler

Stainless steel exterior with all stainless steel countertop and slide lid, heavy-duty galvanized interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



## **Options and Accessories**

(upcharge and lead times may apply)

| Textured baked black enamel finish exterior | Expansion valve system                    |
|---|---|
| Stainless steel interior                    | Automatic, electric condensate evaporator |
| Add'l wire bin dividers                     | Casters                                   |
| Lid locks                                   | Adjustable legs                           |
| Deep Chill (32°F)                           |   |

Consult factory for other model configurations, options and accessories

Project Name:

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

## **Standard Model Features**

### REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Performance-rated front breathing refrigeration system

Automatic, energy-saving, non electric condensate evaporator

Full length, extra large coil

Easily accessible and serviceable slide-out condensing unit

#### **CABINET ARCHITECTURE**

High density, non-CFC polyurethane foamed-in-place insulation

Heavy-duty, epoxy-coated, adjustable steel wire storage bin dividers

# **MODEL FEATURES**

Heavy-duty cap opener w/extra capacity, removable cap catcher

Easily accessible, front-mounted cleanout drainage hose

Electronic controller w/digital display



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

# **Model Specifications**

| DIMENSIONAL DATA                                      |                     |
|---|---------------------|
| Net Capacity (cu. ft.)                                | 4.8 (136 cu I)      |
| 12 oz. Bottle Capacity (# cases)                      | 4 1/2               |
| 12 oz. Can Capacity (# cases)                         | 7 1/2               |
| Width, Overall (in.)                                  | 24 (610 mm)         |
| Depth, Overall (in.)<br>(incl. bumpers & cap catcher) | 29 1/8 (740 mm)     |
| Height, Overall (in.)                                 | 34 3/4 (883 mm)     |
| No. of Slide Lids                                     | 1                   |
| No. of Bin Dividers                                   | 2                   |
| REFRIGERANT DATA                                      |                     |
| Condensing Unit Size (H.P.)                           | 1/5                 |
| Capacity (BTU/Hr)*                                    | 1800                |
| ELECTRICAL DATA                                       |                     |
| Voltage (int'l)                                       | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground)                             | 3                   |
| Total Amps (int'l)                                    | 4.7 (2.9)           |
| 10 ft. Cord/Plug [attached] (int'l)                   | Yes (No)            |
| SHIPPING DATA   |                     |
| Weight - (lbs.)                                       | 225 (102 kg)        |

Height - Crated (in.)

Width - Crated (in.)

Depth - Crated (in.)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

40 1/4 (1022 mm)

30 1/4 (768 mm)

33 (838 mm)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2017. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

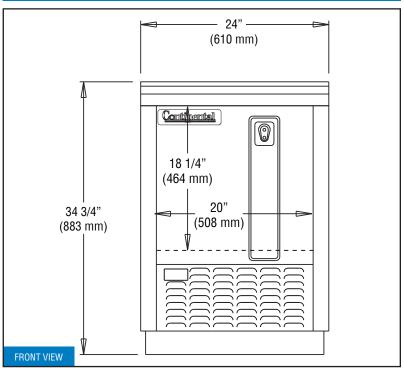

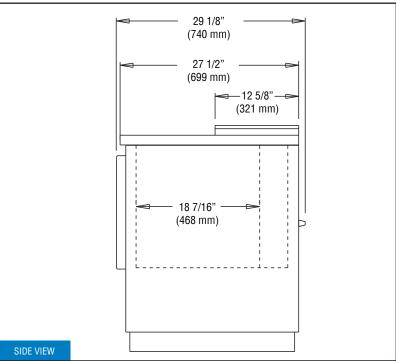

**IMPORTANT NOTE:** Model is completely front breathing and takes in and exhausts air through the front grill. A clearance of 1" on the back and 3" on the sides is recommended.

<sup>\*</sup> Rating @ +20°F evaporator, 90°F ambient