




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

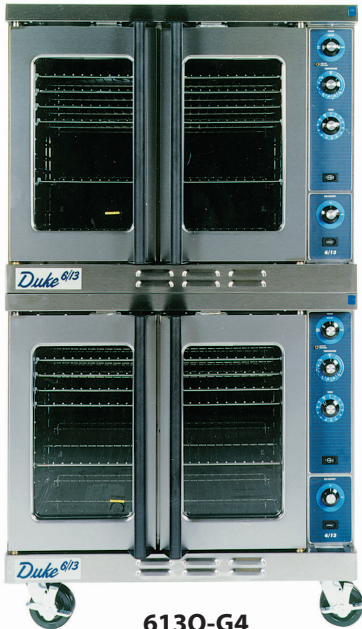

613Q-G4

(Shown with optional casters)

OPTIONS:

- ☐ Stainless steel interior
- ☐ Stainless steel back enclosure panel
- ☐ Seismic feet
- ☐ 48" flexible disconnect, w/restraining device
- ☐ Down draft hood
- ☐ Common gas manifold
- ☐ Double stack - shipped assembled
- ☐ Flue deflector
- ☐ Casters
- ☐ Porcelain drip tray
- ☐ Extra deep oven racks
- ☐ Prison package - tamper proof screws, lexan hinged cover with lockable clasp
- ☐ Extended warranty

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1081 613Q-G4 Double-Deep-Gas

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Duke Convection Ovens - "Q" Series Double Deck - Deep Depth - Gas

- **613Q-G4** Double deck, deep depth

STANDARD FEATURES

- 6 racks/13 rack positions
- Porcelain interior finish
- 50/50 independent stainless steel doors
- Double pane glass both doors
- 8" angular stainless steel legs/adjustable feet
- 2 Speed motor

OVEN SECTION

- Stainless steel front, sides and top
- 1 1/2" insulation on bottom, sides and back
- 3" insulation on top
- Interior lights

BURNER SYSTEM

- 46,000 BTU on each oven
- High output atmospheric burner system
- Main gas shut off valve
- Built-in gas regulator

OVEN CONTROLS

- ☐ "V" - Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- ☐ "XX" - Solid state digital time and temperature controls, 12-hour countdown timer, **Cook and Hold** feature, 2-speed fan, Pulse fan capability

Certifications



DUKE CONVECTION OVENS - "Q" SERIES - DOUBLE - DEEP DEPTH - GAS

Catalog No. DCO-QGASDD

A.I.A. File No. 35-C-13


Specification subject to change

REV 5-17-2019


DUKE CONVECTION OVENS

"Q" SERIES

DOUBLE DECK - GAS - DEEP DEPTH

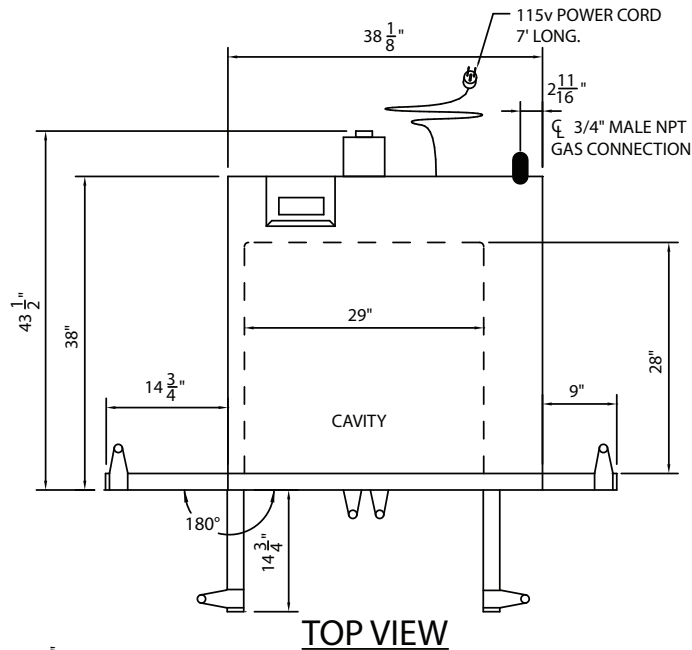

TOP VIEW

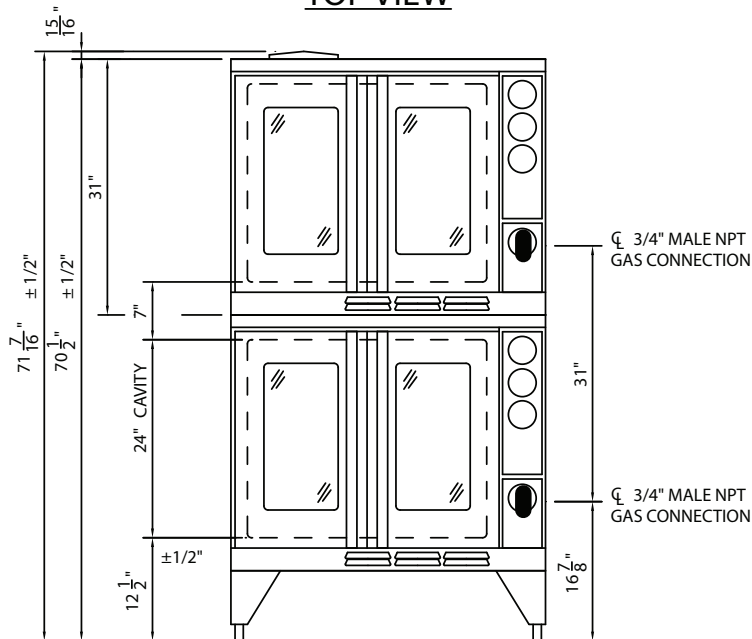


FRONT VIEW

Gas Specifications		
613Q-G4	BTU/Hour	46,000
Regulated gas pressure required 3.5"WC natural /10" WC propane		
Combustible surface clearance - 1" side, 1" rear, 6" floor		
● Gas connection		
3/4" Gas connection		
Electrical requirements: 3.5 Amps/ 115V		
Standard 115V units supplied with 5' cord and plug		

Specify gas type

Specify altitude over 2000 feet

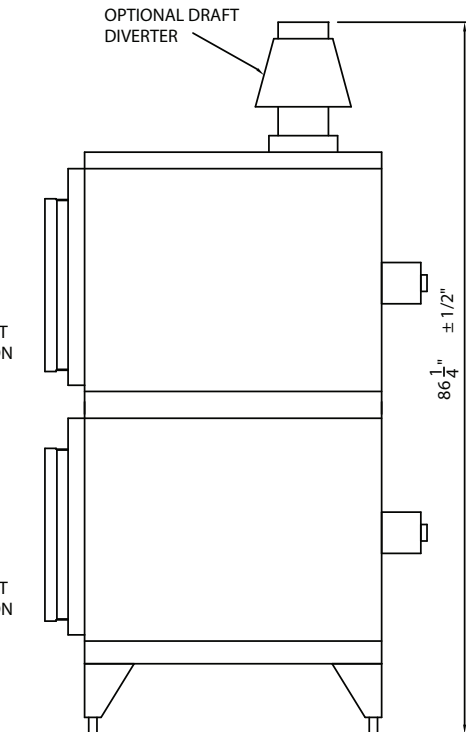

RIGHT SIDE VIEW

DIMENSIONS:

Model	Height		Width		Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm		lbs.	kg
613Q-G4	43.5	110.5	38	96.5	70.5	179.1	76.5	1080	490.0

Freight Class: 85



Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2019, Duke Manufacturing Co.