



a Standex company

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

## MARKET SERIES SELF-SERVE REFRIGERATED DELI CASE

- MODEL  SQ-3CDSS  
 SQ-4CDSS  
 SQ-5CDSS  
 SQ-6CDSS  
 SQ-8CDSS



*Market Deli. The merchandiser that provides solutions to your fresh food merchandising needs. Cases are available in lengths of 3', 4', 5', 6', and 8'.  
Designed for continuous case line-ups.*


### STANDARD FEATURES

- Four-point leveling system.
- Rear work counter.
- LED top light.
- Pedestal or panel base design.
- Stainless steel interior and exterior finish.
- Solid-state control panel with main power, light, and temperature readout.
- Condensate pump provided.
- Average case temperature of 36° to 38°F is maintained.
- Appliance receptacle provided on back for cash register, scale, or slicer.
- Coated evaporator coil.
- UL Safety & UL Sanitation Listed.
- Designed for continuous case line-ups.
- Energy-saving night curtain.

# MARKET SERIES SELF-SERVE REFRIGERATED DELI CASE

## OPTIONAL ACCESSORIES:

- Special Case Height (34" or 36")
- Front Bumper Rail (Black, White, Green, Gray)
- Display Riser or Step Pan Holder
- Remote Refrigeration
- Decorative End Panel (Black, White, Green, Gray)
- Scale Stand
- Food Container Holder
- Accent Base Light
- Slicer Stand
- Fish Case Package (Includes Ice Pan and Drain)
- Condensate Evaporator Assembly

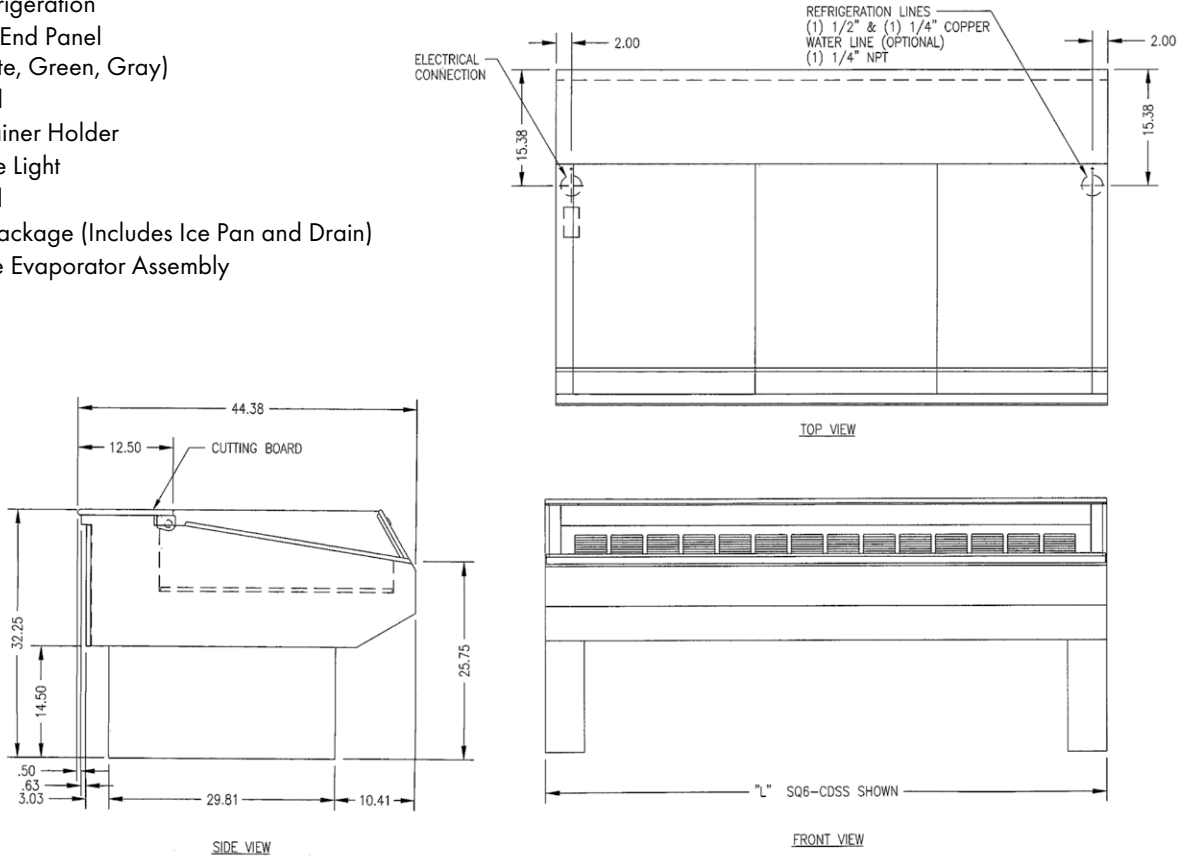

## SPECIFICATIONS:

Model	*Dimensions L W H	Approx. Shipping Weight (lbs)	Capacity Display Riser	**Self-Contained 120/60/1	**Remote 120/60/1
<input type="checkbox"/> SQ-3CDSS	36" x 44 1/8" x 32 1/4"	675	3	1/2 HP • 11.5 AMPS	6 AMPS
<input type="checkbox"/> SQ-4CDSS	48" x 44 1/8" x 32 1/4"	795	4	1/2 HP • 13.8 AMPS	7 AMPS
<input type="checkbox"/> SQ-5CDSS	60" x 44 1/8" x 32 1/4"	895	4	1/2 HP • 13.8 AMPS	7 AMPS
<input type="checkbox"/> SQ-6CDSS	72" x 44 1/8" x 32 1/4"	1,035	7	1/2 HP • 14.8 AMPS	7 AMPS
<input type="checkbox"/> SQ-8CDSS	96" x 44 1/8" x 32 1/4"	1,135	9	3/4 HP • 16.0 AMPS	8 AMPS

\* Without decorative end panel.

\*\* Plus general receptacle 120V, 15 AMP. (2nd circuit required.)

- When ordering, specify case line-up and pedestal or panel design.
- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Cases are designed to operate in an environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

