_____ PROJECT NAME:

ITEM:



HIGH VOLUME REFRIGERATED DELI CASE MODEL SGR3648CD SGR5048CD SGR5948CD SGR7748CD



Display more product and serve more customers with presentation and value in mind. Cases are available in lengths of 36", 50", 59", and 77". Designed for continuous case line-ups without middle end glass.


STANDARD FEATURES

- Adjustable full-length stainless steel lighted mezzanine shelf. Shelf is adjustable up and down and can also be tilted in three positions.
- Removable rear wrapping board.
- Tempered thermopane tilt-out front glass for easy cleaning. Front glass is sloped for high visual product displays.
- Tempered thermopane glass top, ends, and doors.
- Removable sliding rear doors, shelf light, shelf supports, and shelf.
- LED top light and shelf lights.
- Steel base construction with a choice of six standard laminates on base. Other finishes optional.
- Condenser air filter on self-contained units.
- Thermometer.
- UL Safety and UL Sanitation Listed.

- Removable, scratch-resistant, rustproof white display deck.
- Condensate evaporator provided for a totally self-contained system.
- Oversized coil and low-velocity fan system maintains high humidity and product freshness.
- Easy clean, rustproof insulated evaporator coil compartment.
- Easily accessible light switch and adjustable temperature control.
- Average case temperature of 36° to 38° is maintained.
- Rear access of the refrigeration system for quick and easy service.
- Black trim.
- Designed for continuous line-ups.
- 134A Refrigerant.

HIGH VOLUME REFRIGERATED DELI CASE

OPTIONAL ACCESSORIES:

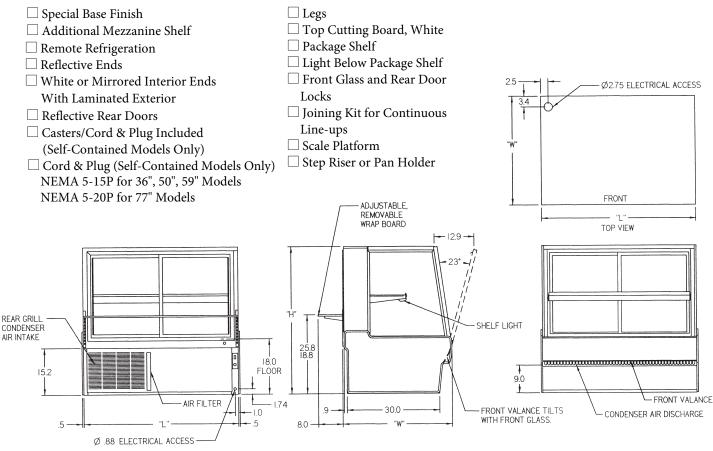

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Capacity (Step Risers)	Self-Contained 120/60/1	Remote 120/60/1
SGR3648CD	36.13" x 35.31" x 48"	590	3	1/3 HP - 9.0 AMPS	2.3 AMPS
SGR5048CD	50.13" x 35.31" x 48"	620	3	1/2 HP - 10.5 AMPS	2.3 AMPS
SGR5948CD	59.13" x 35.31" x 48"	650	4	1/2 HP - 11.6 AMPS	2.5 AMPS
SGR7748CD	77.13" x 35.31" x 48"	860	6	3/4 HP - 14.2 AMPS	3.3 AMPS

• If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.

• Refrigerated cases are designed to operate in a maximum environment of 75° ambient and 55% relative humidity.

• Due to continuing engineering improvements, specifications are subject to change without notice.

Look to Federal for Innovative Merchandising



FEDERAL INDUSTRIES A Standex Company

 215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

 PHONE: 800-356-4206
 FAX: 608-424-3234

 EMAIL: geninfo@federalind.com
 WEBSITE: www.federalind.com

