



FEDERAL
a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

REFRIGERATED SELF-SERVE HIGH PROFILE SPECIALTY MERCHANDISER

MODEL ☐ **RSSM-360SC** ☐ **RSSM-378SC**
☐ **RSSM-460SC** ☐ **RSSM-478SC**
☐ **RSSM-560SC** ☐ **RSSM-578SC**
☐ **RSSM-660SC** ☐ **RSSM-678SC**
☐ **RSSM-878SC**



Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits. Available in lengths of 3', 4', and 6', and 60" or 78" high.


STANDARD FEATURES

- Adjustable black metal shelves with price tag molding. Shelves can be flat or slanted. The 60" case has two tiers of shelves, the 78" case has four tiers.
- LED top light. Shelf lights optional.
- Choice of six standard laminates on exterior. Other color laminates are optional. Black metal front grill and galvanized steel back.
- Silver trim.
- Stainless steel display deck, glass and black interior ends, black interior back panel.
- Energy saving night curtain.
- Electronic temperature control.
- Condensate pump provided on Models RSSM 460, 560, 660, and 878 and all remote models.
- Insulated with high-density urethane foam.
- Continuous line-ups are available for remote applications.
- Refrigeration controls maintain 38°-40°F. Note: Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall (on Self-contained models).
- Thermometer.
- UL Safety and UL Sanitation Listed.


REFRIGERATED SELF-SERVE HIGH PROFILE SPECIALTY MERCHANDISER

OPTIONAL ACCESSORIES:


- | | | |
|--|---|---|
| <input type="checkbox"/> Special Laminate Finish | <input type="checkbox"/> LED Lights Below Shelves | <input type="checkbox"/> Condensate Pump |
| <input type="checkbox"/> Roll-up Security Cover or Removable Night Cover | <input type="checkbox"/> Black or Gold Trim | <input type="checkbox"/> Condensate Evaporator Assembly (Field Install) (Separate 120V, 15A circuit required) |
| <input type="checkbox"/> Wire Shelves in Lieu of Flat Metal | <input type="checkbox"/> Wire Baskets in Lieu of Flat Metal | |
| <input type="checkbox"/> Joining Kit for Continuous Line-ups | <input type="checkbox"/> Deli Meat Hooks or Pegs | |
| <input type="checkbox"/> Remote Refrigeration with Condensate Pump | <input type="checkbox"/> Casters (Self-Contained Models Only) Cord Included | |
| <input type="checkbox"/> Front Condensing Unit Air Discharge | <input type="checkbox"/> Cord & Plug (Self-Contained Models Only) | |
| <input type="checkbox"/> Sliding and Hinged Rear Access Doors | <input type="checkbox"/> Reflective End Glass | |
| <input type="checkbox"/> Rear Side Panel Extensions (Six Inches) | <input type="checkbox"/> Legs, 6" | |
| <input type="checkbox"/> Slim 30" Deep Profile | | |
| <input type="checkbox"/> White Interior (Including Shelving) | | |

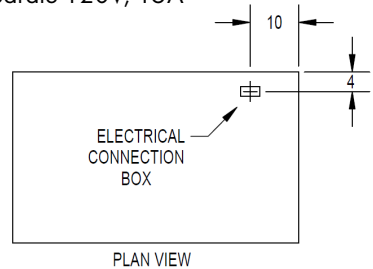


PLAN VIEW

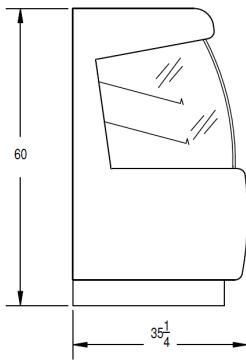


SIDE VIEW

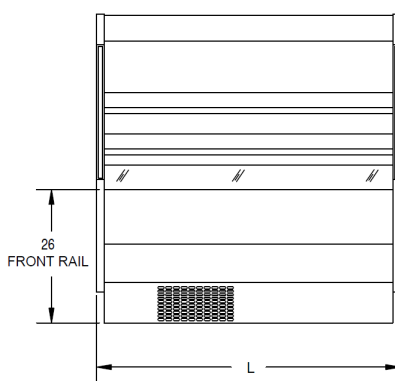

FRONT VIEW

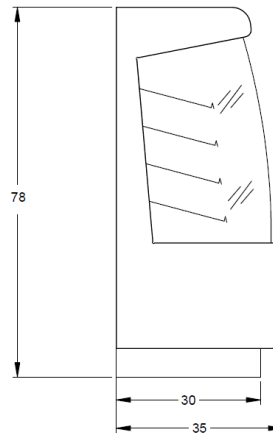

SIDE VIEW

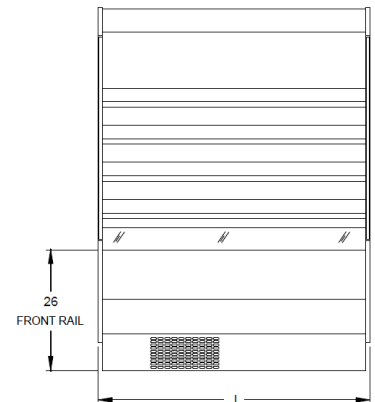

FRONT VIEW

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained 3-Wire + Ground 208-240/60/1	NEMA Plug Configuration	Remote 2-Wire + Ground 120/60/1
<input type="checkbox"/> RSSM-360SC	36" x 35 1/4" x 60"	709	2 (15" x 34")	1/2 HP • 10 AMPS	L14-20P	3 AMPS
<input type="checkbox"/> RSSM-460SC	47 1/4" x 35 1/4" x 60"	800	2 (15" x 45")	3/4 HP • 12.8 AMPS	L14-20P	4 AMPS
<input type="checkbox"/> RSSM-560SC	59 1/4" x 35 1/4" x 60"	960	2 (15" x 57")	1 HP • 15.7 AMPS	L14-20P	5 AMPS
<input type="checkbox"/> RSSM-660SC	71 1/4" x 35 1/4" x 60"	1,020	4 (15" x 34")	1 HP • 15.7 AMPS	L14-20P	6 AMPS
<input type="checkbox"/> RSSM-378SC	36" x 35 1/4" x 78"	835	4 (15" x 34")	1/2 HP • 10 AMPS	L14-20P	3 AMPS
<input type="checkbox"/> RSSM-478SC	47 1/4" x 35 1/4" x 78"	925	4 (15" x 45")	3/4 HP • 12.8 AMPS	L14-20P	4 AMPS
<input type="checkbox"/> RSSM-578SC	59 1/4" x 35 1/4" x 78"	1,160	4 (15" x 57")	1 HP • 15.7 AMPS	L14-20P	5 AMPS
<input type="checkbox"/> RSSM-678SC	71 1/4" x 35 1/4" x 78"	1,220	8 (15" x 34")	1 HP • 15.7 AMPS	L14-20P	6 AMPS
<input type="checkbox"/> RSSM-878SC*	91 1/2" x 35 1/4" x 78"	1,590	8 (15" x 45")	* 1 HP • 20.8 AMPS	L14-30P	8 AMPS

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall on self-contained models.
A 120/208-240 volt, 60 hertz, 1 phase, 3-wire plus ground power supply.
- Refrigerated cases are designed to operate in a maximum of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.

* RSSM-878SC employs two 1.0 HP condensing units.



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

