



**a Standex company**

ITEM: \_\_\_\_\_ PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

## **SERIES '90 SELF-SERVE REFRIGERATED BAKERY OR DELI CASE**

**MODEL** ☐ **SN-4CD-SS**  
☐ **SN-6CD-SS**  
☐ **SN-8CD-SS**



*Series '90. The ultimate merchandiser with advanced styling for maximum visual appeal. Cases are available in lengths of 4', 6', and 8'. Designed for continuous case line-ups.*


### **STANDARD FEATURES**

- All-welded base construction with a choice of six standard laminates on base. Other finishes optional.
- Base trim: Specify white, black, or stainless.
- White display deck.
- White rear wrapping board.
- Four-point leveling system.
- LED rear top lights. Lights are shielded.
- Easily accessible control panel with main power switch, light switch, digital thermometer, and adjustable temperature control.
- Pull-out condensing unit for quick and easy service.
- Energy-saving night curtain.
- Condensate pump.
- Average case temperature of 38° to 40°F is maintained.
- R134A Refrigerant.
- UL Safety and UL Sanitation Listed.

# SERIES '90 SELF-SERVE REFRIGERATED BAKERY OR DELI CASE

## OPTIONAL ACCESSORIES:

- |   |   |
|---|---|
| <input type="checkbox"/> Special Base Finish                          | <input type="checkbox"/> Front Package Shelf With or Without Light Below                            |
| <input type="checkbox"/> Base Trim Specify White, Black, or Stainless | <input type="checkbox"/> Fish Case Package (Includes Ice Pan and Drain)                             |
| <input type="checkbox"/> Black or Stainless Steel Interior            | <input type="checkbox"/> Step Pan Holder or Riser   |
| <input type="checkbox"/> Black Rear Wrapping Board                    | <input type="checkbox"/> Condensate Evaporator Assembly (Field Install, Separate 120V, 15A Circuit) |
| <input type="checkbox"/> Legs   |   |
| <input type="checkbox"/> Cord and Plug (Six Foot)                     |   |

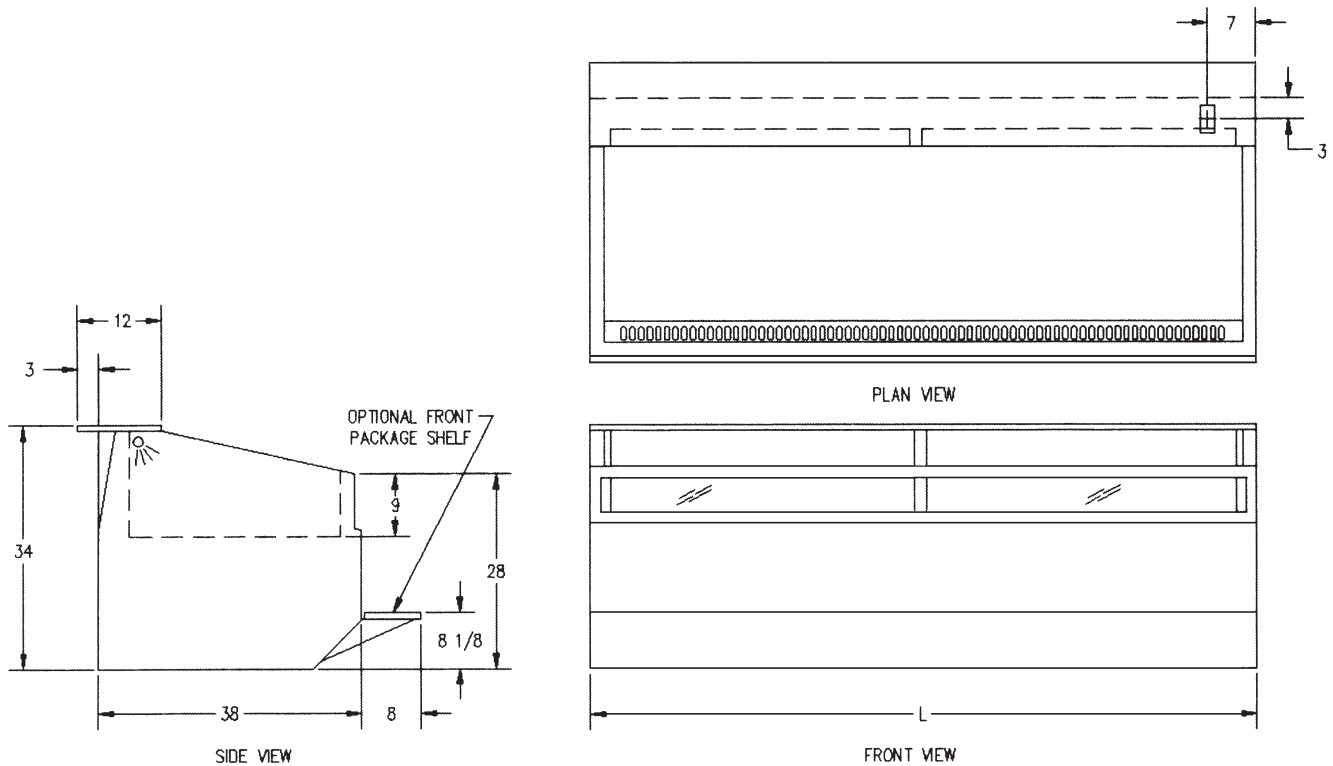

## SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Capacity (Step Pans)	*Self-Contained 120/60/1
<input type="checkbox"/> SN-4CD-SS	48 1/4" x 41" x 34"	610	3	1/2 HP • 12 AMPS
<input type="checkbox"/> SN-6CD-SS	72 1/4" x 41" x 34"	930	5	3/4 HP • 16 AMPS
<input type="checkbox"/> SN-8CD-SS	96 1/2" x 41" x 34"	1,065	7	3/4 HP • 16 AMPS

\*A separate 120/60/1 15 AMP circuit is required for condensate evaporator.

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Cases are designed to operate in a maximum environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



*The Signature of Quality*

**FEDERAL INDUSTRIES**  
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: [geninfo@federalind.com](mailto:geninfo@federalind.com)

FAX: 608-424-3234

WEBSITE: [www.federalind.com](http://www.federalind.com)

