

**APPLICATION:**


**JOB NAME:**

**QUANTITY:**                      **ITEM NO.**

**PRODUCT NAME:**

**PRE-RINSE SPRING STYLE DECK MOUNT**

**SPECIAL CONFIGURATION**  
**CHECK BASE MODEL AND OPTIONS**

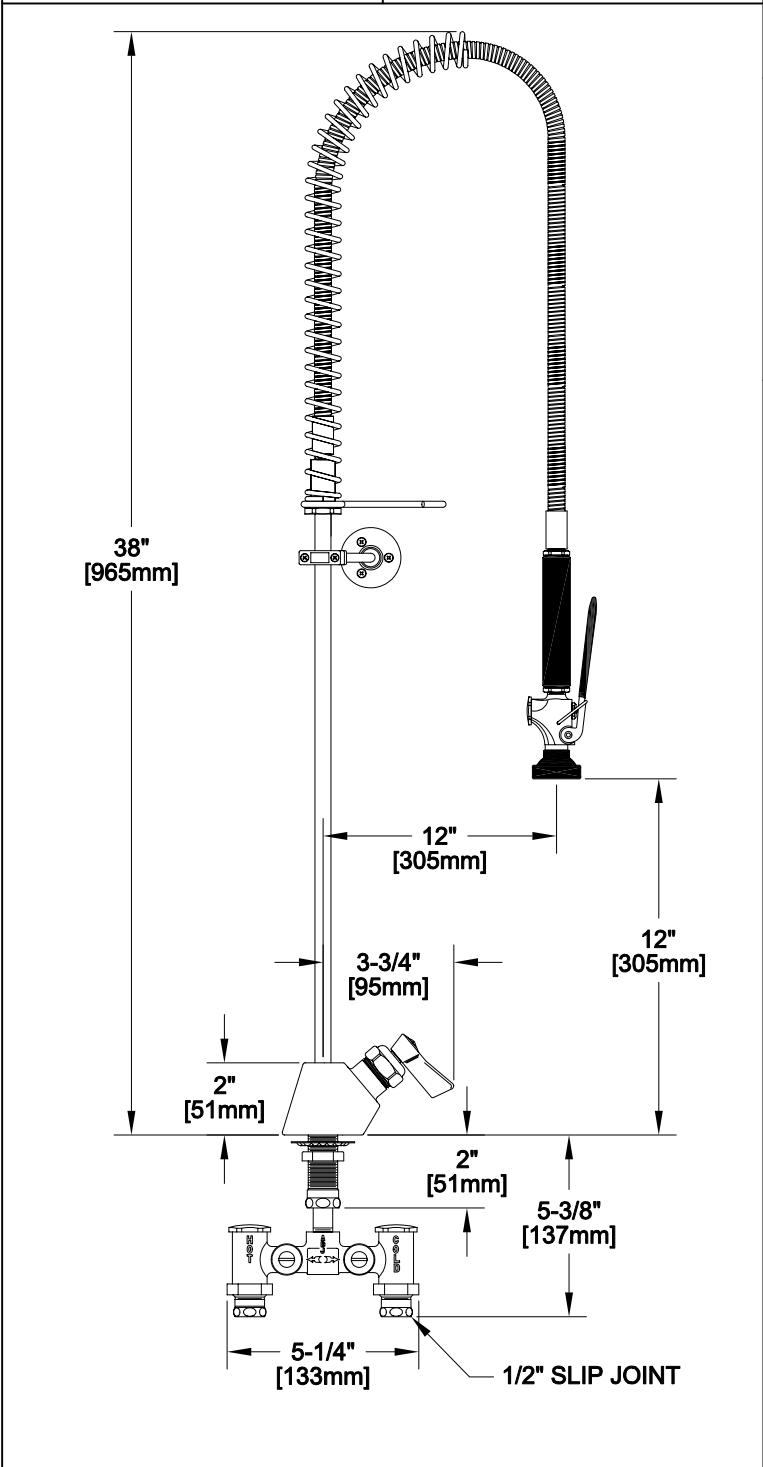

**MODEL:**

2010      **ULTRA SPRAY VALVE, NO WALL BRACKET**

2010-WB   **ULTRA SPRAY VALVE, WALL BRACKET**

**OPTIONS OR MODIFICATIONS:**

**SUPPLY LINES (24" OR 36") CIRCLE LENGTH**

**ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE**

**IN-LINE DUAL CHECK VALVE**

**BRUSH**

**VANDAL RESISTANT KIT**

**HANDLES (CROSS OR WRIST) CIRCLE STYLE**

**OTHER** \_\_\_\_\_

- FEATURES**
- CONTROL VALVE**
- \* SINGLE DECK MOUNT
  - \* TEMPERATURE CONTROL VALVE WITH INTERNAL SPRING LOADED CHECK VALVES
  - \* STEM - LEFT HAND
  - \* HOT & COLD INDEX BUTTONS
  - \* SWIVELLING SEAT DISKS
  - \* STAINLESS STEEL SEATS
  - \* STAINLESS STEEL SEAT SCREWS
  - \* STAINLESS STEEL HANDLE SCREWS
- HOSE**
- \* 36" LENGTH
  - \* STAINLESS STEEL END FITTINGS
  - \* STAINLESS STEEL EXTERNAL JACKET
  - \* 3 PLY FIBER REINFORCED INTERNAL RUBBER HOSE
  - \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS
- ULTRA SPRAY VALVE**
- \* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
  - \* CLEANS FASTER - TEST PROVEN
  - \* ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
  - \* INTERCHANGEABLE - FITS ALL BRANDS
- WALL BRACKET**
- \* ADJUSTS FROM 2" TO 12"
- SYSTEM LIMITS**
- \* TEMP: 40°F MIN. TO 140°F MAX.
  - \* PRESSURE: 200 PSI MAX. STATIC
- SHIPPING WEIGHT**
- \* 12.0 LBS

