

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Mug Frosters



MF48-S2



4004503

Conforms to NSF/ANSI STD 7 and UL STD 471  
Certified to CSA STD C22.2 No. 120

MF

-

Size:

24 = 24" One Door  
36 = 36" One Door  
48 = 48" Two Door

### Finish Options:

B = Black vinyl-clad steel  
S = All stainless steel

### Shelving Options:

(Units include bottom rack for chilling stacked plates. Leave this field blank to order bottom rack only.)  
2 = Two layers (Includes two additional layers of shelves - recommended for chilling glassware.)

### Standard Features

- Self-contained refrigeration
- All stainless steel interior with radius corners is easy to keep clean
- One-piece integral top and mullion design
- Easy to plan exterior dimensions: 24" front to back and 24", 36", or 48" left to right
- Two Defrost Cycles:
  1. Automatic - occurs every eight hours without affecting normal operation
  2. Manual - user initiated button for complete six-hour defrost with automatic restart
- Exterior available with black vinyl-clad steel front and sides and galvanized steel back, or stainless steel front, sides, and back
- Units come standard with bottom rack, which is recommended for chilling stacked plates. Two additional layers of shelves are optional, which is recommended for chilling glassware.
- Automatic condensate evaporator - no drain connection required
- Nine foot grounded cord & plug included (exits left rear)
- Optional 3-3/4" casters or 6" legs are available

### Specifications

#### Electrical

- 120V, 1 phase, 60 Hz, 6.0 full load amps
- Dedicated 15 amp circuit is recommended
- Includes a 9-foot NEMA 5-15P grounded cord and plug which exits the left rear of the refrigeration compartment



5-15P

#### Refrigeration

- 1/3 HP, R290 refrigerant, 4.59 oz.
- 1,300 BTU/hr refrigeration capacity (0.11 tons)
- 2,455 BTU/hr heat rejection
- Operating range: 12°F (-11°C) to 35°F (2°C)
- Fin & tube evaporator with forced air circulation
- Equipped with manual fast freeze mode that accelerates the freezing process and automatically reverts back to the normal operating mode

#### Plumbing

- Interior floor drain and condensate drain to automatic evaporator. No drain connection required

#### Legs

- Optional 6" legs, specify accessory #MLFS
- 1-5/8" diameter
- Stainless steel bullet feet

#### Capacity (Based on 3-1/2" diameter by 5-7/8" high pint glasses)

- 24" Model: 55 pint glass total capacity; 25 bottom shelf, 15 middle shelf, 15 top shelf
- 36" Model: 87 pint glass total capacity; 25 bottom shelf, 31 middle shelf, 31 top shelf
- 48" Model: 147 pint glass total capacity; 45 bottom shelf, 51 middle shelf, 51 top shelf

#### Materials

- Stainless steel parts include: top, door, interior and optional legs. Also, front, sides and back on 'S' models
- Black vinyl-clad steel parts include: front and sides on 'B' models
- Galvanized steel parts include: base on all models and exterior back on 'B' models


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780  
989.752.4275 • 800.748.0423 • Fax 989.752.4444  
[www.glastender.com](http://www.glastender.com)

Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.



# Mug Frosters

## Dimensional Information

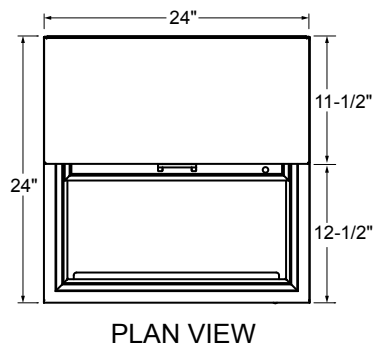


**MF24\***

\*ALL MODELS SHOWN  
WITH OPTIONAL 6" LEGS

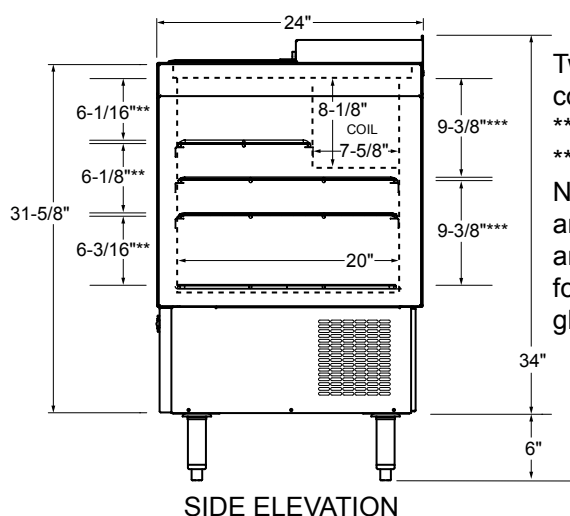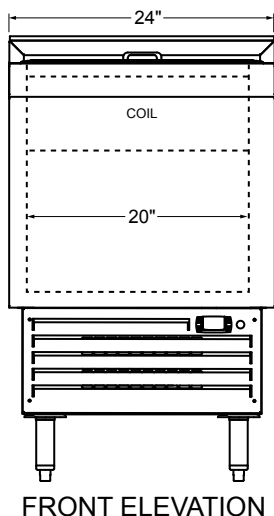




Two shelf configurations:  
\*\* Thirds  
\*\*\* Halves  
NOTE: Shelves are optional and are recommended for chilling glassware

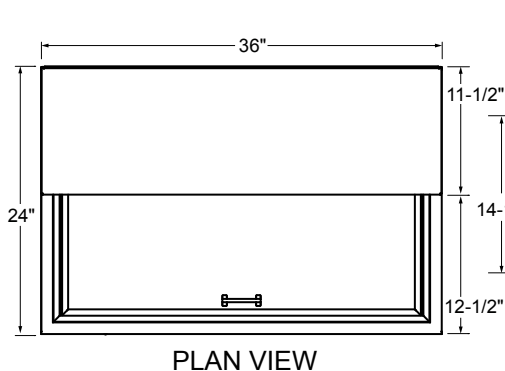

**MF36\***

NOTE: Shelves are optional and are recommended for chilling glassware

Two shelf configurations:  
\*\* Thirds  
\*\*\* Halves

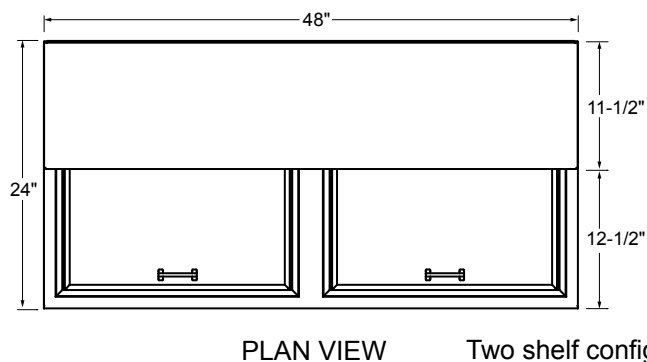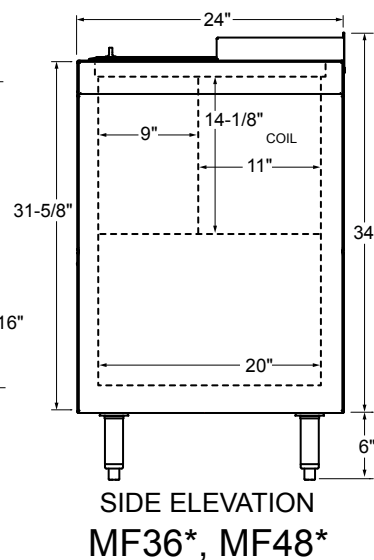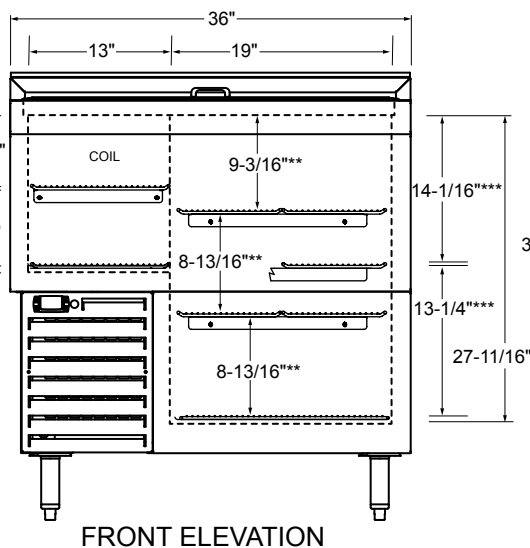

**MF48\***

NOTE: Shelves are optional and are recommended for chilling glassware

Two shelf configurations:  
\*\* Thirds  
\*\*\* Halves

