

# CLASSIC SERIES ESPRESSO MACHINES

| Project | Date | Models                                | Item# | Quantity |
|---------|------|---------------------------------------|-------|----------|
|         |      | CS1-110, CS1-220,<br>CS2-220, CS3-220 |       |          |



model CS1-110




model CS2-220

## Features

- Easy Espresso!
- Elegant design combines a metallic curved front with diamond black sides.
- Pressure gauge/sight glass allows easy monitoring.
- Separate independent auto back flushing allows convenient machine maintenance.
- Stainless steel exchange boiler provides temperature stability.
- Hot water and steam knob features two easy-to-use methods of operation.
- Steam pressure release function ensures safe operation.
- Boiler low water safety feature prevents machine from overheating without water.
- Hot water dispensing wand.
- Raised group heads fits tall, take-away cups.

## Models & Dimensions

### Classic Series Espresso Machines

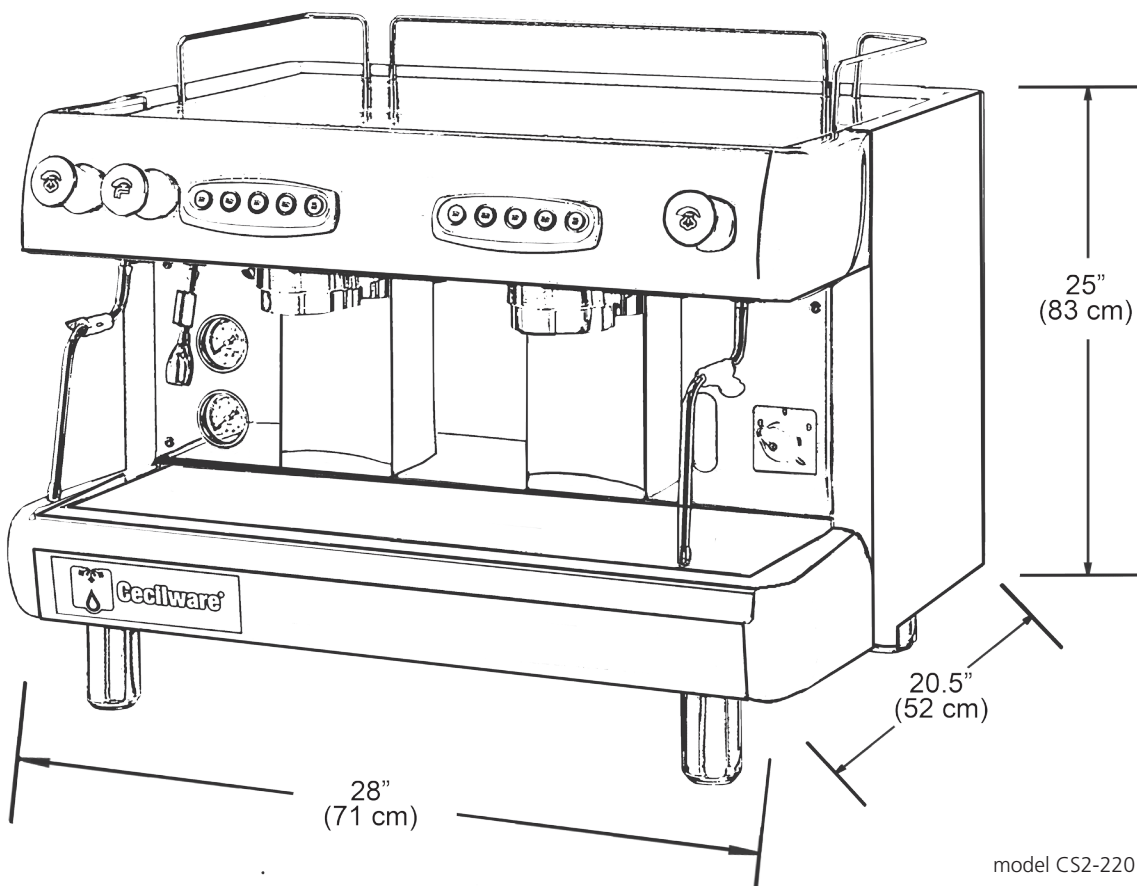

## Specifications

| Model                        | Number of Heads | Boiler Size         | Electrical                       | Product Dimensions (H x W x D)               | Ship Weight         |
|------------------------------|-----------------|---------------------|----------------------------------|----------------------------------------------|---------------------|
| <b>CS1-110</b><br>(1008-000) | 1 Group         | 6 qts.<br>(5.7L)    | 110/120V / 2 kW<br>18 A / 1 Ph   | 25" x 19" x 20.5"<br>(63 cm x 48 cm x 52 cm) | 104 lbs.<br>(47 kg) |
| <b>CS1-220</b><br>(1008-001) | 1 Group         | 6 qts.<br>(5.7 L)   | 220/240V / 2 kW<br>10 A / 1 Ph   | 25" x 19" x 20.5"<br>(63 cm x 48 cm x 52 cm) | 104 lbs.<br>(47 kg) |
| <b>CS2-220</b><br>(1008-002) | 2 Groups        | 13 qts.<br>(12.3 L) | 220/240V / 4.7 kW<br>20 A / 1 Ph | 25" x 28" x 20.5"<br>(63 cm x 71 cm x 52 cm) | 115 lbs.<br>(52 kg) |
| <b>CS3-220</b><br>(1008-003) | 3 Groups        | 19 qts.<br>(18 L)   | 220/240V / 6.5 kW<br>27 A / 1 Ph | 25" x 37" x 20.5"<br>(63 cm x 95 cm x 52 cm) | 148 lbs.<br>(67 kg) |

**Plumbing:** Unit attaches to 0.75" (1.9 cm) hose connection, 0.5" (1.3 cm) water line required. Water pressure between 20PSI and 120 PSI. Use regulator for higher pressure.

**Note:** 4" (10.2 cm) clearance required on side and rear.



Grindmaster-Cecilware™ 4003 Collins Lane, Louisville, KY 40245 USA

Tel: +1.502.425.4776 / 800.695.4500 (USA & Canada only) • Fax: +1.502.425.4664 • [www.gmcw.com](http://www.gmcw.com) • Email: [info@gmcw.com](mailto:info@gmcw.com)