



# RM-45-SD

Glass Door Merchandiser with Sliding Doors



RM-45-SD  
03/09/18  
Item # 13409

W x D x H  
51" x 30.25" x 78.25"

RM-45-SD



This equipment is intended for the storage of non-potentially hazardous bottled or canned products only.



## Dimensions / Capacity

	Two Section RM-45-SD
Interior Storage Capacity (CF)	45 ft <sup>3</sup>
Overall Width x Depth	51" x 30.25"
Height	78.25"
Adjustable Shelves	5 per section
Shelf Dimensions (W x D)	23" x 20.5"
Crated Shipping Weight	545 lbs.
Crated Width x Depth x Height	55" x 34" x 85"

## Electrical / Refrigeration

	Two Section RM-45-SD
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P
Voltage Range	104-126
Ambient Temp. Range	60° to 86°F
Control Setpoint Range	34° to 40°F
Amperage	11.8
Energy Consumption (kWh/day) @ASHRAE	3.84
Approx. Nominal Compres. BTU/HR (HP)	1357 (1/2HP)
Refrigerant / Charge Amount (oz)	R-134a / 7oz.

## Options

## Warranty

- ☐ Organizer shelf (HS-5293) ☐ 4" Casters (HS-5288)
- ☐ Price tag holder (HS-5294) ☐ 2.25" Casters (HS-5037)
- ☐ Epoxy Shelf (HS-5318)

Requires 2 sets of:

★ 3 Year - Parts and Labor on entire machine.  
5 Year - Parts on Compressor  
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

AIA#: \_\_\_\_\_

## Features

- ▶ Electronic controller with visual and audio high and low temperature alarms
- ▶ Forced air evaporator for quick temperature pull down
- ▶ Self closing sliding doors with spring assist and stay open feature
- Large glass doors are energy efficient Low-E multi pane glass
- Automatic energy saving hot gas loop on front edge of refrigeration compartment helps prevent condensation particularly in hot humid environments
- LED illuminated exterior canopy
- Energy efficient vertical LED interior lights illuminate products on display
- Silver painted aluminum exterior with NSF approved white aluminum interior and stainless steel floor
- Electronic controller with energy saving mode will save approximately 40% energy consumption during non-peak hours
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent.
- (5) white epoxy coated shelves per section with product stops are standard
- Stainless steel shelf clips adjustable in 1/2" increments on anodized aluminum supports
- Refrigerant flow is controlled with a capillary tube
- 8 Foot cord and plug
- 2 inch leveling legs standard
- Three years parts and labor warranty
- Five-year compressor warranty

Capacity:

20 oz. bottles: 560  
12 oz. bottles: 1260




# RM-45-SD

Refrigerated Merchandiser - 45 cu.ft.  
With sliding doors




RM-45-SD  
03/09/18  
Item # 13409


## FRONT VIEW

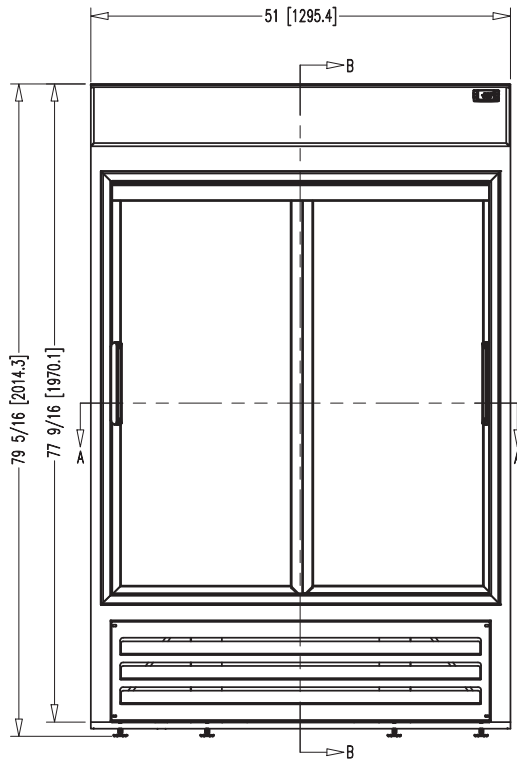


## SIDE VIEW

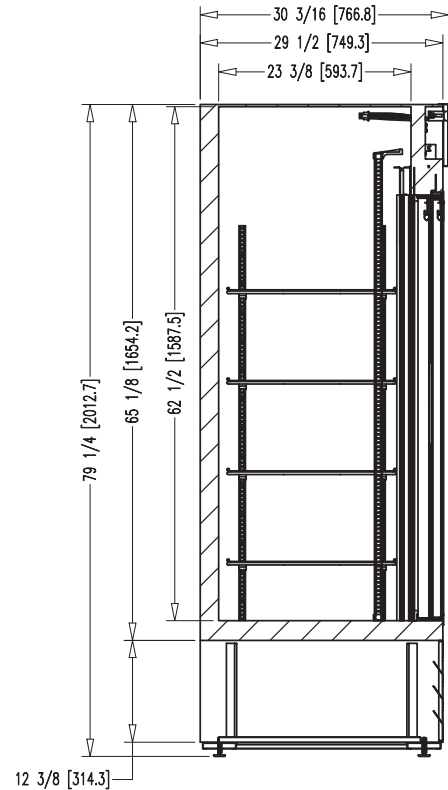

## PLAN VIEW

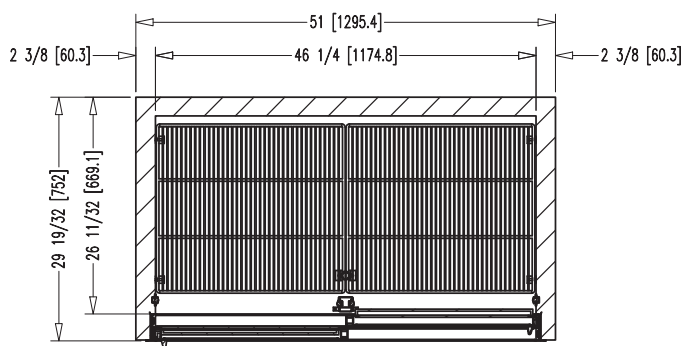

## HEADER DIMS

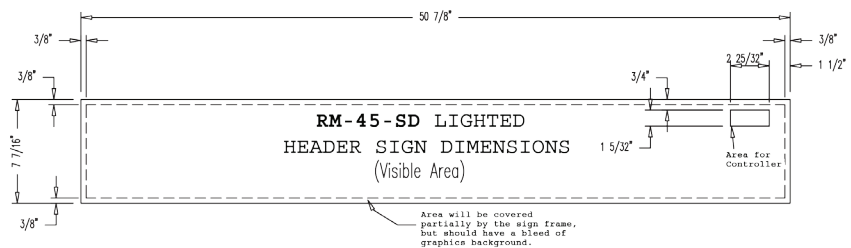

### Graphic Requirements:

- 360 dpi resolution. Scale 1=1
- Colors for CMYK process
- Image with 1/4" of excess by side
- Graphics must be saved in photoshop (with layers)
  - (or your sign company file type requirements)
- Include a full color print out

### Material Requirements:

- 3M exterior grade UV resistant vinyl adhesive

Note: Texts and important parts of the image should be within the visible area.  
The visible area is illustrated by dotted lines when it applies.

Printed in the U.S.A.