



DB-130/200H

SANITARY CUBE DISPENSER



DB-130/200H
09/27/18
Item # 13131

W x D x H

DB-130H

22" x 30" x 53"*

DB-200H

30" x 30" x 53"*

*with 6" legs

Shipping Dimensions

(DB-130H) 30^{1/2}" x 24" x 53"

(DB-200H) 33" x 32^{1/4}" x 54"

DB-130H

Hotel/Motel Ice Dispenser
Shown with a KM-650MWJ

DB-200H

Hotel/Motel Ice Dispenser
Shown with a KML-700MAJ

ADA Compliant



DB-130H



DB-200H



CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE
VERIFIE



Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

► Ice dispensing area is ADA compliant

► Push-button single auger agitator

DB-130H

- Accommodates KM-340, KM-515, KMD-410, KM-600 or KM-650 series cubers for 281 to 680 lbs. of ice per day
- Built-in 130 lbs. capacity* insulated polyethylene-lined ice storage bin
- Pushbutton single auger agitator dispenses ice at 20 lbs. per minute

DB-200H

- Accommodates KML Series, KM-340, KM-515, KM-600, KM-650 series cubers for 307 to 680 lbs. of ice per day
- Built-in 200 lbs. capacity* insulated polyethylene-lined ice storage bin
- Push-button single auger agitator dispenses ice at 13 lbs. per minute

Top kit may be required. See bin matrix in catalog.

Warranty:

3 Year Parts & Labor on entire machine. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

* Capacity based on volume x 30 lb/ft³ average density of ice.

| Model | Application Ice Storage Capacity | Measured Capacity Volume | Dispensing gear motor | Dispensing Rate | Voltage | Amperage | Net / Ship Weight (lbs.) |
|---------|----------------------------------|--------------------------|-----------------------|-----------------|-----------|----------|--------------------------|
| DB-130H | 130 lbs. | 3.7 ft ³ | 60W | 20 lbs./min. | 115V/60/1 | 1.4 | 178 / 215 |
| DB-200H | 200 lbs. | 5.72 ft ³ | 60W | 13 lbs./min. | 115V/60/1 | 1.4 | 187 / 240 |

Power cord not included. Must be hard-wired at site.

Operating Limits

- Ambient Temp Range 45 - 100°F
- Voltage Range 104 - 132V

Service

- Allow 6" (15 cm) clearance at rear and sides for ease of maintenance and/or service. More space is needed on left side of the dispensing bin to service the drive system.

Plumbing

- Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Vending

- Pushbutton - Standard



DB-130/200H

SANITARY CUBE DISPENSER



DB-130/200H
09/27/18
Item # 13131




FRONT VIEW

SIDE VIEW




REAR VIEW

inch
[mm]

DB-130H

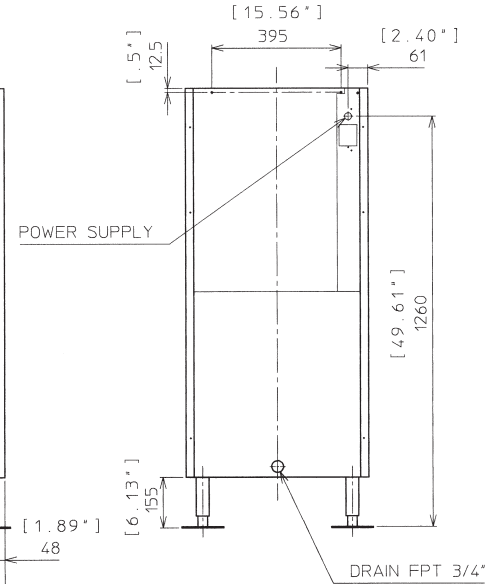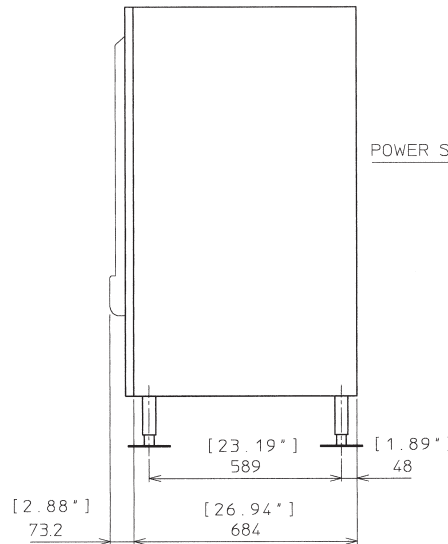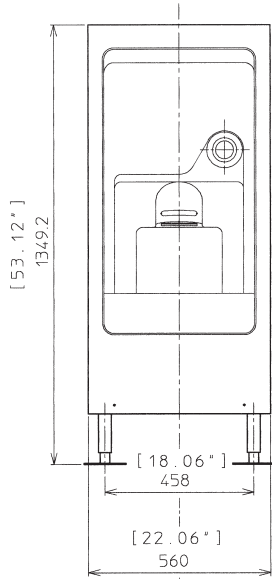

DB-200H

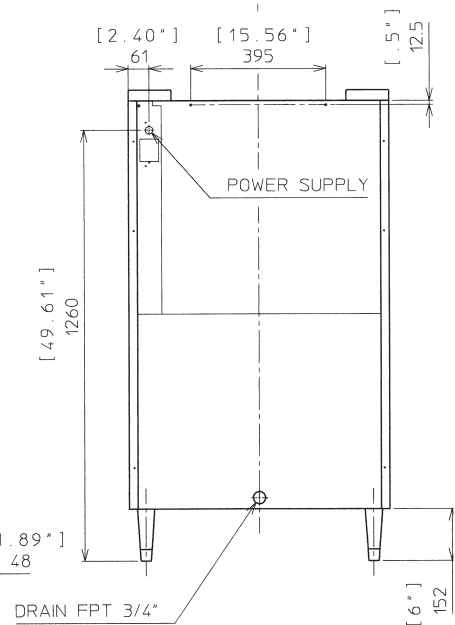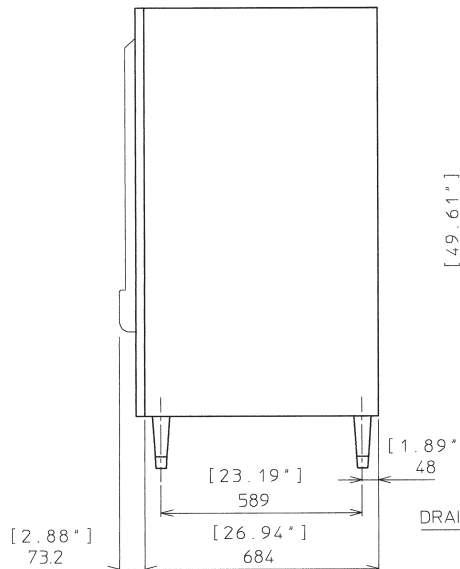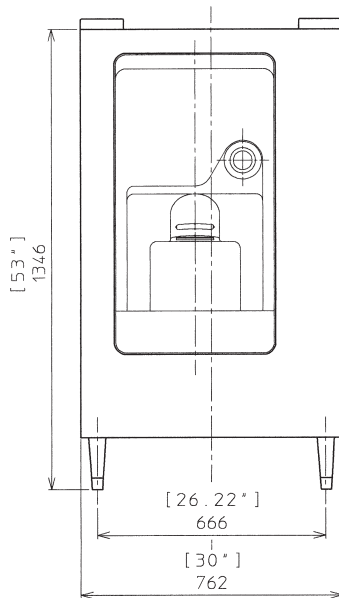

DB-130H & DB-200H Ice Dispenser Opening

