

Model Number
IHPA-2-12SU
IHPA-4-24SU
IHPA-6-36SU
IHPA-8-48SU



Two rings of flame for even cooking no matter the pan size.



Top grate with anti-clogging pilot shield protects the pilot from grease and debris.



Large 5" (127 mm) stainless steel landing ledge for convenient plating.



Durable cast aluminum with a vylox heat protection grip.



IHPA-3-36SU shown

OPEN BURNERS - PyroCentric™ 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.

- Cast iron PyroCentric burners are standard on all IR Series Ranges.
- Burners are anti-clogging and lift-off and separate for easy cleaning.
- No gaskets or screws.
- One standing pilot per burner for instant ignition.




GRATES - Grates measure 12" x 12" (305 x 305 mm). Sections are easy and safe to lift-off for cleaning.

- Grates have a cast-in bowl that directs heat upward.
- Anti-clogging pilot is designed into the grate to shield the pilots from grease and debris.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.

EXTERIOR FEATURES - Stainless steel front, sides and landing ledge for cleanability and professional look.

- Welded and polished stainless steel seams.
- Range Match profile when placed on a refrigerated base or equipment stand.
- Large 5" (127 mm) stainless steel landing ledge is ideal for plating.
- Control knobs are durable cast aluminum with a vylox have a heat protection grip.
- Full width, removable crumb tray for easy cleaning.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.



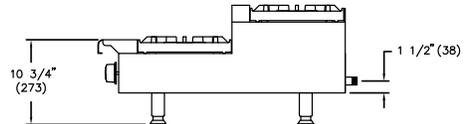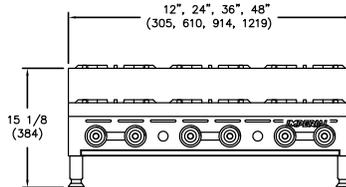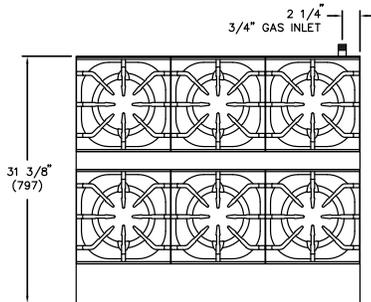

STEP-UP GAS HOT PLATES

TOP	WIDTH	MODEL	OPEN BURNERS	GAS OUTPUT BTU	GAS OUTPUT (KW)	SHIP WEIGHT (KG)	SHIP WEIGHT LBS
	12" (305 mm)	IHPA-2-12SU	2	64,000	(19)	(41)	90
	24" (610 mm)	IHPA-4-24SU	4	128,000	(38)	(68)	150
	36" (914 mm)	IHPA-6-36SU	6	192,000	(56)	(114)	250
	48" (1219 mm)	IHPA-8-48SU	8	256,000	(75)	(145)	320

Measurements in () are metric equivalents.

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-2-12SU	12" w x 31-3/8" d x 15-1/8" h (305 x 797 x 384 mm)	14-1/2" w x 34" d x 17" h (368 x 864 x 432 mm)
IHPA-4-24SU	24" w x 31-3/8" d x 15-1/8" h (610 x 797 x 384 mm)	26-1/2" w x 34" d x 17" h (673 x 864 x 432 mm)
IHPA-6-36SU	36" w x 31-3/8" d x 15-1/8" h (914 x 797 x 384 mm)	38-1/2" w x 34" d x 17" h (978 x 864 x 432 mm)
IHPA-8-48SU	48" w x 31-3/8" d x 15-1/8" h (1219 x 797 x 384 mm)	50-1/2" w x 34" d x 17" h (1283 x 864 x 432 mm)

MANIFOLD PRESSURE	MANIFOLD SIZE
NATURAL GAS 5.0" W.C.	3/4" (19 mm)
PROPANE GAS 10.0" W.C.	

Specify elevation, if over 2,000 ft.

CLEARANCE REQUIREMENTS
Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

- OPTIONS AND ACCESSORIES**
- Stainless steel equipment stands
 - 6" (152 mm) casters for equipment stands
 - 10" (254 mm) stainless steel wok ring
 - Saute burner head, interchangeable
 - Wok burner head, interchangeable
 - Stainless steel wok ring
 - Gas shut off valve 3/4" N.P.T
 - Quick disconnect and flexible gas hose 3/4" N.P.T

