


Data Sheet



Model:

VCB_UH+

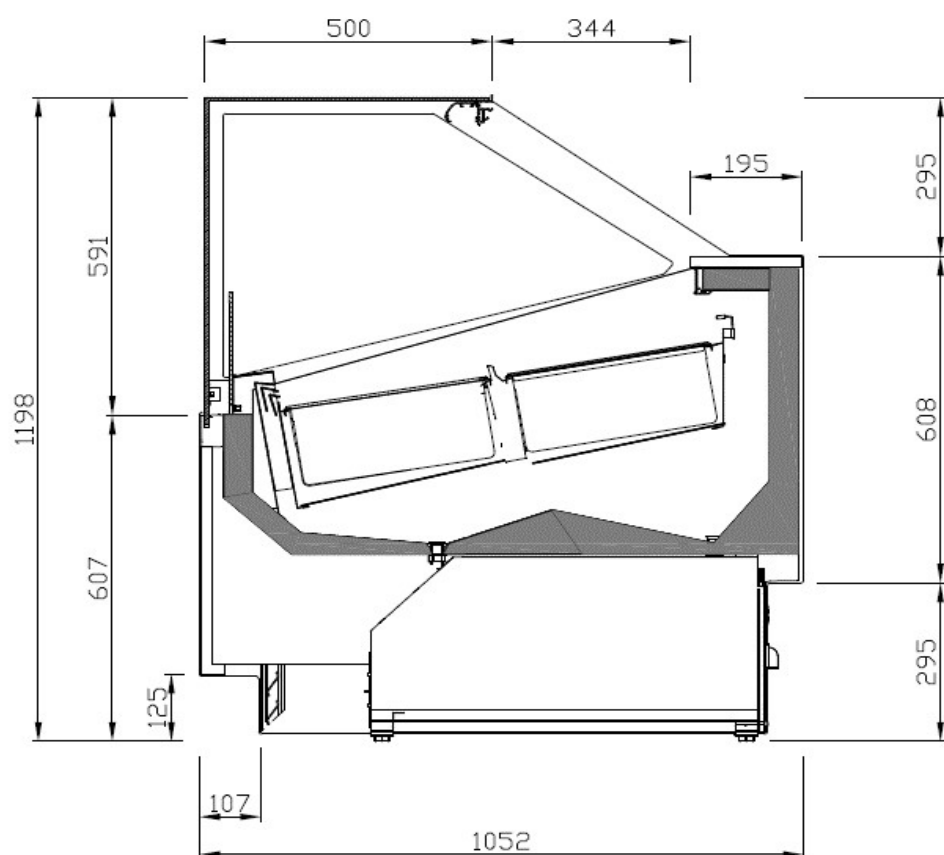

GENERAL DATA


	MODEL		
	VCB12UH+	VCB15UH+	VCB18UH+
	L1	L1	L1
LENGTH (mm)	1200	1562	1875
SIDE WALL THICKNESS (mm)	20+20		
NUMBER OF SELVES	14	16	20
ELECTRONIC CONTRL	DIGITAL		
REFRIGERATED AREA (m ²)	0,96	1,2	1,44
USEABLE VOLUME [lts.]	182	228	274
TDA - AREA TOTAL DISPLAY (m ²)	0,85	1,06	1,27
WEIGHT (kg)	254	317	346
DIMESIONS IN TRANSPORT (mm)	1562 x 1212 x 1415	1562 x 1212 x 1730	1562 x 1212 x 2040

INSTALLATION DETAILS

DATA TABLE

MODEL	1250	1562	1875
A (mm)	410	410	410
B (mm)	753	753	753
C (mm)	255	255	255

DRAINAGE

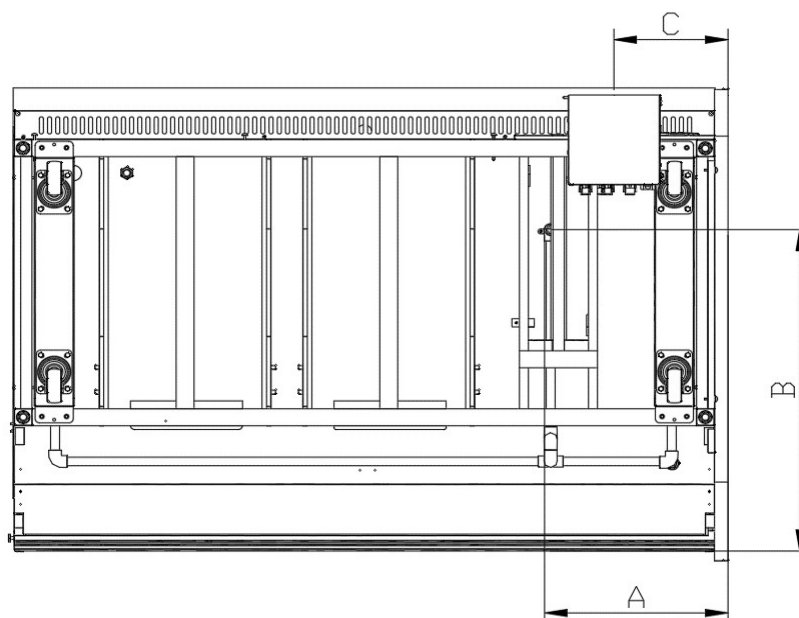

TECHNICAL CONFIGURATION

		L1 [-15°C/-18°C]
INTERIOR TEMPERATURE	SET POINT	-18°C
	DIFFERENTIAL	3°C
DEFROSTING SYSTEM		GAS CALIENTE
NUMBER OF DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		5°C
MAXIMUM DEFROSTING TIME		15'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+35 °C	75 %	7

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	63dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL					
		VCB12UH+		VCB15UH+		VCB18UH+	
Length (mm)		1250		1562		1875	
COMPRESSOR	Nº	1		1	1	1	1
	W	596		412	596	412	596
	A	3,46		2,2	3,46	2,2	3,46
REFRIGERANT	Tipo	R-290a					
	gr	150		120	140	120	150
	Nº	2		3		5	
COIL FANS	W	4,8		4,8		4,8	
	A	0,04		0,04		0,04	
	Nº	2		2		2	
CONDESATOR FANS	W	25		25		25	
	A	0,425		0,425		0,425	
	Nº	2		2		2	
ANTIVARO RESISTANCE	W	336		420		504	
	A	1,46		1,8		2,19	
	Nº	2		2		2	
CANOPY LIGHTING	W	28,34		43,10		51,46	
	A	0,12		0,19		0,22	
	Nº	2		2		2	
POWER	W	1020		1536		1637	
	A	5,97		8,64		9,13	
	Nº	2		2		2	
ENERGY CONSUMPTION	kWh/24h	19,70		28,90		30,80	
ENERGY EFFICIENCY CLASS	(A-G)	