

Project: _____

Location: _____

Item #: _____ Quantity: _____


Model #: _____

MODEL: IDC-VBZ15S


DISPLAY CASES – Ice Cream VBZ Ibiza Small Series.

General Strengths

- ✓ **Sanitation.** Each cabinet has a drain at the bottom of the unit. When cleaning, the unit make sure the drain hose is routed to a floor drain
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user’s requirements.
- ✓ **100% Tested.** All condenser units are 100 % tested, in helium chambers in order to detect refrigeration leaks.
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).

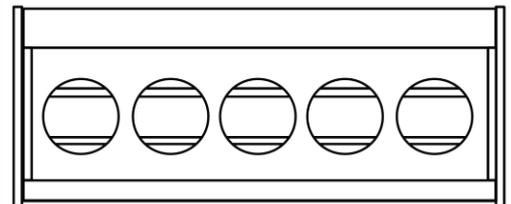

STANDARD

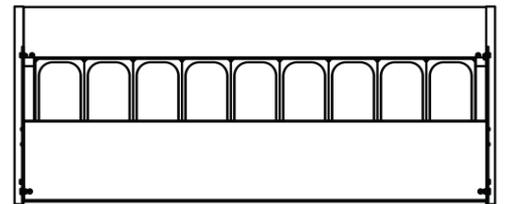

OPTIONAL

MODEL	Dimensions (inches) (mm)			Sides	Round Tubs	Ref.	Refrig. Amount (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IDC-VBZ15S	61-1/2	26-3/8	47-7/8	1-3/16+1-3/16	5	R404A	1.43	2°F / 6°F	9.28	1/3	7.4	475
	1562	670	1215	30+30								

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____

MODEL: IDC-VBZ15S

DISPLAY CASES – Ice Cream VBZ Ibiza Small Series.

STANDARD FEATURES

Exterior

- AISI 304 18/10 Stainless Steel worktop,
- Flat tempered security glass system,
- Enamelled steel base,
- Water resistant frontal and decoration DM lacqued,
- AISI 304 18/10 Stainless Steel lower part decoration.
- LED lighting frontal decoration,

Interior

- Enameled steel plate,
- LED lighting upper profile,

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

Refrigeration

- Digital temperature controller with automatic defrost system,
- Evaporator coil coated with anti-corrosion material 100 % polyester,
- Hot gas defrosts,
- Refrigerant gas R404A,
- Case engineered to operate at 75°F (24°C) and 55% relative humidity.

OPTIONAL FEATURES

- ✓ Customizable decoration for lower front and side panels,
- ✓ Optional decoration: Maroon RAL 3003, Red RAL 3001, Pink RAL 3504035, Orange RAL 2003, Yellow RAL 1018, Beige RAL 1001, Blue RAL 5015, Sky Blue RAL 2108025, Green Dark RAL 6002, Pistachio RAL 1107060, Violet RAL 4007, Black RAL 9017, White RAL 9016.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

Electrical


- Cord and NEMA 5-15 Plug,
- Electrical connection is 115V / 1ph / 60 Hz.




ETL Listed to UL471 Standard and Sanitation classified to NSF7.

PLAN VIEW


ELEVATION

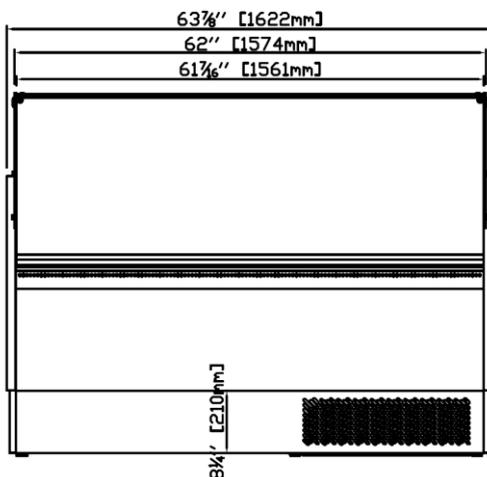

RIGHT VIEW

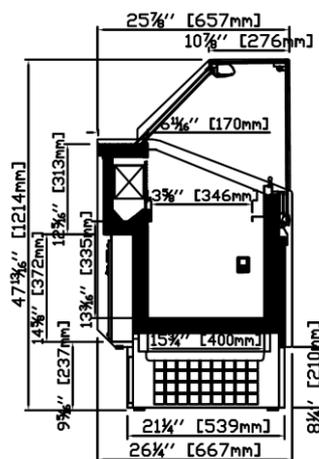

PLAN VIEW

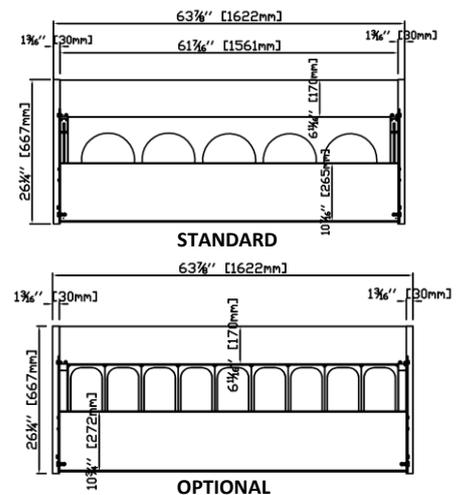

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE