

MODEL: IRR-AN67
**REACH-IN:
Bottom Mounted Reach-in Refrigerators**

DOE COMPLIANT
General Strengths

- ✓ **Energy efficiency higher.** R290 refrigerant with electric fans, LED lighting and evaporative tray without electric resistances
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Greater ability for the adjustment of temperature range as per the end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% to 90% compared to a traditional bulb, better light quality.

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IRR-AN67	82	31-1/8	83-3/8	3	9	R290	0.33	33°F/38°F	67	1/2	6.1	900
	2083	791	2117									

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: IRR-AN67 **REACH-IN: Bottom Mounted Reach-in Refrigerators**

STANDARD FEATURES


- **Exterior**
 - AISI 430 Stainless Steel.
- **Interior**
 - AISI 430 Stainless Steel.
 - Sealed interior floors and rounded cabinet corners,
 - LED lighting,
 - Internal drain plugs for easy cleaning.
- **Insulation**
 - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation,
 - Low GWP & Zero ODP effect.
- **Doors**
 - Polyurethane insulated door,
 - Self closing door with stay open feature,
 - Stainless Steel heavy-duty hinges,
 - Triple chamber snap in door gaskets for easy removal and cleaning,
 - Door locks,
 - Full-height door opening: 23"x53" (584x1346 mm).
- **Casters**
 - 4" diameter casters.
 - Locks provided on front set.
- **Shelving**
 - (3) Three plastic coated wire shelves per door with stainless steel tray slides included,
 - Dimensions WxD: 20-7/8"x25-5/8" (530x650 mm),
 - Tray slides are compatible with 18"x26" (457x660 mm) and 12"x20" (305x660 mm) sheet pans,
 - (6) Six plastic coated tray divider.
- **Refrigeration**
 - Digital temperature controller with automatic defrost system,
 - Energy-saving non-electric condensate pan,
 - Evaporator coil coated with anti-corrosion material 100% Polyester,
 - Forced air refrigeration system,
 - Electric fans,
 - Refrigeration capacity: 2245 Btu/h(14°F) / 658W (-10°C).
- **Electrical**
 - Cord and NEMA 5-15P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.
 - 20 AMP breakers required,
- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**



PLAN VIEW

OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf,
- ✓ Additional slide kits,
- ✓ Set of 6" legs, height adjustable from 5" to 8",
- ✓ Electrical connection is: 230V / 1ph / 50 Hz (plug type varies).

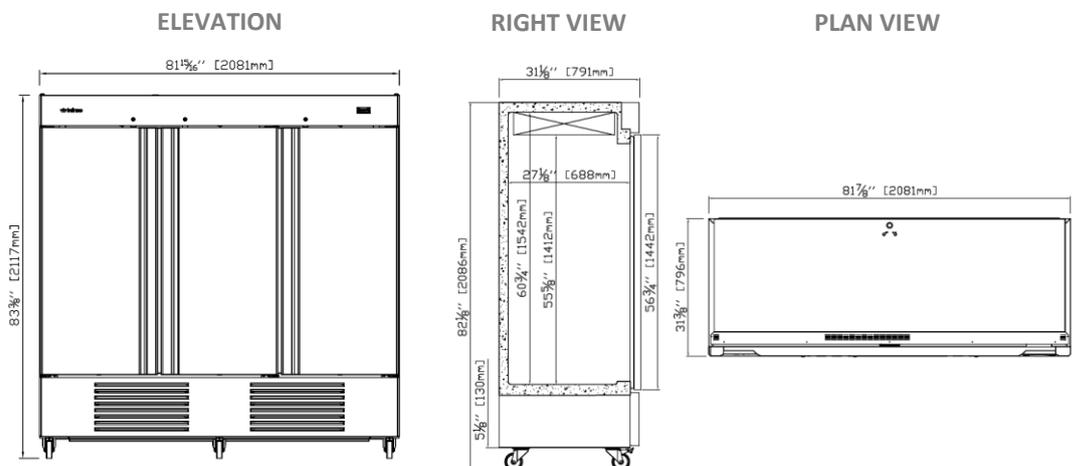

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____