

MODELS: ERV15SD	ERV25SD	ERV35SD	COOLERS: Bottle Coolers
------------------------	----------------	----------------	------------------------------------



ERV 15 SD



ERV 25 SD

General Strengths

- ✓ **Doors.** Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

MODELS	Dimensions (mm)			N° Doors	N° Shelves	Chamber Volume (L)	Gross Volume (L)	Regimen Temp. (°C)	Ref.	Ref. Weight (gr.)	Net Weight (Kg.)
	Width	Depth	High								
ERV15 SD	600	510	920	1	2	140	282	+4 °C / +12°C	R134a	170	61
ERV25 SD	900	510	920	2	4	220	423	+4 °C / +12°C	R134a	270	83
ERV35 SD	1350	510	920	3	6	330	630	+4 °C / +12°C	R134a	210	116

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: **ERV15SD**

ERV25SD

ERV35SD

COOLERS: Bottle Coolers

STANDARD FEATURES

➤ **Exterior**

- Exterior of PVC-coated steel,
- Completely injected compact structure,
- Integrated lock for doors.

► **Interior**

- Interior of PVC-coated steel,
- Wide rounded corners to aid cleaning,
- Interior lighting.

► Insulation

- Insulation by free CFC's polyurethane foam high-pressure injected with density 40 Kg/m³,
- Zero ODP and Low GWP.

➤ **Doors**

- Doors with integrated handle,
- Interior of door inserted with a triple chamber door gasket easy to remove,

➤ **Shelves**

- (2) interior shelves,
- Guides and shelves easy to take off for cleaning.

➤ **Refrigeration**

- Temperature and defrost regulated by a digital controller,
- System of ventilated condensation *INFRICOOL*®,
- System of Forced Evaporation,
- Evaporation tray,
- Evaporator coil coated with anti-corrosion material,
- Climate class 4 (30°C, 55HR).

➤ **Electrical**

- Electrical connection: 220 V / 1 ph / 50 Hz



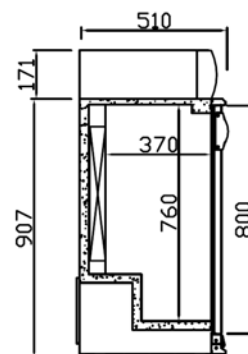






Illuminated
ornamental head

OPTIONAL

- ☐ Wire shelf,
- ☐ Illuminated head,
- ☐ LED lighting,
- ☐ Customizable,
- ☐ Electrical connection 220 V / 1 ph / 60 Hz.,
- ☐ Electrical connection 115 V / 1 ph / 60 Hz.

MODELS	Dimensions Palletizing (mm)			Crated Weight (Kg.)	Power (W)	Comp. (HP)	Cooling Power (W to -10°C)	Cons. (kWh/24h)	Inten. (A)	Level Noise (dB)	Container 20'/40'/40"HC	Trailer
	Width	Depth	High									
ERV15 SD	645	595	1085	69	325	1/6	178	5,5	1,85	53,9	54 / 114 / 114	160
ERV25 SD	945	595	1085	92	350	1/5	254	5,9	1,99	54,6	42 / 88 / 88	112
ERV35 SD	1390	595	1085	129	425	1/4	298	7,1	2,42	57,2	26 / 54 / 54	74

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: **ERV15SD** **ERV25SD** **ERV35SD**
COOLERS:
Bottle Coolers
PLAN VIEW
ELEVATION
PLAN VIEW
RIGHT VIEW
ERV15PP

ERV
ERV25PP

ERV35PP

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
ERV15 SD	292	-	-	-	-
ERV25 SD	500	-	-	-	-
ERV35 SD	680	-	-	-	-

