



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

**MODEL: IDC-VBR12R**      **DISPLAY CASES – Deli / Pastry – Curved Glass**



Rear Sliding Doors, with stay open feature

**General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **Modular Line.** Designed for pastry, Viennese breads and bakery.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

MODEL	Dimensions (inches) (mm)			No Doors	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H								
IDC-VBR12R	50-3/4 1290	31-7/8 810	51-1/8 1300	2	R404A	1.0 450	33°F/41°F 0°C/+5°C	13 365	3/4	7.9	635 288

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
7042 N.W. 46th Street  
Miami, FL 33166  
1.305.777.9599 Office  
1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
service@infrico.com  
sales@infrico.com

APPROVALS: AVAILABLE AT:



Revision: 05      Date: 02/04/2015      VBR12R\_FT\_62\_5



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

MODEL: **IDC-VBR12R**

**DISPLAY CASES – Deli / Pastry – Curved Glass**

**STANDARD FEATURES**

➤ **Exterior**

- AISI 304 Stainless Steel, including stainless top,
- Heavy duty ball transfer and levelling feet,
- Glass sided panels with thermopane double glass,
- Tilt forward glass opening system,
- Standard decoration: White RAL 9016.

➤ **Interior**

- AISI 304 Stainless Steel,
- **LED lighting** in canopy and under each glass shelf,
- Glass shelves built into silver anodized Aluminium frames, easy removable for cleaning.

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ **Doors**

- Rear sliding doors,
- Built-in thermopane double glass.

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Temperature display on front,
- **Double Stainless Steel evaporative pan system, first, by hot gas, second, by electrical resistance,**
- Forced air refrigeration system,
- Case engineered to operate at 75°F (25°C). and 55% relative humidity,
- Refrigeration capacity: 4487 Btu/h(14°F) / 1315 W(-10°C).

**OPTIONAL FEATURES**

- ✓ Customizable decoration for lower front and side panels,
- ✓ Optional decoration: Black RAL 9017, Red RAL3001, Blue RAL 5015, Sky blue RAL DESIGN 2108025, Pistachio RAL DESIGN 1107060, Orange RAL 2003,
- ✓ Dry case system,
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).


➤ **Electrical**

- Cord and NEMA 5-20P plug,
- Electrical connection is 115V / 1ph / 60 Hz.



➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

**PLAN VIEW**

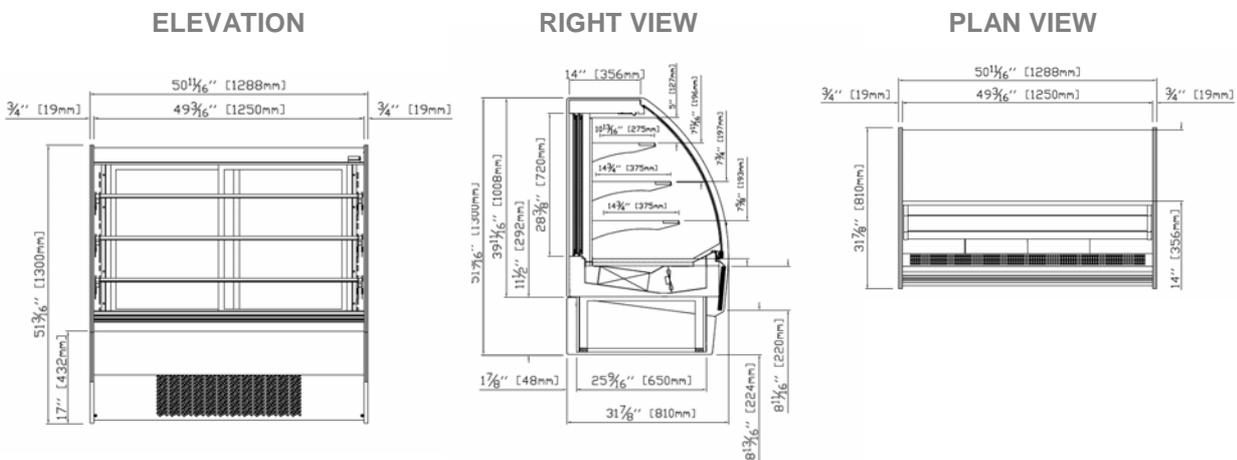

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 7042 N.W. 46th Street  
 Miami, FL 33166  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
 service@infrico.com  
 sales@infrico.com

APPROVALS: AVAILABLE AT:



Revision: 05 Date: 02/04/2015 VBR12R\_FT\_62\_5