

Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **IDC-VAR15HFG**

DISPLAY CASES GELATO – Flat Glass

General Strengths

- ✓ **Sanitation.** Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Modular Line.** Designed for gelato.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

Important: Remove gelato products every night and store th regular freezer, to al defrost cycle and clear equipment.



MODEL	Dimensions (inches) (mm)			Sides	Nº Pans	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IDC-VAR15HFG	61-1/2	43-7/8	52	1-3/16+1-3/16	16	R404A	1.65+1.43	-2°F/+5°F	3.95	1+1/2	6.1 (230V)	930
	1562	1115	1320	30+30								

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 7042 N.W. 46th Street
 Miami, FL 33166
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
service@infrico.com
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____

MODEL: IDC-VAR15HFG
DISPLAY CASES GELATO – Flat Glass
STANDARD FEATURES
➤ Exterior

- White compact quartz worktop,
- Tilt forward frontal tempered glass system,
- DM lacquered decoration, White RAL 9016 or Black RAL 9017 standard decoration,
- Built-in casters and levelling feet.
- Pull down night curtain on the back,

➤ Interior

- AISI 304 Stainless Steel exhibition area,
- **LED Lighting** in the back and front,
- Case is compatible with standard 5 Liter Gelato Pans (13-1/8"x6-1/2"x5-7/8"), pans included.

OPTIONAL FEATURES

- ✓ Customizable decoration for lower front and side panels,
- ✓ Optional decoration: Red RAL 3001, Blue RAL 5015, Pink RAL 3504035,
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ Refrigeration

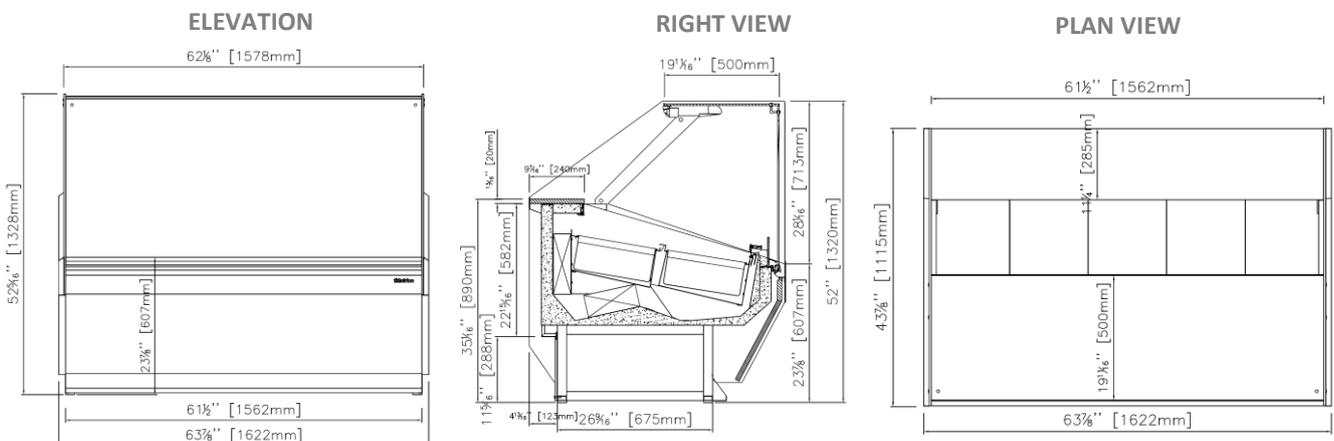
- Digital temperature controller with automatic hot gas defrost system,
- Temperature display on front,
- Stainless steel evaporative pan,
- Forced air refrigeration system,
- Case engineered to operate at 75°F (25°C) and 55% relative humidity,
- Refrigeration capacity: 4060 Btu/h(-31°F) / 1190W(-35°C).

➤ Electrical

- Cord and NEMA L14-30P plug,
- Electrical connection is 230V (Compressor) and 115V (Digital Control) / 1ph / 60 Hz.



- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW


ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 7042 N.W. 46th Street
 Miami, FL 33166
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 service@infrico.com
 sales@infrico.com

APPROVALS: _____ **AVAILABLE AT:** _____