

MODEL: IUC-MSG72
**CHEF BASES:
Drawered Refrigerator**

General Strengths

- ✓ **Worktop.** Cabinet top is one piece, heavy duty reinforced stainless steel. Drip resistant “V” edge protect against spills.
- ✓ **Drawers.** All drawers include triple chamber door gaskets, easy to remove and snap in. Heavy-duty stainless-steel slides hold up to 440 lbs. Integrated handle and self-closing system.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user’s requirements.
- ✓ **100% Tested.** All condensing units are 100% tested in helium chambers for refrigeration leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

**HOLD UP TO 1000 LBS
(454 KG)**



AISI 304 Stainless Steel worktop with drip guard marine edge, standard.



Heavy-duty stainless-steel drawer slides designed to hold up to 440 Lbs.
(Pans Not Included)

| MODEL | Dimensions (inches) (mm) | | | Nº Drawers | Nº Pans | Ref. | Ref. Weight (Lbs.) (gr.) | Temp. Range (°F) (°C) | Capacity (Cu. Ft.) (L) | Cond. Unit. H.P. | Case Amps 115 V. | Crated Weight (Lbs.) (Kg.) |
|-----------|--------------------------|--------|--------|------------|---------|-------|--------------------------|-----------------------|------------------------|------------------|------------------|----------------------------|
| | W | D | H | | | | | | | | | |
| IUC-MSG72 | 72-5/8 | 32-1/2 | 26-1/4 | 4 | 8 | R134a | 0.64 | 33°F/38°F | 14.3 | 1/3 | 6.5 | 560 |
| | 1845 | 825 | 666 | | | | 290 | 0°C/4°C | 405 | | | 254 |

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IUC-MSG72 **CHEF BASES:**
Drawered Refrigerator

STANDARD FEATURES

➤ **Exterior**

- AISI 304 Stainless Steel Top. Drip resistant “V” edge protects against spills,
- Front and sides in AISI 430 Stainless Steel.

➤ **Interior**

- AISI 430 Stainless Steel,
- Sealed interior floors.

➤ **Casters**

- 4” diameter casters,
- Locks provided on front set.

➤ **Drawers**

- Each drawer accommodates two full 12”x20” pans (pans not included),
- Drawers with full-extension sliding rails for complete opening,
- Drawers with integrated handle,
- **Heavy-duty stainless-steel drawer slides designed to hold up to 440 Lbs (200 Kg.).**

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation,
- Low GWP & Zero ODP Effect.

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Stainless steel evaporative pan,
- **Compact refrigeration system monoblock, INFRIBLOCK®,**
- **Extractable condensing unit for easy service,**
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Front-breathing refrigeration system,
- Forced air refrigeration system,
- Refrigeration capacity: 1550 Btu/h (14°F) / 454 W (-10°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,




➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

OPTIONAL FEATURES

- ✓ Set of 6” legs, height adjustable from 5” to 8”,
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

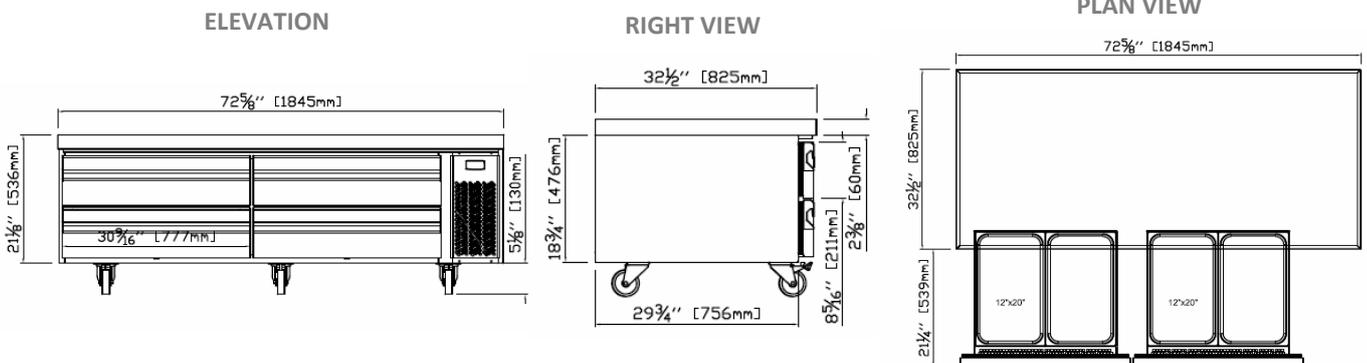

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____

AVAILABLE AT: _____