

Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: IMD-ERV25II

BOTTLE COOLER – Stainless Steel

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Easy removal of shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Greater ability to adjust of temperature ranges as per the end user’s requirements.
- ✓ **100% Tested.** All condenser units are 100% tested, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).
- ✓ **Lighting.** LED lighting inside the cabinet sides reduces the energy consumption.



MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IMD-ERV25II	35-1/2 900	20-1/8 510	35-3/4 907	2	2	R134a	0.59 270	39°F/54°F 4°C/12°C	8 220	1/5	3.4	280 127

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____

Revision: 03 Date: 07/02/2018 ERV25II_FT_62_3

MODEL: IMD-ERV25II

BOTTLE COOLER – Stainless Steel

STANDARD FEATURES

➤ **Exterior**

- AISI 430 Stainless Steel,
- Completely injected compact structure,
- Doors lock,

➤ **Interior**

- Interior grey plastic-coated steel,
- LED lighting.

➤ **Doors**

- Double glass doors (6-10-4),
- Triple chamber snap in door seals for easy removal,
- The black plastic handle is included in the doors,

➤ **Insulation**

- High density CFC free Polyurethane foam.

➤ **Shelving**

- (2) interior shelves,
- Guides and shelves easy to take off for cleaning.

➤ **Refrigeration**

- Temperature and defrost regulated by digital controller.
- System of ventilated condensation *INFRICOOL*®.
- Forced evaporation system,
- Evaporative pan,
- Evaporator coil coated with anti-corrosion material.
- Refrigeration capacity: 867 Btu/h (14°F) / 254 W (-10°C).

OPTIONAL FEATURES

- ✓ Set of 4" Casters, front locking,
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies),
- ✓ Electrical connection is 220-230 V / 1ph / 60 Hz (plug type varies).


➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 20 AMP breakers required,



- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

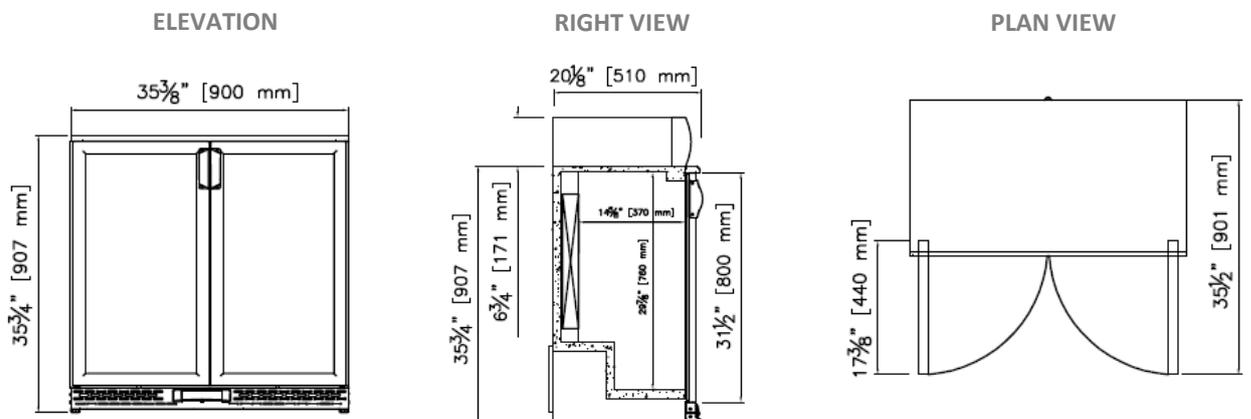

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE