

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: **IRR-AGB45RIBT**

REACH-IN:
Top Mounted Reach-in Freezers – Roll-In.

General Strengths

- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible, parts not included.
- ✓ **Control systems.** Greater ability for the adjustment of temperature range as per the end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).



MODEL	Dimensions (inches) (mm)			Nº Door	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGB45RIBT	37	42-1/4	96	1	-	R404A	1.38	-5°F/0°F	45.24	5/8	14.0	600
	940	1075	2440				620	-21°C/-18°C	1281			272

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: **IRR-AGB45RIBT**

REACH-IN:
Top Mounted Reach-in Freezers – Roll-In.

STANDARD FEATURES

➤ Exterior and Interior

- AISI 304 Stainless Steel.
- Built with removable panel for easy installation,
- Isolated floor with 3-1/8" (80 mm) thick with ramp included,

➤ Doors

- Polyurethane insulated door,
- Self-closing door with stay open feature,
- Heavy-duty hinges,
- Triple chamber snap in door seals for easy removal and cleaning,
- Full-height door opening 27-5/8" x 72-7/8" (702x1851 mm).

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation 3-1/8" (80 mm) thick,
- Low GWP & Zero ODP effect.

➤ Refrigeration

- Digital temperature controller with automatic defrost system,
- Expansion valve and hot gas defrost system for low temp units,
- Compact refrigeration system **monoblock**, INFRIBLOCK[®],
- Energy-saving non-electric condensate pan,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Refrigerant gas R404A,



➤ Electrical

- Cord and NEMA 5-20 plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 20 AMP breakers required,




➤ ETL Listed to UL471 Standard and Sanitation classified to NSF7.

OPTIONAL FEATURES

- ✓ Electrical connection is 230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

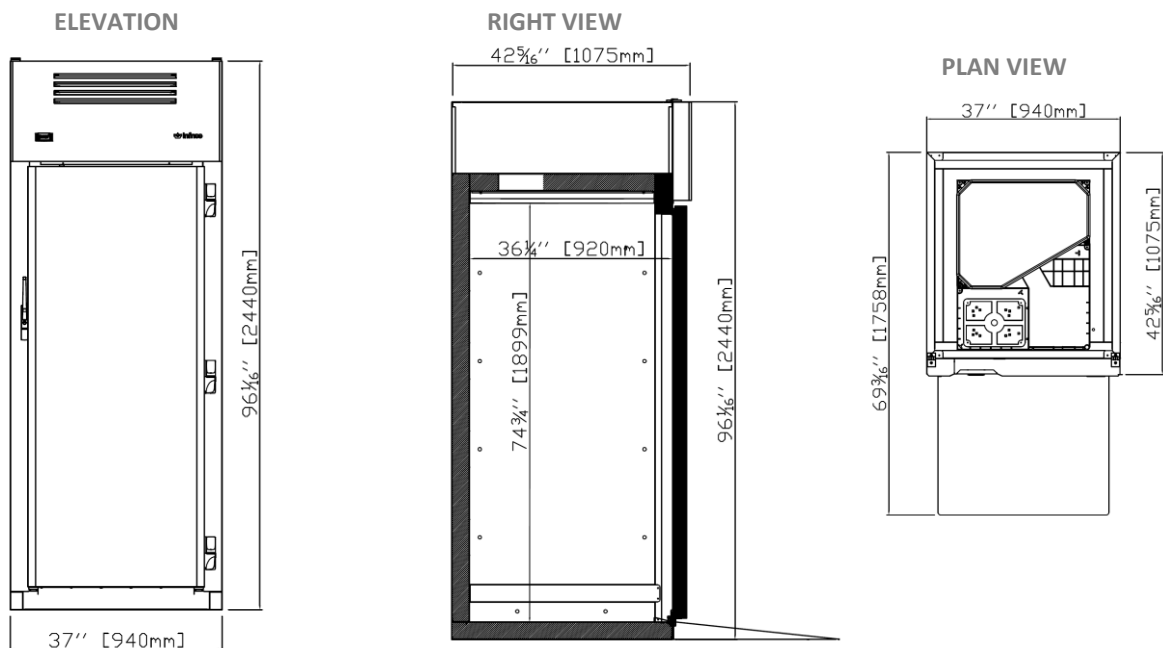

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE