

ITEM #:	QTY:
MODEL #:	
PROJECT NAME:	

071017

3601 S. Banker St. Effingham, IL 62401 • P.O. BOX 609 • Ph: (888) 431-2667 • Fax: (800) 433-2667

"EPT6R10" STAINLESS STEEL PREP TABLE W/ SINK



- WITH 16GA STAINLESS STEEL WORK TOP
- WITH STAINLESS BASE & ADJUSTABLE UNDERSHELF

256135 SANITATION

FEATURES:

- 16 GAUGE STAINLESS STEEL TOP W/ 10" RISER & TURNDOWN
- TYPE 300 STAINLESS STEEL WITH # 4 POLISH, SATIN FINISH
- 1 1/2" STALLION EDGE ON FRONT WITH SIDE EDGES 90 DEGREE BEND DOWN FOR TABLE LINE-UP
- (1) 16" X 20" X 12" BOWL & (1) 16" X 20" X 4" BOWL
- (1) 18" X 22" X 5/8" POLY CUTTING BOARD
- · STAINLESS STEEL UTENSIL DRAWER
- · STAINLESS STEEL BASE WITH ADJUSTABLE UNDERSHELF
- ADJUSTABLE BULLET FEET
- SHIPPED KNOCKED-DOWN, EASY-TO-ASSEMBLE
- NSF CERTIFIED
- ** INCLUDES (1) DECK MOUNTED FACUET 4" O/C W/ 10" SWING SPOUT

CONSTRUCTION:

 TOP: STAINLESS STEEL TOPS ARE TIG WELDED, EXPOSED WELDS ARE POLISHED TO MATCH ADJACENT SURFACE.

MATERIAL:

- TOP: 16 GAUGE STAINLESS STEEL TYPE 300 STAINLESS STEEL WITH # 4 POLISH, SATIN FINISH
- SHELF: 18 GAUGE STAINLESS STEEL,
- LEGS: 1 5/8" ROUND O.D. 16 GAUGE TUBULAR STAINLESS STEEL
- · GUSSETS: STAINLESS STEEL
- FEET: 1" ADJUSTABLE STAINLESS STEEL BULLET FEET

ADJUSTABLE SHELF



L = LEFT BOWL R = RIGHT BOWL





STAINLESS STEEL PREP TABLE W/ SINK


30" WIDE	QTY	
EPT6R10-DL2B-72L		
EPT6R10-DL2B-72R		
EPT6R10-DL2B-96L		
EPT6R10-DL2B-96R		



DETAILED SPECIFICATIONS

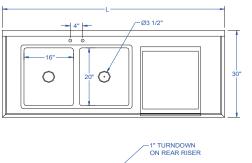

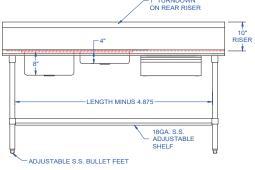




- · ALL UNITS SHIP UNASSEMBLED FOR REDUCED SHIPPING COST.
- · UNITS 7 FT. AND LARGER ARE FURNISHED WITH SIX LEGS.
- · ALL DIMENSIONS ARE TYPICAL.
- TOLERANCE +/- .500".
- FINISHED SIZE OF UNDERSHELF.
 SHELF LENGTH = LENGTH MINUS 4.875"
 SHELF WIDTH = WIDTH MINUS 4.25"

STAINLESS STEEL PREP TABLE W/ SINK

LENGTH	30" WIDE	WT. (LBS)
72"	EPT6R10-DL2B-72L	328
72"	EPT6R10-DL2B-72R	328
96"	EPT6R10-DL2B-96L	360
96"	EPT6R10-DL2B-96R	360

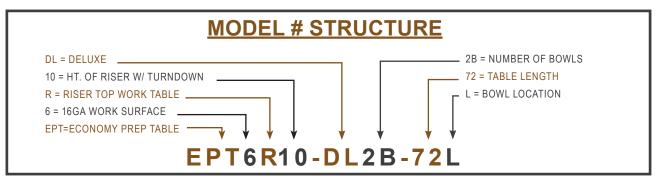

SOME UNITS SHIP UNASSEMBLED FOR REDUCED SHIPPING COST. ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500"

John Boos & Co. is constantly engaged in a program of improving products and therefore reserves the right to change specifications without prior notice.





