John BOOS
Since 1887

ITEM #: _____ QTY: _____

MODEL #: _____

PROJECT NAME: _____

101018

3601 S. Banker St. Effingham, IL 62401 • P.O. BOX 609 • Ph: (888) 431-2667 • Fax: (800) 433-2667

"PBHS-W-KV1APS-EW" HAND SINK WITH EYE WASH
KNEE ACTIVATED FAUCET WITH HINGED FRONT APRON

NSF

FEATURES:

- ONE PIECE DEEP DRAWN BOWL WITH LARGE RADII CORNERS
- INCLUDES 3.5" SPLASH MOUNT GOOSENECK FAUCET
- INCLUDES EYE WASH ATTACHMENT
- KNEE ACTIVATED FAUCET WITH HINGED FRONT APRON
- INCLUDES BASKET DRAIN
- LEFT AND RIGHT HAND SIDE SPLASHES ON -SSLR MODEL

CONSTRUCTION:

- BOWL: STAINLESS STEEL TOPS ARE TIG WELDED, EXPOSED WELDS ARE POLISHED TO MATCH ADJACENT SURFACE

MATERIAL:

- BOWL: TYPE 300 STAINLESS STEEL WITH #4 POLISH, STAIN FINISH
- BRACKET: TYPE 300 STAINLESS STEEL WITH #4 POLISH, SATIN FINISH

PBHS-W-KV1APS-EW-SSLR

PBHS-W-KV1APS-EW-SSLR

KNEE ACTIVATED FAUCET
WITH HINGED FRONT APRON

EYE WASH DISCLAIMER

IMPORTANT: Faucet-mounted eyewash requires two motions to operate (turn on water, pull knob to activate eyewash flow). Therefore, John Boos does not believe that these units meet the provisions of ANSI Z358.1-2014 as eyewash units. These units are intended solely as supplemental units in addition to dedicated, plumbed eyewash equipment installed in the workplace.

Faucet -mounted eyewashes should be used with cold or warm water only. Use of hot water might cause scalding.
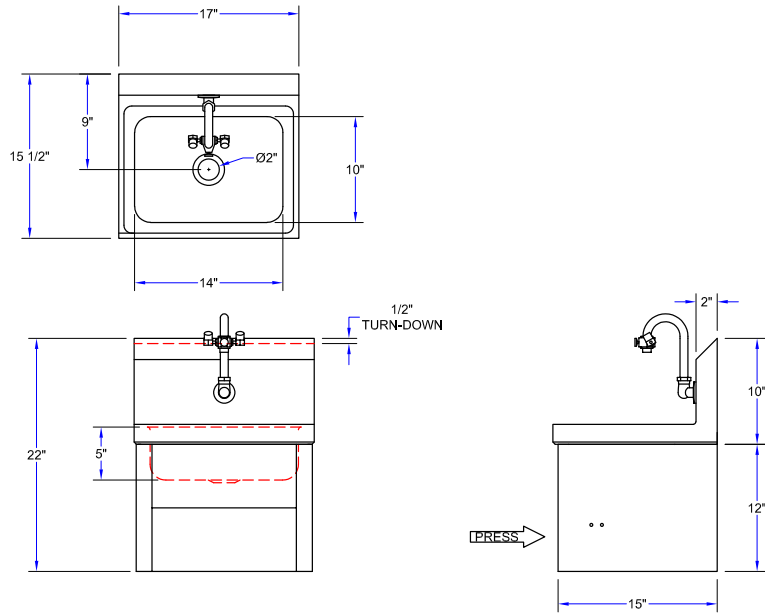
Eyewash attachment not to be used with electronic faucets.
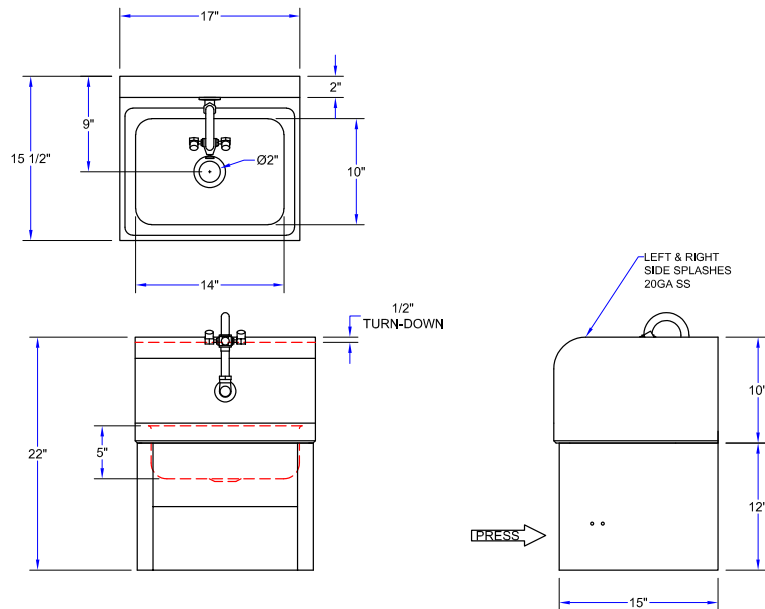
HAND SINK WITH EYE WASH

MODEL #	QTY
PBHS-W-KV1APS-EW	
PBHS-W-KV1APS-EW-SSLR	

DETAILED SPECIFICATIONS

PBHS-W-KV1APS-EW

17"
9"
15 1/2"
Ø2"
10"
14"
1/2" TURN-DOWN
22"
5"
2"
10"
12"
PRESS
15"

PBHS-W-KV1APS-EW-SSLR

17"
2"
9"
15 1/2"
Ø2"
10"
14"
1/2" TURN-DOWN
22"
5"
LEFT & RIGHT SIDE SPLASHES 20GA SS
10"
12"
PRESS
15"

HAND SINK WITH EYE WASH

MODEL #	BOWL SIZE (LxWxD)	SINK SIZE (LxWxD)	DRAIN SIZE	FAUCET LOCATION	SIDE SPLASH
PBHS-W-KV1APS-EW	14" X 10" X 5"	17" X 15-1/2" X 22"	1-7/8"	SPLASH MOUNT 1 HOLE CENTERED	N/A
PBHS-W-KV1APS-EW-SSLR	14" X 10" X 5"	17" X 15-1/2" X 22"	1-7/8"	SPLASH MOUNT 1 HOLE CENTERED	LH & RH

SOME UNITS SHIP UNASSEMBLED FOR REDUCED SHIPPING COST. ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500"
John Boos & Co. is constantly engaged in a program of improving products and therefore reserves the right to change specifications without prior notice.

RENEWABLE + SUSTAINABLE HARDWOODS
KCL
REVIT (BIM)
Boos Block
AQ AutoQuotes