

# BACK BAR STORAGE DRY STORAGE BACK BAR CABINETS

MODEL:	PROJECT:	ITEM #:	QTY:	

# **PRODUCT IMAGE**



BD48-SSS-LR SHOWN with OPTIONAL 1" TOP and KICK PLATES

**AVAILABLE IN 24", 48" & 72" SIZES** 

# STANDARD FEATURES

## Top

18 gauge galvanized sub top Optional 20 gauge stainless steel top

## Sides

20 gauge stainless steel

## Doors

Black vinyl or 20 gauge stainless steel (foamed-in-place)

## Back and Bottom

20 gauge galvanized back. 18 gauge galvanized bottom

## Interior

24" Model: 20 gauge galvanized steel
48" & 72" Models: 20 gauge stainless steel
Two adjustable epoxy coated shelves and floor rack per door

#### Exterior

Black Vinyl Clad Models: 20 gauge stainless steel Stainless Steel Models: 20 gauge stainless steel

### Insulation

2" thick foamed-in-place polyurethane

# **OPTIONAL ACCESSORIES**

BS-100	Four 6" Stainless Steel Legs
BS-101	Six 6" Stainless Steel Legs (72" model)
<b>BS-102</b>	Four 4" Stainless Steel Legs
BS-103	Six 4" Stainless Steel Legs (72" model)
<b>BS-106</b>	Left Side Stainless Steel Kick Plate
BS-107	Right Side Stainless Steel Kick Plate
<b>BS-124</b>	24" Stainless Steel Front Kick Plate
BS-148	48" Stainless Steel Front Kick Plate
<b>BS-172</b>	72" Stainless Steel Front Kick Plate
BC-130	Four 1" Ultra Low profile casters with Brakes
BC-131	Six 1" Ultra Low profile casters with Brakes (72" model)
BC-132	Four 2" Low profile casters with Brakes
BC-133	Six 2" Low profile casters with Brakes (72" model)

Four 3" casters with Brakes

Six 3" casters with Brakes (72" model)

# **APPROVED BY:**

BC-134

BC-135

Due to our commitment to continued product improvement, specifications are subject to change without notice.




# REFRIGERATION


# DRY STORAGE BACK BAR CABINETS

MODEL: \_\_\_\_\_ PROJECT: \_\_\_\_\_ ITEM #: \_\_\_\_ QTY: \_\_\_\_

ONE DOOR (24") or TWO DOOR (48")

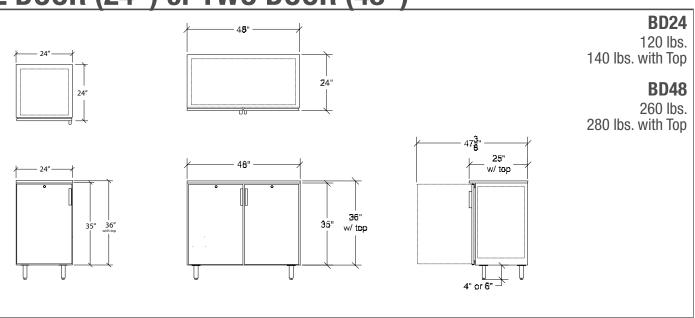

**THREE DOOR (72")** 

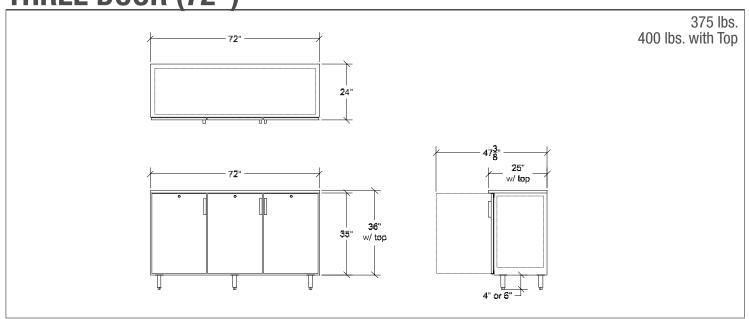

Note: Optional casters raise height 1" higher than wheel size

Note: Optional 4" or 6" legs available

# **APPROVED BY:**

**CERTIFICATIONS:**Due to our commitment to continued product improvement, specifications are subject to change without notice.