

HydroSift Adapter



Model	Description
23-206	HydroSift Adapter

Standard Features


- Twist-to-lock technology for secure, fast and easy connection
- Reduces from 3/4" NPT to 1/2" CTS connections, providing a seamless transition between different pipe sizes
- Durable construction
- Compatible with various pipe materials such as copper, PEX and CPVC piping

Specifications

Material	▪ Acetal
Inlet/Outlet	▪ 3/4" NPT x 1/2" CTS
Working Pressure and Temperature	▪ 80PSI at 200°F ▪ 100PSI at 180°F ▪ 160PSI at 73°F
Weight	▪ 1/2 lb

Product Compliance

- NSF/ANSI 14
- NSF 61
- ASTM F877
- CSA B137.5
- ASSE 1061

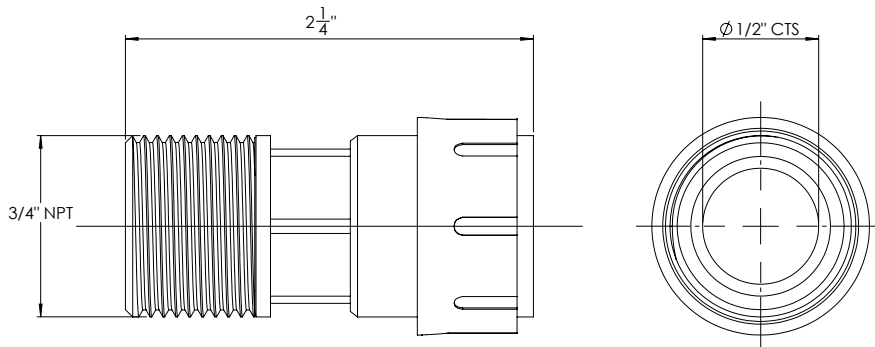

Do not use for gas, fuel oil or compressed air applications

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.