## **Durable Design**

- Stainless steel interior & exterior
- Coated evaporator coil
- 3 height adjustable, heavy-duty, PE coated wire shelves per section
- LED interior lighting
- Digital temperature display
- Door locks with keys
- Simple plug-in installation

## **Energy Efficiency**

- Self-closing door with stay open feature
- Seals tight with magnetic vinyl gasket
- Open door alert beeps when door is open for 3 minutes
- Foamed-in place high-density polyurethane insulated body, CFC-Free
- Large evaporator & condenser for quick cooling and greater efficiency

#### **Superior Quality**

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL guaranteeing quality standards
- 4" heavy duty, locking front casters
- Easy grip handles
- Entirely self-contained system
- Automatic defrost system
- Digitally controlled temperature system
- Accommodates full-size bun sheet pans
- Easily adjustable shelf height
- Includes Bleeder Valve to release the negative pressure in the storage room
- Internal storage capacity is 72 cu. ft.
- NEMA 5-20 plug (Refrigerator) or NEMA L14-20P (Freezer)
- Compressor: Refrigerator 3/4 HP / Freezer 1 ½ HP
- Holding temperature: Refrigerator 33°F to 39°F / Freezer 5°F to -9.4°F



# **Triple Door Series**

Refrigerator & Freezer Top Mount Compressor

KTSR-3 / KTSF-3



Project Name:	
Location:	
Item:	Qty:
Model:	




5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832


12000 Biscayne Blvd., Suite # 108 Miami, FL, United States 33181 Telephone: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100



## Technical Drawings KTSR-3 & KTSF-3

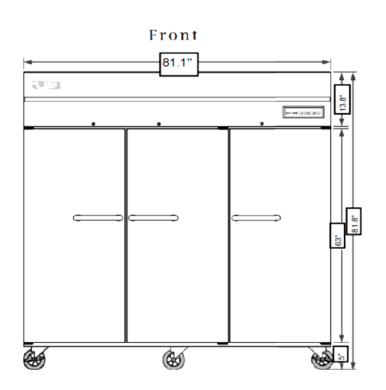

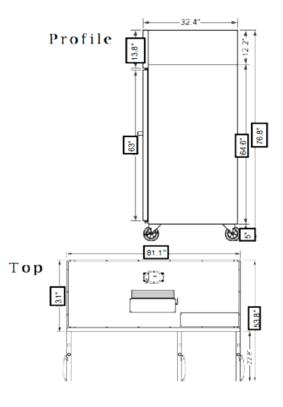

Model Number	Description	# of Doors	# of Shelves	Capacity (cubic ft)		Internal Dimensions (W x D x H in)	Compressor Size	Voltage / Frequency	Amps	Working Temp	Refrigerant	Ship Weight (lbs)
KTSR -3	Top Mount Triple Door Refrigerator	3	9	67.9	81.1 x 32.75 x 81.8	77.2 x 24.3 x 53.8	3/4	115V 60 HZ	11.1	33°F to 39°F	R134a	571
KTSF -3	Top Mount Triple Door Freezer	3	9	67.3	81.1 x 32.75 x 81.8	77.2 x 24.3 x 53.8	1 1/2	208 -230V 60 Hz	6.0	5°F to -9.4°F	R404a	600

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.







5-20P

KTSR-3

NEMA L14-20P KTSF-3

Warranty: 36 months parts & labor. Additional 24 months on compressor (parts only)

**KOOL-IT** is a registered trademark of MVP Group. Specifications subject to change without notice.



5659 Royalmount Ave.
Montreal, QC, Canada H4P 2P9
Telephone: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com

12000 Biscayne Blvd., Suite # 108 Miami, FL, United States 33181 Telephone: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100