



Maxx Cold Select Series | The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
(954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

# UNDERCOUNTER REFRIGERATORS

Model: ☐ MXSR29U 1 Door ☐ MXSR48U 2 Door ☐ MXSR60U 2 Door

International Model:  
Add -50 (220V/50Hz/1Ph)



MXSR29U



MXSR48U



MXSR60U

Maxx Cold Select Series Undercounter Refrigerators are designed for performance – holding your products at their ideal storage conditions. These undercounter refrigerators make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service if properly maintained. The unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.

## FEATURES

- Easy to grip, stainless steel, self-closing doors with integrated door handles
- 4 Casters (2 locking, 2 non-locking)
- Adjustable shelves (one per section/door)
- Integrated condensate evaporator pan eliminates the need for a floor drain connection
- Available in various sizes to suit your spatial and storage volume application requirements

## TEMPERATURE

- Holding temperature: 33° to 41°F (1° to 5°C)
- Utilizes environmentally friendly refrigerant R290A
- Efficient, forced-air refrigeration system delivers even temperature regulation throughout the food storage compartment
- Readily adjustable solid state control scheme with digital temperature display
- Oversized refrigeration and efficient foam insulation provide for rapid recovery and excellent temperature regulation

## CONSTRUCTION


- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Rear-accessed utility compartment provides space efficiency as well as easier servicing while conserving energy consumption
- Easily replaceable dart-style magnetic compression gaskets

## REFRIGERANT

Environmentally-friendly R-290A, with the lowest global warming potential value (3) of any commercially available refrigerant

## ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)  
(additional voltage options are available)  
Cord set includes plug & 9.8' (3m) cord



NEMA 5-15P



Certified to  
ANSI NSF 7



Certified to  
ANSI UL 471



DOE 2017  
Compliant

## Maxx Cold Select Series WARRANTY (USA / CANADA)


One (1) year parts  
One (1) year on-site labor  
Four additional (4) years compressor (part only)  
Administered by The Legacy Companies, 877.368.2797  
24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

3/12/18 15:19

# UNDERCOUNTER REFRIGERATORS

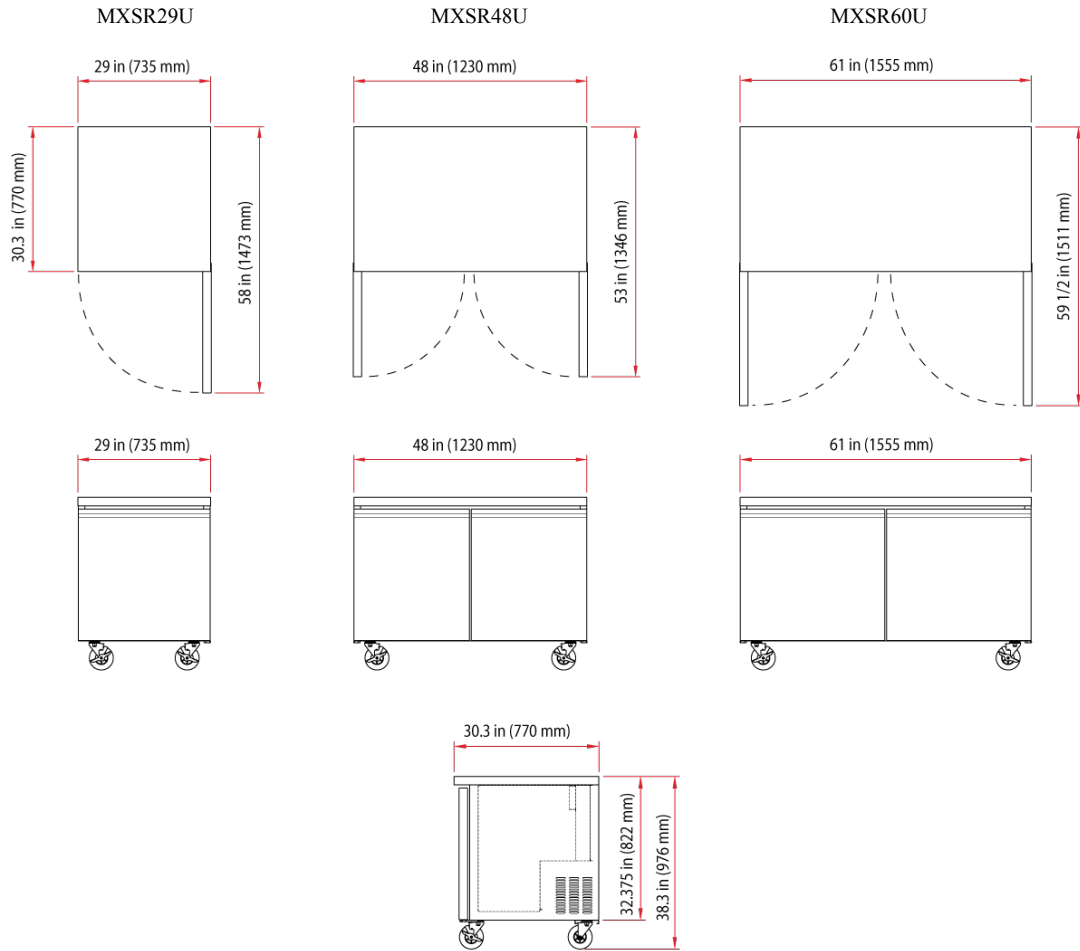

\*Shorter or taller optional caster sets are available to suit your application requirements

|                | Exterior Dimensions<br>in / mm       | Interior Dimensions<br>in / mm       | Depth With Door(s) Open<br>in / mm | Capacity            | Temperature Range         | Voltage   | Average Amp Draw | Shelves | Unit Weight      |
|----------------|--------------------------------------|--------------------------------------|------------------------------------|---------------------|---------------------------|-----------|------------------|---------|------------------|
| <b>MXSR29U</b> | 29 x 30.3 x 38.3<br>735 x 770 x 976  | 24 x 23.4 x 26.6<br>610 x 636 x 676  | 58 / 1473                          | 6.7 Cu Ft<br>184 L  | 33° to 41°F<br>1° to 5° C | 115V/60Hz | 3.6              | 1       | 143 lb<br>65 kg  |
| <b>MXSR48U</b> | 48 x 30.3 x 38.3<br>1230 x 770 x 976 | 43 x 23.4 x 26.6<br>1105 x 636 x 676 | 53 / 1346                          | 11.1 Cu Ft<br>340 L | 33° to 41°F<br>1° to 5° C | 115V/60Hz | 4.3              | 2       | 242 lb<br>110 kg |
| <b>MXSR60U</b> | 61 x 30.3 x 38.3<br>1555 x 770 x 976 | 56 x 23.4 x 26.6<br>1430 x 636 x 676 | 59.5 / 1511                        | 14.1 Cu Ft<br>439 L | 33° to 41°F<br>1° to 5° C | 115V/60Hz | 5.6              | 2       | 265 lb<br>120 kg |

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
 By using the information provided, the user assumes all risks in connection with such use.