



Maxx Cold | The Legacy Companies  
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# TOP MOUNTED REACH-IN FREEZERS

Model:  MCFT-23FD  MCFT-49FD  MCFT-72FD

International Model:  
 Add -50 (220V/50Hz/1Ph)

MCFT-23FD



MCFT-49FD



MCFT-72FD

Maxx Cold top mounted compressor reach-in freezers are built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of reliable service, maximum durability and is easy to clean. Maxx Cold units are designed to meet the requirements of the most discriminating customer.

### FEATURES

- Easy to grip recessed door handles
- Adjustable heavy duty wire shelves (3 per section/door)
- Four (4) or Six (6) 4" diameter casters standard
- Open door alert, beeps when door has been open for three minutes
- Locking doors
- Automatic interior lighting
- Available in 120V/60Hz, 220V/50Hz & 230V/60Hz

### TEMPERATURE

- Holding temperature: -10° to 10°F (-23° to 12°C)
- Utilizes environmentally friendly refrigerant R404A
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic defrost system

### CONSTRUCTION

- Durable, easy to clean stainless steel exterior and interior
- Cord set includes plug & 9.8' (3m) cord
- CFC-free Polyurethane insulated walls and doors

### REFRIGERANT

CFC & HCFC free R-404A

NEMA 5-15



MCFT-23FD/49FD

NEMA L14-20R



MCFT-72FD

### ELECTRIC

MCFT-23FD/49FD: 120/60Hz/1 Ph (NEMA 5-15)  
 MCFT-72FD: 220V/60Hz/1 Ph (NEMA L14-20R)  
 International 220V/50Hz & 230V/60Hz models available as options



Certified to  
 ANSI-NSF 7



Certified to  
 ANSI UL 471

### Maxx Cold WARRANTY (USA / CANADA)

Three (3) years parts and on-site labor  
 Five additional (5) years compressor (part only)  
 Administered by The Legacy Companies, 877.368.2797  
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.




Maxx Cold | The Legacy Companies  
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

## TOP MOUNTED REACH-IN FREEZERS


MCFT-23FD

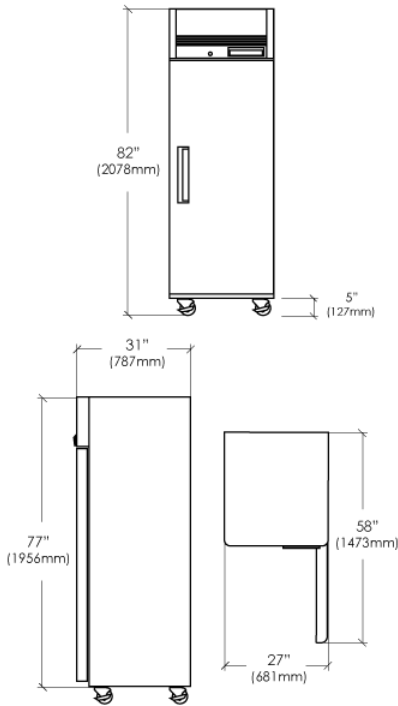

MCFT-49FD

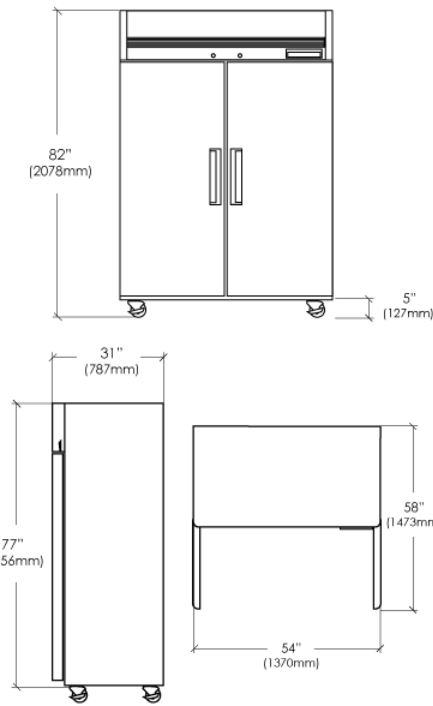

MCFT-72FD

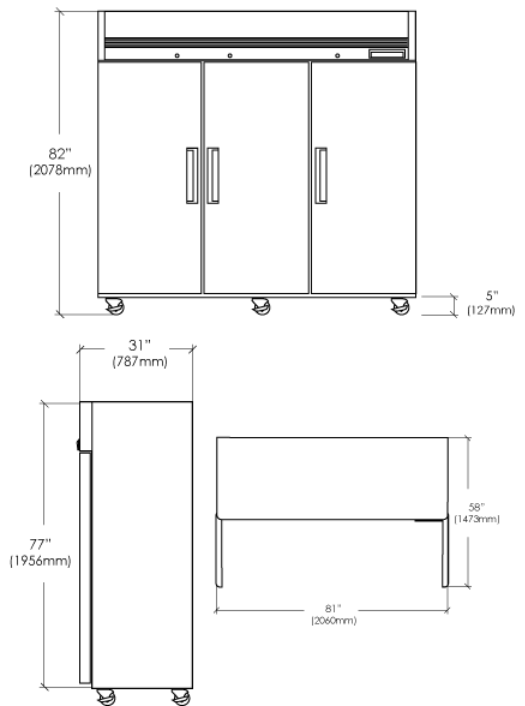

\*Shorter caster options are available to bring overall unit height under 80"

	Dimensions* in / mm	Capacity	Temperature Range	Voltage	Average Amp Draw	Unit Weight	Shelves
<b>MCFT-23FD</b>	27 x 31 x 82 681 x 787 x 2078	19 Cu Ft 541 L	-10 - 10° F -23° - 12° C	120V/60Hz/1	1.6	273 lb 124 kg	3
<b>MCFT-49FD</b>	54 x 31 x 82 1370 x 787 x 2078	49 Cu Ft 1387 L	-10 - 10° F -23° - 12° C	120V/60Hz/1	3.8	418 lb 190 kg	6
<b>MCFT-72FD</b>	81 x 31 x 82 2060 x 787 x 2078	72 Cu Ft 2039 L	-10 - 10° F -23° - 12° C	220V/60Hz/1	2.6	595 lb 270 kg	9

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
 By using the information provided, the user assumes all risks in connection with such use.