




SERVING THE FOOD INDUSTRY SINCE 1951

PRE-RINSE ASSEMBLY

- Solid construction
- Flexible stainless steel hose
- Spray Valve
- Check valve prevents cross-flow
- Best used in food service, commercial kitchens, and restaurants

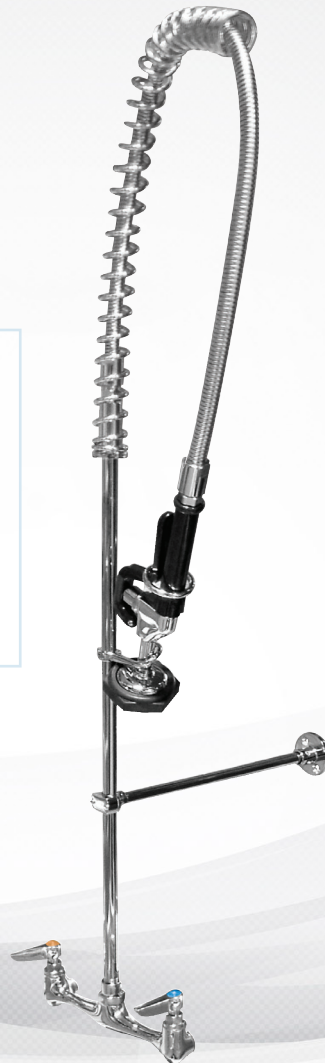

22123



22124



WARRANTY



Authorized Dealer

FAUCETS

PRE-RINSE ASSEMBLY | ITEMS 22123, 22124



PRE-RINSE ASSEMBLY WITHOUT CENTER FAUCET

TECHNICAL SPECIFICATION

ITEM NUMBER	22123
FAUCET	n/a
RISER BRASS PIPE	20" / 508 mm
STEEL HOSE	44" / 1117.6 mm
WALL BRACKET	6" (152.4 mm) or 12" (304.8 mm)
WALL MOUNTED TYPE	8" (203.2 mm) o.c
PACKAGING WEIGHT	10 lbs. / 4.5 kg.
PACKAGING DIMENSIONS	25" x 13" x 3" / 635 x 330.2 x 76.2 mm



22123

PRE-RINSE ASSEMBLY WITH CENTER FAUCET

TECHNICAL SPECIFICATION

ITEM NUMBER	22124
FAUCET	Included (12.5" / 317.5 mm)
RISER BRASS PIPE	20" / 508 mm
STEEL HOSE	44" / 1117.6 mm
WALL BRACKET	6" (152.4 mm) or 12" (304.8 mm)
WALL MOUNTED TYPE	8" (203.2 mm) o.c
PACKAGING WEIGHT	12 lbs. / 5.4 kg.
PACKAGING DIMENSIONS	25" x 13" x 3" / 635 x 330.2 x 76.2 mm



22124

REPLACEMENT CARTRIDGES

ITEM	DESCRIPTION
27226	Replacement hot cartridge for add-on faucet on 22124
27330	Replacement cold cartridge for add-on faucet on 22124
28680	Replacement hot cartridge for 22123 and 22124
28681	Replacement cold cartridge for 22123 and 22124

*Low lead faucets contain less than 0.25% lead content

OMCAN INC.

Telephone: 1-800-465-0234
 Fax: (905) 607-0234
 Email: sales@omcan.com
 Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2015.E.O.E