

Specification/Data sheet


UltraVent® Recirculating hood 61/101 E - USA/Canada



Article number: 60.74.971

Description

- The condensation technology in the UltraVent absorbs and dissipates steam. There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

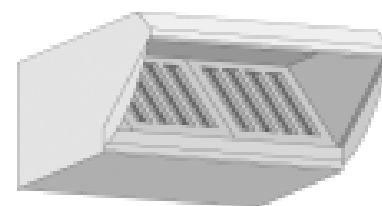

Special feature

High extraction power

- Proximity door contact switch
- Automatic increase of extraction power when cooking cabinet door is opened
- Waste water discharge through the unit, no additional discharge require

Certificates and Listings

- Approved for UL 197 and 507 and C 22.2, CSA 22.2 No. 109 and CSA 22.2 No 113-15
- EPA 202

Notes

- The local standards and regulations for ventilation systems must be adhered to.
- The UltraVent 61/101 E condensation hood can be used for right and left hand door units. Supplied with installation options for both variants. The combination with a left-hinge door restricts the extraction function of the UltraVent.
- Not for use with RATIONAL VarioSmoker
- Can be added to any 61/101 electric RATIONAL unit built after 2005 with adapter 60.72.431
- When used with type 61 units, use a raised base cabinet US III version UltraVent
- Not available for the base cabinet UG II catering due to height
- Grease filter left: 60.72.440
- Grease filter right: 60.72.441
- The UltraVent 61/101E can not be retrofitted for a Combi-Duo installation

Technical Info

- Connection: 100-125V 1 NAC 50/60 HZ
- Comes with 8'2" (2.5 m) power cord with 5-15 P plug
- Connected load: 225 W
- Extraction power: 165 - 335 ft³/min
- Operating noise level: 70 dBA
- Width: 33 5/8" (854 mm)
- Height: 17 3/4" (450 mm)
- Depth: 48 1/4" (1226 mm)
- Weight: 132 lbs (60kg)
- Needs 18" (450 mm) clearance above

Material

- Stainless steel (CNS 1.4301 /CNS 304)

Specification/Data sheet

UltraVent® Recirculating hood 61/101 E - USA/Canada

